


# 조절좌

-일반표준 안전고정형 미끄럼 방지 방진형-




<https://www.misumi-ec.com/kr/>

CAD 데이터 폴더명 : Leveling\_Foot

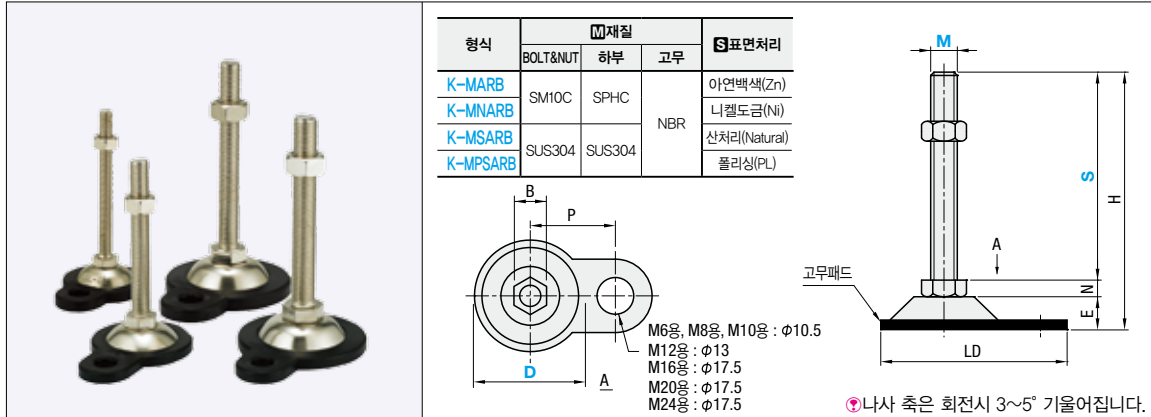

형식	치수(mm)										하부판 두께	허용하중 (4EA/kg)	W기준단가 (너트포함)					
	M	S	D	나사피치	H	N	E	B	LD	P			K-MARB	K-MNARB	K-MSARB	K-MPSARB		
K-MARB K-MNARB (스틸)	6	40	46	1.0	62	6	16	10	62.5	26.5	2.6t (SPHC) 2.5t (SUS304)	100						
		40			62								13					
	8	80	1.5	83	7	17	89.3	39	3t (SPHC) 3t (SUS304)	800								
		60		83							17							
	10	100	1.75	81	108	10	23	30	118	56	1000							
		50										108	23					
	12	125	2.0	103	136	13	28	36	138	67	4.5t (SPHC) 4.0t (SUS304)	1500						
		75											136	28				
	16	150	2.5	130	166	16	36	244	244	294	2200							
		180										166	36					
	20	180	3.0	144	194	16	36	244	244	294	2200							
		200										194	36					
24	200	3.0	144	194	16	36	244	244	294	2200								
	250										194	36						



견적 및 발주는 미스미 웹발주 시스템을 이용하여 주십시오. (<https://www.misumi-ec.com/kr/>)

Order 주문예 **형식** - M - S - D  
K-MARB - 6 - 40 - 46

Delivery 출하일 **3** 일째발송


# 조절좌

-2홀 안전고정형-



<https://www.misumi-ec.com/kr/>

CAD 데이터 폴더명 : Leveling\_Foot

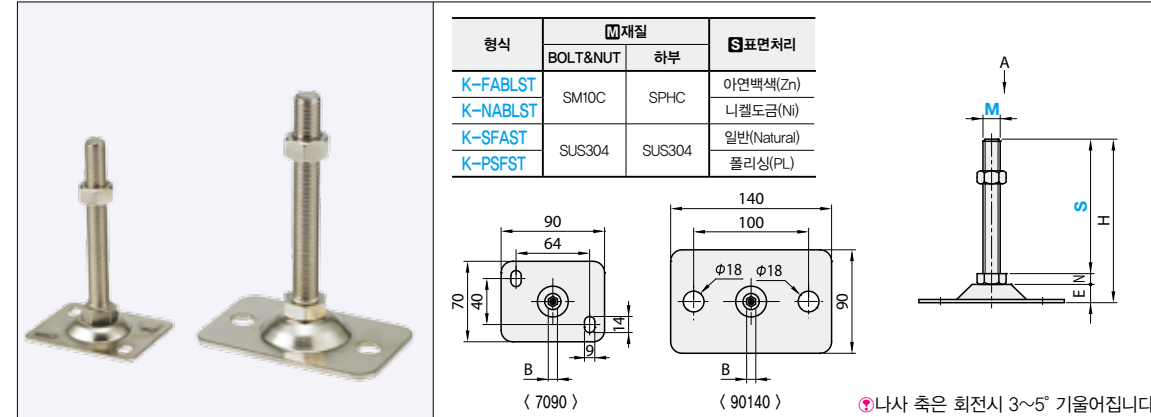

형식	치수(mm)										하부판 두께	허용하중 (4EA/kg)	W기준단가 (너트포함)					
	M	S	D	나사피치	H	N	E	B	K-FABLST	K-NABLST			K-SFAST	K-PSFST				
K-FABLST K-NABLST (스틸)	6	40	46	1.0	62	6	16	10	62.5	26.5	2.6t (SPHC) 2.5t (SUS304)	100						
		40			62								13					
	8	80	1.5	81	108	10	23	30	118	56	1000							
		60										108	23					
	10	100	1.75	103	136	13	28	36	138	67	4.5t (SPHC) 4.0t (SUS304)	1500						
		50											136	28				
	12	125	2.0	130	166	16	36	244	244	294	2200							
		75										166	36					
	16	150	2.5	144	194	16	36	244	244	294	2200							
		180										194	36					
	20	180	3.0	144	194	16	36	244	244	294	2200							
		200										194	36					
24	200	3.0	144	194	16	36	244	244	294	2200								
	250										194	36						



견적 및 발주는 미스미 웹발주 시스템을 이용하여 주십시오. (<https://www.misumi-ec.com/kr/>)

Order 주문예 **형식** - M - S - D  
K-FABLST - 12 - 50 - 7090

Delivery 출하일 **3** 일째발송