

# LOCATING RINGS

☎ Non JIS material definition is listed on P.1351 - 1352

☎ Combination examples of locating rings **P.735**

**RoHS** **LRBS** For bolt type—2 holes—

**RoHS** **LRBF** For bolt type—4 holes—

**RoHS** **LRBD** For bolt type

**RoHS** **LRJS** For JIS type

**RoHS** **LRJST** Runner lock pin pressing type

**RoHS** **LRK** Large diameter type

Applicable bolts	Bolt hole		t	d	A	Part Number		U/Price
	d <sub>2</sub>	d <sub>1</sub>				Type	D	
M5	5.5	9	5	40	50	LRBS —2 holes—	60	10
								15
								20
M6	6.5	11	3	70	85	LRBS —2 holes—	100	15
								20
								25
			8	80	95	LRBF —4 holes—	110	10
								15
								20
8	90	105	LRBF —4 holes—	120	15			
					20			
					25			
M8	9	14	6	110	130	LRBF —4 holes—	150	15
								20

Quotation

Applicable bolts	Bolt hole		t	R	d	A	Part Number		U/Price
	d <sub>2</sub>	d <sub>1</sub>					Type	D	
M6	6.5	11	9	5	70	85	LRBD	100	15
									20
									40
			20	10	90	105	LRBD	120	15
									20
									45

Quotation

Applicable bolts	Bolt hole		t	A	Part Number			U/Price									
	d <sub>2</sub>	d <sub>1</sub>			Type	D	T		B	1~9							
M6	6.5	11	6.5	85	LRJS	100	15	35	40	50							
							20	35	40	50							
							25	35	40	50							
							M8	9	14	8.6	100	LRJS	150	15	40	50	
														20	35	40	50
														20	35	40	50

Quotation

Applicable bolts	Bolt hole		t	A	Part Number		U/Price
	d <sub>2</sub>	d <sub>1</sub>			Type	D	
M6	6.5	11	6.5	85	LRJST	100	15
							20

Quotation

Applicable bolts	Bolt hole		D <sub>1</sub>	d	A	Part Number		U/Price
	d <sub>2</sub>	d <sub>1</sub>				Type	D	
M6	6.5	11	130	85	115	LRK	100	10
								150

Quotation


**RoHS** **LRBW** Reversible Locating Rings—For bolt type—

**RoHS** **LRSS** For shoulder type

**RoHS** **LRSD** For shoulder type

**RoHS** **LAR** Locating Ring Adapter

**ex** Example

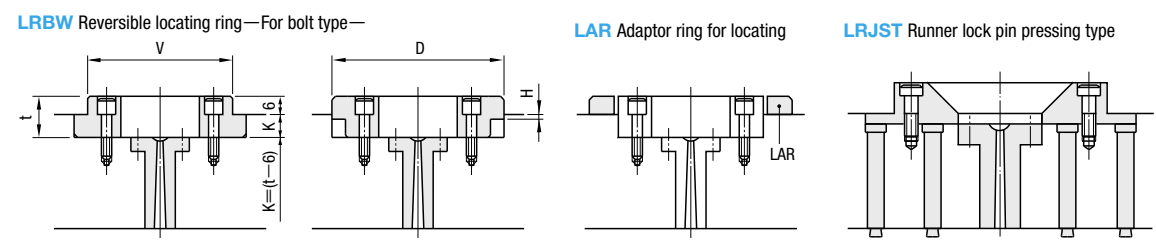

- It can be installed from both sides.
- Outer diameter of locating ring can be selected to suit a molding machine.  
When No.=100・120・130; K=8, H=2  
When No.=100-16・120-16・130-16; K=10, H=4
- Making the locating ring diameter wider by one size without locating ring replacement is possible by installing LAR on the outer side of locating ring.
- A wide range of runner lock pins can be pressed by the head of locating ring.

Applicable bolts	Bolt hole		d	B	V	D	t	Part Number		U/Price
	d <sub>2</sub>	d <sub>1</sub>						Type	No.	
M5	5.5	9	40	50	60	100	14	LRBW	100	16
										100-16
										120
M6	6.5	11	70	85	100	120	14	LRBW	120	16
										120-16
										130
										130-16

Quotation

Applicable bolts	Bolt hole		t	R	d	A	Part Number		U/Price								
	d <sub>2</sub>	d <sub>1</sub>					Type	D		T	1~9						
M5	5.5	9	4.5	5	40	50	LRSS	60	10								
									15								
									20								
									25								
									M6	6.5	11	3.5	70	85	LRSS	100	10
																	15
20																	
M6	6.5	11	8	5	80	95	LRSS	110	15								
									20								
									25								
									15								
M8	9	14	6	5	110	130	LRSS	150	15								
									20								
									25								
									25								

Quotation

Applicable bolts	Bolt hole		t	R	d	A	Part Number		U/Price									
	d <sub>2</sub>	d <sub>1</sub>					Type	D		T	1~9							
M6	6.5	11	20	10	70	85	LRSD	100	35									
									40									
									45									
									M6	6.5	11	20	10	90	105	LRSD	120	35
																		40
																		45

Quotation

d	Part Number		U/Price
	Type	D	
60	LAR	100	10
			15
			20
100	LAR	120	10
			15
			20

Quotation

☎ Order **Part Number** — **T** — **B**  
**LRBS 120** — 15  
**LRBW100**  
**LRJS 100** — 15 — 35

☎ Days to Ship **Quotation**

☎ Price **Quotation**