




■ Mold Coupler Series

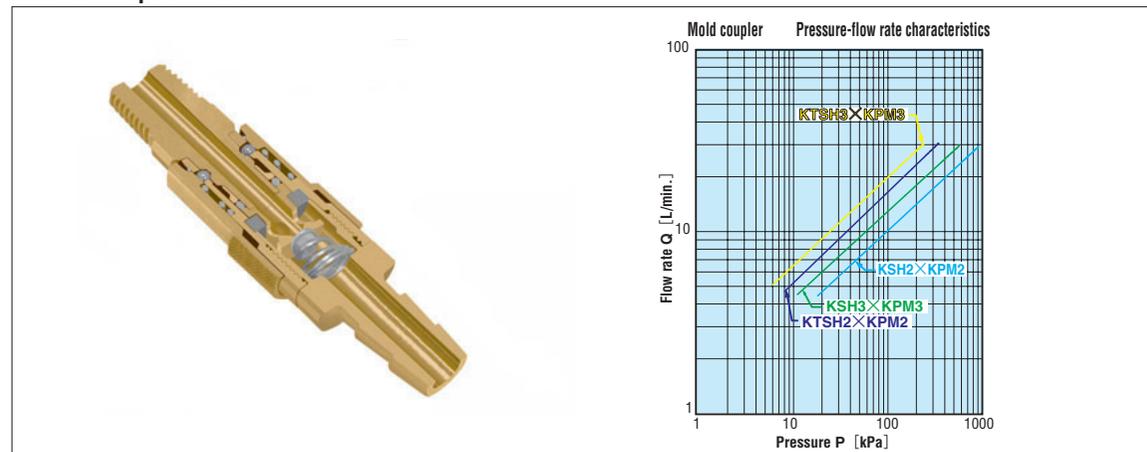


■ Compact double valves Cooling High Flow Couplers Series

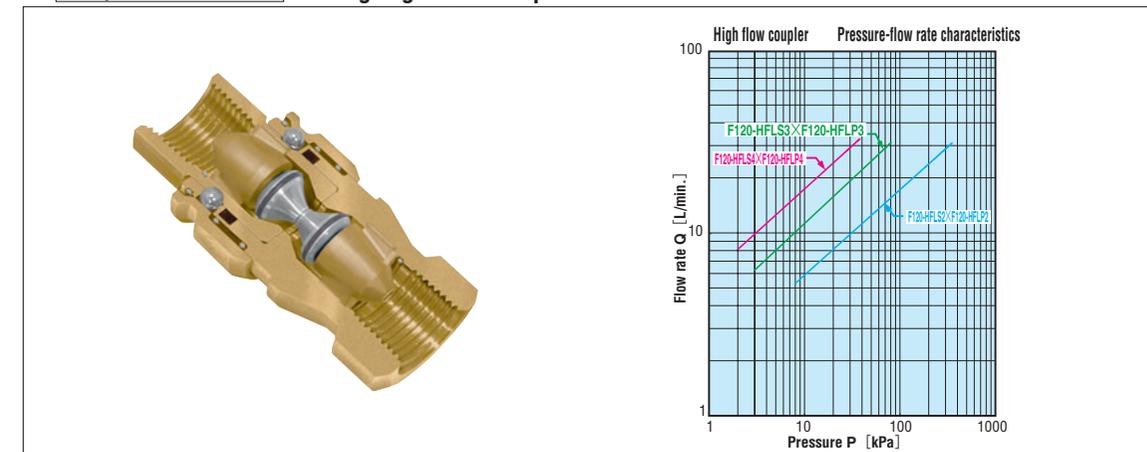


■ High Coupler Series for Cooling Pipe

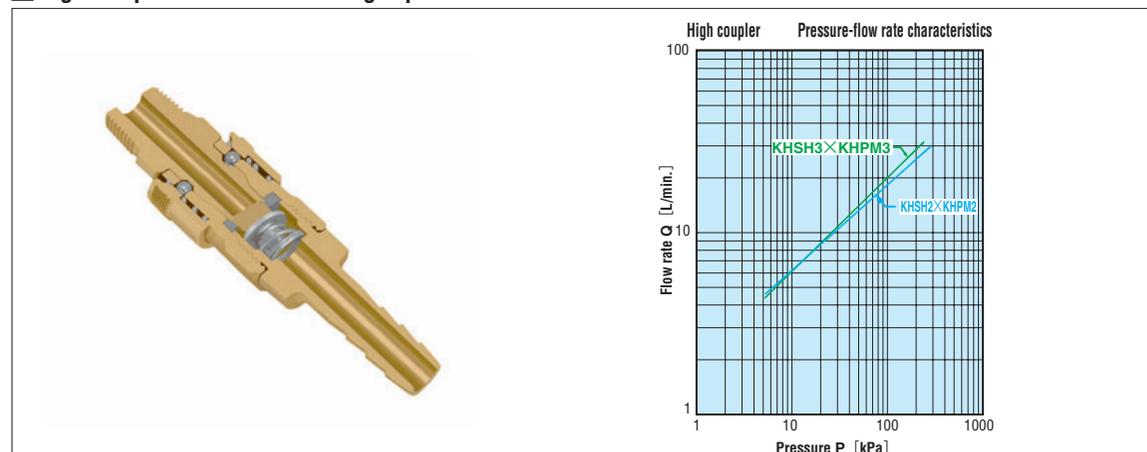


■ Valveless TSP Coupler Series for Cooling

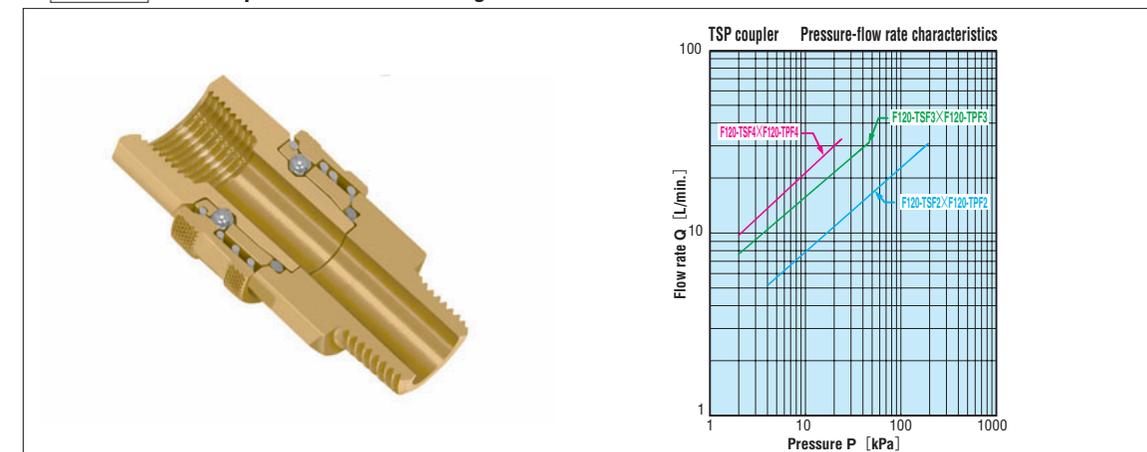

■ Large Flow Mold Couplers Series

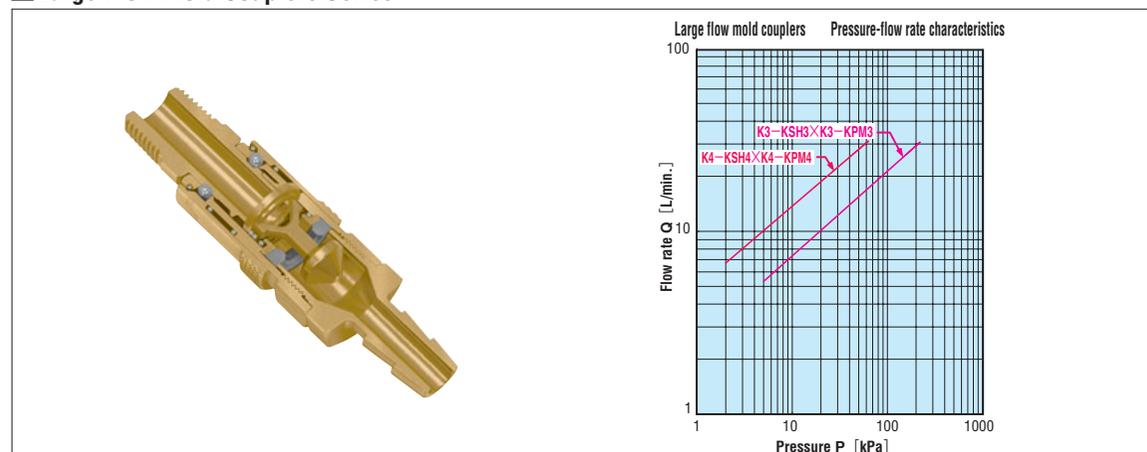

■ Double valves SP Coupler Series for Cooling

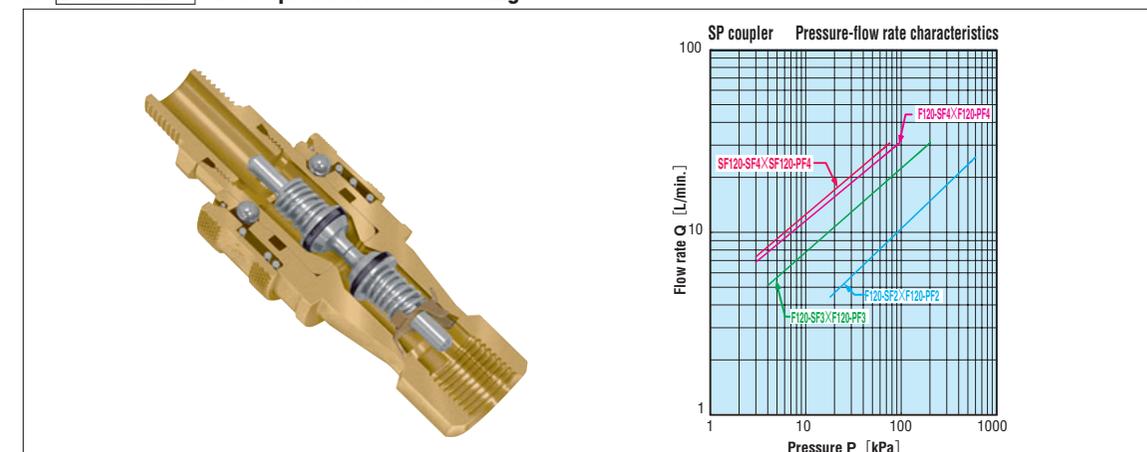

⚠ Graphs of pressure-flow rate characteristics indicate the pressure P (kPa) and flow rate Q (L/min.) when the cooling water flows.
 (Fluid in measurement: water, temperature: 10°C ± 3°C, direction of flow: socket → plug) ⚠ Shown are examples of measurement values and are not guaranteed values.

⚠ Graphs of pressure-flow rate characteristics indicate the pressure P (kPa) and flow rate Q (L/min.) when the cooling water flows.
 (Fluid in measurement: water, temperature: 10°C ± 3°C, direction of flow: socket → plug) ⚠ Shown are examples of measurement values and are not guaranteed values.