MiSUMi

AC Servo driver
E-DHAS□□P Series (Pulse Type)

User Manual

Ver1.1

Table of Contents

Table of Contents **2**

Preface **6**

About This Manual **7**

Purpose and Scope 7
Intended Readers and Required Competence 7
How to Use This Manual 7

Safety Precautions **8**

Warranty Terms **11**

Chapter 1 Overview **12**

1.1 Product Introduction 12
1.2 Incoming Inspection 12
1.3 Model Number Structure 13
1.3.1 Servo Driver 13
1.3.2 Servo Motor 13
1.4 Component Description 14
1.4.1 Servo Driver Ports And Connectors 14
1.4.2 Motor Ports and Connectors 16
1.5 Servo Driver Technical Specifications 16
1.5.1 Electrical Parameters 16
1.5.2 General Specifications 17
1.6 Motor General Specifications 20
1.6.1 Mechanical Characteristic Specifications 20
1.6.2 Electrical Specifications of Motor's Brake 21
1.6.3 Load Moment of Inertia 21
1.7 Motor Specifications 21

Chapter 2 Quick Start Guide **25**

2.1 Commissioning Workflow 25
2.2 Unpacking Checklist 25
2.3 Installation Checklist 25
2.4 Wiring Checklist 26
2.5 First Power-On 27
2.6 Servo ON and Trial Run 27
2.7 Commissioning Completion Checklist 29
2.8 Troubleshooting Quick Check 29

Chapter 3 Installation **30**

3.1 Servo driver Installation 30
3.1.1 Installation Site 30
3.1.2 Installation Environment 30
3.1.3 Servo Driver Dimension 31
3.1.4 Space requirement for installation 32
3.2 Servo Motor Installation 33
3.2.1 Installation Location 33
3.2.2 Installation Environment 33
3.2.3 Motor Dimensions 34
3.2.4 Installation Method and Precautions 36
3.3 Peripheral Devices 37
3.3.1 Fuses 37
3.3.2 Electromagnetic Contactors 37
3.3.3 Circuit Breakers 38
3.3.4 AC Input Reactor 38
3.3.5 EMC Filter 38
3.3.6 Magnetic Rings and Clamps 38

Chapter 4 Wiring **39**

4.1 E-DHAS□□P Wiring Diagram 39

4.2 Electrical Wiring Diagram 40
4.2.1 Position Control Mode Wiring Diagram 40
4.2.2 Velocity/Torque Control Mode Wiring Diagram 41
4.3 Servo Driver Ports 43
4.4 X1 Main/Control Circuit Power Supply 44
4.4.1 Main Power Supply Cable Selection 45
4.4.2 Single/Three Phase Power Supply Wiring Diagram 46
4.4.3 Regenerative Resistor Selection and Connections 47
4.5 X2 Motor Power Supply 53
4.6 X3 Holding Brake 55
4.7 CN1 I/O Signal 57
4.7.1 CN1 Full Pin Assignment Table 57
4.7.2 Pulse Command Wiring Examples 59
4.7.3 CN1 Signal Cable Selection 61
4.8 CN2 Motor Encoder 61
4.9 CN3/CN4 - RS485 Communication Port 64
4.10 CN6 Safe Torque Off (STO) Port 65
4.11 CN7 2nd Encoder (External) 67
4.12 USB Type-C Tuning Port 68
4.13 I/O Signals 69
4.13.1 Pulse Input Circuit 69
4.13.2 Analogue Input Circuit 71
4.13.3 Digital Inputs 72
4.13.4 Digital Outputs 73
4.13.5 Encoder Frequency Divider Output Circuit 74
4.13.6 Set DI Signals 75
4.13.7 Set DO Signals 81
4.14 Measures Against Electromagnetic Interference 84
4.14.1 Grounding Connection and Other Anti-Interference Wiring Connections 84
4.14.2 Using Line Filter 84

Chapter 5 Servo Driver Operation 86

5.1 Front Panel 86
5.2 Panel Display and Operation 87
5.2.1 Panel Operation 87
5.2.2 Front Panel Locking 88
5.2.3 Data Monitoring Mode 88
5.2.4 Parameters Setting Mode 99
5.2.5 Auxiliary Function 100
5.2.6 Abnormal Alarm 105
5.2.7 Parameter Saving 105
5.2.8 Front Panel Warning Indicator 106
5.3 Get Started with Driver Operation 107
5.3.1 Checklist Before Operation 107
5.3.2 Power On 107
5.3.3 Trial Run 107
5.3.4 Debugging Software 108
5.3.5 Front Panel Trial Run 109
5.3.6 Trial Run Using Debugging Software 110

Chapter 6 EDrive Quick Commissioning Guide 111

6.1 Software Installation 111
6.2 Connect to Drive 111
6.3 First Motor Movement 115
6.4 Auto Tuning 117
6.5 Read & Save Parameters 121
6.5.1 All Parameters 121
6.5.2 Parameter Modification and Download 122
6.5.3 Parameter Save to PC 123
6.5.4 Read Parameter File From PC 123
6.5.5 Compare Parameters 124
6.5.6 Initialization 124
6.5.7 Save to Drive 125
6.5.8 Open Parameter File, Object Dictionary File and Scope File 125
6.5.9 Offline Parameter File Modification 126
6.6 Scope Measurement 126

6.6.1 Single Capture 128
6.6.2 Continuous Capture 128
6.6.3 Zoom In/Out 128
6.6.4 Cursor Function 129
6.6.5 Overlap Scop 129
6.7 Fault Diagnosis 129

Chapter 7 Control Mode 132

7.1 Position Control 134
7.1.1 Pulse Input and Direction Settings 136
7.1.2 Electronic Gear Ratio 138
7.1.3 Position Command Filter 139
7.1.4 Frequency Divider Output 140
7.1.5 Positioning Completed INP Signal Output 142
7.2 Velocity Control Mode 143
7.2.1 Velocity Command Input Control 145
7.2.2 Velocity Command Acceleration/Deceleration 147
7.2.3 Velocity Reached Signal AT-SPEED Output 149
7.2.4 Velocity Coincidence V-COIN Signal Output 149
7.2.5 Zero Speed Clamp 150
7.3 Torque Control 151
7.3.1 Torque Command Input Control 153
7.3.2 Torque Velocity Limit 154
7.3.3 Torque Limit (TL-SEL) 155
7.4 Hybrid Control Mode 156

Chapter 8 Tuning 157

8.1 Gain Adjustment 157
8.2 Inertia Ratio Identification 160
8.2.1 Online inertia determination 160
8.2.2 Offline inertia determination 160
8.3 Easy Tuning 164
8.3.1 One-Click Tuning 164
8.3.2 Single Parameter Tuning 171
8.4 Auto Gain Adjustment 181
8.5 Manual Gain Adjustment 186
8.5.1 Parameters Adjustment Under Different Control Modes 188
8.5.2 Gain Switching 189
8.5.3 Model Following Control (MFC) 193
8.5.4 Zero Tracking Control 194
8.5.5 Feedforward Gain 195
8.5.6 3rd Gain Switching 198
8.5.7 Friction Compensation Function 200
8.6 Vibration Suppression 202
8.6.1 Mechanical Resonance Suppression 202
8.6.2 End Vibration Suppression 203
8.6.3 Mechanical Properties Analysis 205

Chapter 9 Modbus Communication 206

9.1 RS232 and RS485 Connection Diagram. 206
9.2 RS485 communication port 207
9.3 Modbus Protocol 207
9.3.1 Read Data 0x03 208
9.3.2 Write Single Data Function Code 0x06 209
9.3.3 Write Multiple Data 0x10 210
9.3.4 Reply Error 210
9.4 Frequently Occurred Issues and Solutions with RS485 Communication. 211
9.4.1 Frequently Occurred Issues 211
9.4.2 Step-by-Step Problem Solving 212

Chapter 10 PR Function 213

10.1 PR Function Introduction 214
10.2 Control Parameters 215
10.3 PR Motion 217
10.3.1 Homing 217
10.3.2 Position Limit and Emergency Stop 222

10.3.3 JOG 222
10.3.4 Path Motion 223
10.4 PR Control 226
10.4.1 PR Module in EDrive 226
10.4.2 Physical I/O 228
10.4.3 485 Communication 230
10.4.4 Path Trigger 231
10.5 PR motion 232
10.5.1 Trigger Using Physical I/O 232
10.5.2 Control Using 485 Communication 234

Chapter 11 Special Functions 236

11.1 Multi-turn Absolute Encoder 236
11.1.1 Parameters Setting 236
11.1.2 Read Absolute Position 237
11.1.3 Absolute Encoder Related Alarm 241
11.1.4 Battery kit 242
11.2 Safety Feature 243
11.2.1 Max. Motor Rotational Speed Limitation 243
11.2.2 Emergency Stop Function 244
11.2.3 Servo Stopping Mode 245
11.2.4 Max. Duration for Motor to Stop After Disabling 246
11.2.5 External Brake Deactivation Output Signal BRK-OFF 246
11.3 Position Comparison 248
11.4 Gantry Function Application 254
11.4.1 Function Overview 254
11.4.2 Related Parameters 255
11.4.3 Implementation Steps 256
11.4.4 Precautions 259
11.5 Black Box 260
11.6 Full Closed Loop Control 262

Appendix I - Parameter 264

Parameters List 264
Parameters Description 276
[Class 0] Basic Settings 276
[Class 1] Gain Adjustments 287
[Class 2] Vibration Suppression 293
[Class 3] Velocity/Torque Control 299
[Class 4] I/O Monitoring Settings 306
[Class 5] Extension Settings 316
[Class 6] Other Settings 323
[Class 7] Factory Settings 327
[Class 8] PR Control Parameters 328
[Class 9] PR Control Path Parameters 336
[Class C] Position Comparison 352
[Class D] Gantry Settings 355

Appendix II - Warning and Alarm 358

Servo Driver Warning 358
Servo Driver Alarm 359
Alarm Handling 364
Alarm Clearing 378

Appendix III - Timing Chart 379

Servo Enabled 379
Servo Stop 380
Alarm Clearing 393

Preface

Thank you for purchasing the E-DHAS□□P Series AC Servo driver.
This series features dynamic braking, built-in brake output (no external relay required), and optional STO, gantry sync, and full closed-loop control. It is ideal for automation in industries like semiconductors, lithium batteries, photovoltaics, electronics, and machine tools—delivering high-performance solutions for improved efficiency.
This manual covers essential usage instructions, installation, basic setup, maintenance, and parameter details.
First-time users should read carefully. For any questions, please contact our technical support team.
Thank you for choosing us!

How to Obtain the Manual
This manual is not included with the product shipment.
To obtain the PDF electronic version, please visit the official MISUMI website:
Vietnam: *http://vn.misumi-ec.com*
Thailand: *https://th.misumi-ec.com*
Malaysia: *https://my.misumi-ec.com*
India: *https://in.misumi-ec.com*
Singapore: *https://sg.misumi-ec.com*
Indonesia: *https://id.misumi-ec.com*
and download it from the corresponding product series page.

Caution!
Improper operation may cause unexpected accidents. Please read this manual carefully before using the system.
Due to product improvements, the contents of this manual are subject to change without prior notice.
Our factory will not be responsible for any changes made by the user to the product, and the product warranty will be invalidated.

Caution: This equipment is not intended for use in residential environments and may not provide adequate protection for radio reception in such environments.

About This Manual

Purpose and Scope

This manual provides the information required to safely install, wire, configure, commission, operate, maintain, and troubleshoot the Servo Drive and Servo Motor system.
It is intended to help users achieve reliable operation while minimizing commissioning time and preventing equipment damage caused by incorrect installation or parameter settings.

This manual covers the following topics:

- Product overview and system configuration
- Installation requirements
- Electrical wiring
- Connector descriptions
- Control modes and operating principles
- Parameter configuration
- Commissioning procedures
- EDrive software operation
- Communication setup
- Built-in functions
- Maintenance
- Alarm diagnosis and troubleshooting

Intended Readers and Required Competence

This manual is intended for:

- Machine builders
- System integrators
- Electrical design engineers
- Mechanical engineers
- Commissioning engineers
- Maintenance engineers
- Technical support personnel

Readers should have basic knowledge of:

- Industrial electrical systems
- Servo motors and motion control
- AC power distribution
- Industrial wiring practices

Installation, commissioning, and maintenance shall be performed only by qualified personnel familiar with applicable electrical safety regulations.

How to Use This Manual

This manual is organized according to the typical engineering workflow, from product selection through commissioning and maintenance.
For first-time users, it is recommended to follow the chapters in sequence.
Experienced users may refer directly to the relevant chapters using the table of contents or index.
Important safety information should always be read before performing installation or commissioning.
Whenever a parameter or function is referenced, the corresponding chapter provides detailed descriptions, operating limitations, and related settings.

Safety Precautions

In order to prevent personal injury and property damage, the following statements are made regarding matters that must be followed. When reading this manual, please pay special attention to the following warning signs:

⚠Warning : “Warning” Incorrect operation may cause death or serious injury.
⚠Caution : “Caution” Incorrect operation may cause injury or equipment damage.
⚠Notice: “Notice” Improper use may damage the product or equipment.

Safety Rules
⚠Warning This product is not intended for safety-critical machinery or systems. Users must implement proper safety measures to prevent accidents.
Inspection
⚠Caution Do not install if the product or accessories are damaged or rusted upon unpacking. Do not install if there is water inside, missing parts, or damaged components. Check the packing list carefully; do not install it if it does not match the product.
⚠Notice Do not forcibly remove packaging or handle roughly to avoid damage to components. Do not use damaged or faulty products.
Storage and Transportation
⚠Caution Store and transport the product according to specified environmental conditions. Do not stack too high to prevent falls. Ensure proper packaging during transit. Do not drag cables, motor shafts, or encoders when handling servo motors. Avoid applying external force or impacts to servo drivers and motors.
⚠Notice Handle the product with care, lift and place gently, and watch your footing to prevent trips or drops, which may cause injury or damage. During storage or transport, avoid direct contact with terminals or drive circuits without electrostatic protection to prevent damage. Avoid storing or transporting in places exposed to water, rain, direct sunlight, strong electric or magnetic fields, or severe vibration. Do not store the product for more than 3 months; if stored longer, apply stricter protection and inspections. Do not mix-pack this product with items that could affect or damage it during transport.
Installation
⚠Warning Only trained professionals with electrical knowledge are allowed to operate. Operation by unqualified personnel is strictly prohibited

⚠Caution
Servo driver and Servo Motor:
Do not install on or near flammable materials to prevent fire.
Avoid vibration and strictly prohibit impacts.
Do not install if the unit is damaged or has missing parts.
Discharge static electricity before operating buttons or switches on the drive, or equipment damage may occur.
Servo driver:
Must be installed inside a control cabinet with sufficient protection rating.
Maintain adequate clearance from other devices.
Ensure proper heat dissipation. If installed in a sealed environment, use cooling devices (fans or air conditioners) to meet environmental requirements, or overheating/fire may result.
Prevent the entry of dust, corrosive gases, conductive materials, liquids, and flammable or explosive substances.
Servo Motor：
Must be mounted securely to prevent loosening due to vibration.
Prevent liquid ingress to avoid motor or encoder damage.
Do not strike the motor or shaft to avoid encoder damage.
The motor shaft must not be subjected to loads beyond its rated limits.

Wiring

⚠Caution
Only qualified personnel may perform wiring or inspection.
Wait at least 10 minutes after power-off before starting.
Properly ground the servo driver and motor to avoid electric shock.
Incorrect voltage or polarity may cause accidents or explosions.
Connect wires only after installation is complete.
Ensure wire insulation and avoid pinching to prevent shock.
Never wire, open covers, or touch circuits with power on.

⚠Caution
Wiring must be correct and secure to avoid malfunction or damage
Do not reverse U/V/W motor terminals or connect to AC power
Connect motor directly to the servo driver—no capacitors, inductors, or filters
Prevent conductive parts or wire ends from entering the drive
Keep wires and heat-sensitive parts away from heatsinks and motors
Do not reverse the flyback diode on output signal relays
Use cables with proper gauge and shielding; ground shield at one end
Follow ESD precautions and wear an anti-static wrist strap
For control circuits, use twisted shielded wire and ground the shield to the terminal

Power-On

⚠Warning
Before power-on, ensure proper installation and secure wiring of control, main power, and motor output circuits.
Do not touch any terminals while the product is powered on.

Debugging Operation

⚠Caution
Before power-on, confirm proper installation, secure wiring, and correct power within rating.
During setup, run motor unloaded first; verify settings before load testing to avoid damage.

Usage

⚠Caution An emergency stop circuit must be installed to immediately stop operation and cut power in case of an accident. Before resetting an alarm, ensure the run signal is off to prevent sudden restart. Use the servo driver only with the specified servo motor. Avoid frequently turning the servo system power on and off to prevent damage. The servo driver and motor may become hot during and shortly after operation; do not touch the heatsink or motor. Do not modify the servo system.
Troubleshooting
⚠Caution High voltage may remain in the servo driver for some time after power off; do not disconnect wires or touch terminals within 5 minutes. Only qualified personnel with proper knowledge should perform disassembly and maintenance.
⚠Caution After an alarm, troubleshoot and clear the cause, then reset the alarm before restarting. Keep away from the machine when power returns after a blackout, as it may start unexpectedly (the design should prevent hazards on restart).
System Matching
⚠Notice The servo motor's rated torque must exceed the effective continuous load torque. The load inertia to servo motor inertia ratio should be below the recommended value. The servo driver and motor must be used as a matched pair.

Other Notes **Dynamic brake**

- The dynamic brake should only be used for emergency stops during faults or sudden power loss. Do not trigger faults or power loss frequently.
- At high speeds, ensure the dynamic brake has at least a 5-minute interval between activations to prevent damage to the internal brake circuit.
- In rotating machinery, after dynamic braking stops the motor, the motor may be driven by the load on the shaft and act as a generator. Continuous external rotation for a long time can cause short-circuit current in the dynamic brake, potentially leading to smoke, fire, or motor damage.

Safety Signs To ensure safe operation, always follow the safety signs on the equipment. The safety signs are explained as follows:



Warranty Terms

For products purchased from MISUMI (the “Company”) via official product catalogs or MISUMI’s official websites (including all global/regional domains, affiliated platforms, apps, and mini-programs—collectively, the “Official Website”), the warranty is governed by the usage guidelines and warranty terms stated on the Official Website or in the catalogs (“Warranty Terms”).
These Warranty Terms do not apply to custom-made products. Placing an order or using a product implies acceptance of the Warranty Terms.
If the product includes a manufacturer’s warranty, that warranty shall take precedence over these Warranty Terms.
Warranty Scope and Period
The warranty covers defects such as damage, deformation, or faults (collectively “defects”) attributable to the Company. The customer must document and notify the Company in writing within the warranty period (defined below). If the Company confirms the defect is its responsibility, it will repair or replace the defective product partially or fully at no cost.
However, if any of the following conditions apply, or if the Company’s website or product catalog states that repair or replacement is not authorized, the warranty will not apply.

1) Defects from use outside general industrial applications, excluding transport vehicles, medical devices, and household electronics.
2) Defects from use in aerospace, nuclear, military, or weapons applications.
3) Defects caused by customer’s careless or incorrect handling.
4) Defects caused by natural disasters (e.g., earthquakes, floods, fires).
5) Defects from not following specifications, usage instructions, or related documents on the website or catalog.
6) Defects caused by customer’s modification, repair, or disassembly.
7) Defects caused by other equipment.
8) Defects from use outside purchased Misumi Subsidiary and the areas it handles.
9) Defects due to inexperience or use beyond intended purpose or method.
10) Defects caused by customer violating usage rules or contracts.
11) Defects discovered or occurring after resale to third parties.
12) Other cases where repair or replacement are not accepted as stated on the website or catalog.

The warranty period for this product is one year from the date of shipment by the Company.
Minor scratches, stains, dents, or discoloration that do not affect use are not considered defects. However, if these are deemed severe by the Company, they will be treated as defects.
Customers must verify the product name, model, quantity, and condition within one week of receipt, and check against specifications on the website or catalog. Any defects must be reported in writing to MISUMI Customer Service within this period. If no notification is received, the product is considered accepted and free of defects.
Repairs or replacements after the warranty period or outside the warranty scope will be charged.
Depending on the product’s nature, production date, or specifications, repairs or replacements may not be possible
Disclaimer
Except as required by usage rules or product quality laws, the Company is not liable for any damages, losses, or costs caused by product defects, including defects in products made with it, recalls, or production stoppages.
If the customer violates usage precautions, they lose all rights to compensation from the Company.
Compensation for damages caused by product defects is limited to the purchase price of the damaged product.
Orders will not be accepted without the customers’ agreement to this limit.
If the Company is not the manufacturer as defined by product quality laws, the customer may seek liability directly from the actual manufacturer.
For damages caused by or related to the following reasons, the customer has no right to claim any compensation or reimbursement from the Company:

1) Damages caused by using defective products or resulting production line stoppages.
2) Damages caused by violating usage rules, product catalogs, or warranty terms.
3) Damages resulting from the customer’s intentional or negligent actions.
4) Damages caused by force majeure events beyond control.
5) Damages arising from intellectual property disputes related to product use.
6) Damages caused by export delays or prohibitions due to laws or regulations.
7) Losses resulting from defects found after the product are resold to third parties.

Precautions
Repairs or replacements must be made by returning the product; no on-site service.
Product discontinuation may prevent replacement with the same item.
The Company may update warranty terms; continued orders mean acceptance.

Chapter 1 Overview

1.1 Product Introduction

AC servo technology has matured since its development in the early 1990s, with continuously improving performance. It is now widely used in automation fields such as CNC machine tools, printing and packaging machines, textile machinery, and automated production lines.
The E-DHAS□□P series covers a power range from 100W to 1000W and supports Modbus communication protocol, enabling multiple servo drivers to be networked via RS485 bus. This series features the latest auto-tuning functions, including rigidity settings, inertia identification, and vibration suppression, making operation and adjustment easy.
Paired with the E-MAS□2 series high-response servo motors (equipped with a 23-bit multi-turn absolute encoder), the system runs smoothly and reliably. It also supports full-closed loop control, internal single-axis control (PR), and advanced follow-up functions, offering rich functionality.

Key advantages of E-DHAS□□P series:

- Wide speed range and constant torque:
- Speed ratio up to 1:5000, with stable torque from low to high speed.
- High speed and precision:
- Max motor speed up to 7000 rpm; supports 26-bit multi-turn absolute encoders.
- Simple and flexible control:
- Operating modes and performance can be adjusted via parameters to suit different needs.

Note
Maximum speed varies by motor model

1.2 Incoming Inspection

Upon receipt, the following inspections must be performed:

- The packaging box is intact, and the goods are not damaged during transportation.
- Verify the nameplates on the servo driver and servo motor to ensure the received goods match the order.
- Check the packing list to confirm all accessories are included.

Note:

- Do not install any servo system that is damaged or has missing parts.
- The servo driver must be used with a servo motor matching specifications.
- If you have any questions after receiving the goods, please contact the supplier or our company.

List of Accessories

Driver Model	Accessory Name	Part number	Qty
100W~1kW	9-PIN Main Power Connector (X1 terminal) + Insertion Tool	11601072	1
	4-PIN Motor Power Connector (X2 terminal)	11601070	1
	2-PIN Brake Connector (X3 terminal)	11601071	1
	SCSI 50-PIN Connector (CN1 terminal)	11601054	1
	STO Connector (CN6 terminal)	94500580	1
	1394 6-PIN Connector (CN2 terminal)	11600961	1
	1394 10-PIN Connector (Full-featured version)	11601056	1

Note: The debugging software for the E-DHAS□□P series must be obtained separately by contacting Misumi or downloading it from the official MISUMI website.

1.3 Model Number Structure


1.3.1 Servo Driver

E-DHAS 01 P - F □

① ② ③ ④ ⑤

① **Product Series** E-DHAS: High-end AC Servo driver	② **Power Rating (W)** 01：100W 04：400W 08：750W 10：1000W	③ **Product Type** P: Pulse Train + RS485 E: EtherCAT
④ **Design Version** F: Full-feature version		⑤ **Voltage Level (V)** Blank: 220V

Driver Label

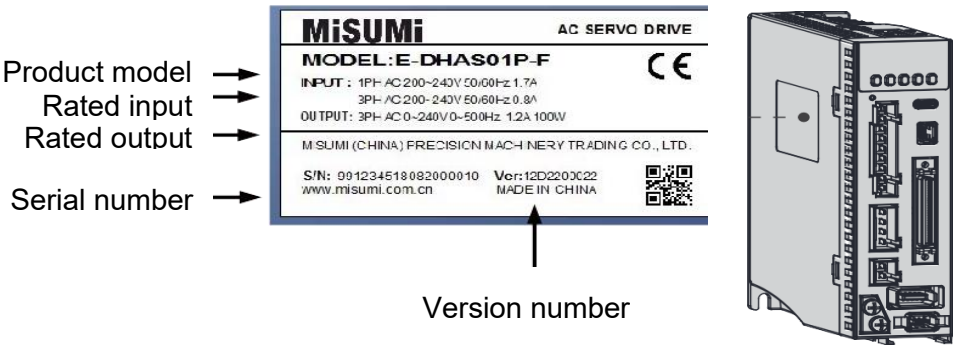

1.3.2 Servo Motor

E-MAS Series Servo Motor Model Identification

E-MAS H 2 - 04 01 □ B □

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Product Category E-MAS: MISUMI E-MAS series Servo Motor	④ Frame Size (mm) 04: 40mm 06: 60mm 08: 80mm	⑦ Brake Type Blank: No brake B: With brake
② Inertia Type S: Low Inertia H: High Inertia	⑤ Power Rating (W) 01：100W 02：200W 04：400W 08：750W 10：1000W	⑧ Connector Type Blank: Straight plug
③ Product Series 1: 23-bit magnetic encoder 2: 23-bit optical encoder	⑥ Voltage Level (V) Blank: 220V	


Servo Motor Nameplate Overview



1.4 Component Description

1.4.1 Servo Driver Ports And Connectors

E-DHAS01P~E-DHAS10P

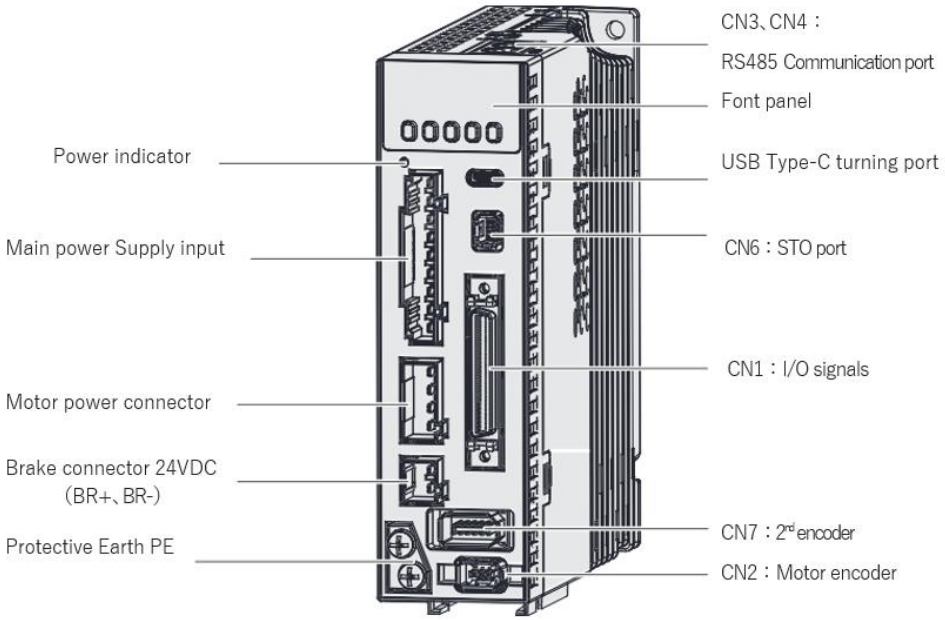

Parts & Connectors	Description
Front Panel	Including an LED display and 5 buttons. LED display is used to display servo driver status and parameter settings. 5 buttons： M ：To switch between different modes and parameters ◄ ：Switch between value ▲ ：Switch between sub-menus/Increase ▼ ：Switch between sub-menus/Decrease S : Enter
Type-C Data Port	Connect to computer for tuning of servo driver. Parameters of the servo driver can be modified without connecting to main power supply.
CN1 I/O signal	I/O signal connection terminals (SCSI-50PIN)
CN2 Motor encoder	Connect to motor encoder
CN3 CN4 RS485 Communication Port	Connect to controller with RS485 interface

Parts & Connectors	Description
CN6 STO (Safety Torque Off)	STO connecters. Used for any application requiring STO functions.
CN7 2nd encoder	Connect to external encoder (Supports ABZ incremental encoder only.)
Holding Brake 24VDC	BR+/BR- brake terminals
Power-on indicator light	Lights up when servo driver is connected to main power supply. Please do not touch the power terminal immediately after power off as the capacitor might require some time to discharge.
Main power supply 220VAC	**L1C, L2C**: Control circuit power supply (Single phase 220VAC) **L1, L2. L3**: Main power supply 220VAC Note: E-DHAS□□P series supports 1P/3P 220VAC main power supply **P+, B1, B2**: Connect B1 and B2 to use internal regenerative resistor; If an external regenerative resistor is needed, connect it to P+ and B2, disconnect B1 and B2.
Motor connectors	U, V, W Motor connector: Connect to U, V, W terminals on servo motor PE motor earth terminal: Connect to motor PE terminal
Protective Earth PE	Connect to PE of main power supply. For grounding

Note:


- All power levels of the E-DHAS□□P series drives have built-in regenerative braking resistors.
- To use an external regenerative resistor, short B1 and B2.
- If you intend to use an external resistor, remove the shorting jumper and connect the external resistor between P+ and B2.
- The thickness may vary across different power levels, but the components are the same.

1.4.2 Motor Ports and Connectors

Servo motor appearance and components description

Motor (40&60&80 Frame size)

Direct plug-in servo motor (40&60&80 Frame size)

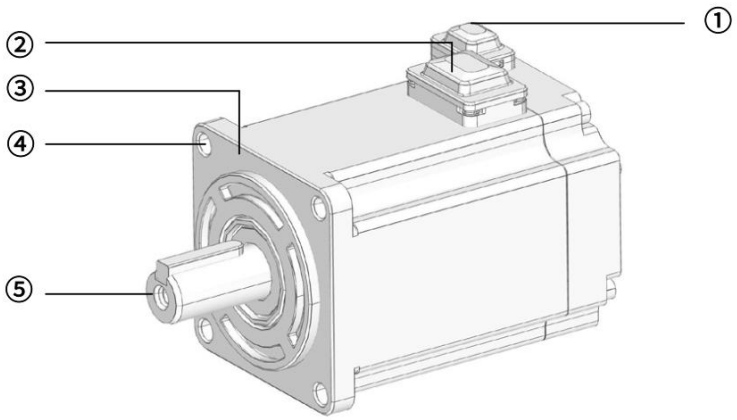

No.	Component Name
①	Encoder connector
②	Power connector
③	Motor flange
④	Mounting hole
⑤	Motor shaft

1.5 Servo Driver Technical Specifications

1.5.1 Electrical Parameters

E-DHAS□□P Drive Series		100	400	750	1000
Power Rating (W)		100	400	750	1000
Rated Current (A)		1.2	2.8	5.5	7.0
Peak Current (A)		4.8	9.3	16.9	21.0
Control circuit power supply		1-Phase AC 200V~240V, -10%~+10%, 50/60Hz			
Main power supply		1-Phase/ 3-Phase AC 200V~240V, -10%~+10%, 50/60Hz			
Regenerative resistor	Resistance (Ω)	100	100	100	100
	Power rating (W)	50	50	50	50
	Braking resistor function	The entire series has built-in regenerative braking resistors and also supports external braking resistors			
Cooling method		Air-cooled		Fan-cooled	
Dimension H*L*W(mm)		150*150*43		150*160*55	

1.5.2 General Specifications

Interface Configuration		
USB Type C		Modify or read driver parameters without main power supply
Low-speed pulse input		5V differential signal, 0-500kHz 24V differential signal, 0-200kHz
High-speed pulse input		5V differential signal, up to 4 MHz per channel, up to 8 MHz in quadrature mode
Crossover Frequency Output		Supports phase A/B/Z differential crossover frequency output Supports phase Z open collector crossover frequency output
Analog Input		3 analog inputs（AI1~AI3） Input range: -10V~+10V, Max. voltage: ±12V
Analog Output		2 analog outputs（AO1/AO2）, Output range: -10V~+10V
Digital Input		10 Digital Inputs DI1~DI10 (Supports common anode or cathode connection)
Digital Output		6 Digital output (2 single ended, 4 double-ended)
STO		Support (only supported by the full-featured version)
Secondary Encoder		Support (only supported by the full-featured version)
Brake Output		Built-in brake output function, no external relay required
Communication Interface		Support RS485 bus communication (RJ45 interface), based on Modbus communication protocol
Control Mode		
Control		1. External pulse train position control 2. JOG control 3. Closed loop position control 4. Velocity control 5. Torque control 6. Hybrid control: Position-Torque/Position-Velocity/Velocity-Torque
Position	Pulse frequency	500kHz /4MHz（5V differential input） 200kHz（24V single-ended input）
	Electronic gear ratio	1 ～ 8388608/1 ～ 8388608
	Torque limit	Please refer to parameter list
Control Features		
Drive Mode		IGBT SVPWM sinusoidal wave drive
Feedback Method		Encoder: RS485 Protocol
Standardized Parameters		Quick tuning of servo driver parameters through PC tuning tools.
Easy-to-use		One-click tuning, Single parameter tuning, Black box, Zero tracking control
Notch Filter		Mechanical resonance suppression. Supports up to 3 filters,50Hz~4000Hz
Vibration suppression		End vibration suppression
DI/DO settings		Digital inputs and outputs can be set accordingly
Alarm		Overcurrent. Overvoltage. Undervoltage. Overheat. Overload. Overtravel. Single-Phasing. Regenerative resistor error. Position deviation error. Encoder feedback error. Excessive braking rate. EEPROM error
Front Panel		5 push buttons, 8-segments display, 5 warning LEDs

Debugging Software	Using MISUMI EDrive debugging software, you can adjust current, position, and velocity loop parameters, modify I/O signal levels and motor settings, import/export parameters, and monitor speed and position error waveforms during trapezoidal wave tests.
Communication	Supports USB: Based on the Modbus protocol (USB 2.0), it can connect to a computer for parameter setting and status monitoring.
	E-DHAS□□P Support RJ45. Communication up to 32 axes to a host
Dynamic Brake	Internal dynamic brake。
Position Comparison	42 position comparison outputs
Black Box Functionality	Supports black box functionality, capturing data before and after preset conditions. Data can be read with MISUMI EDrive software for further analysis.
Applicable Load Inertia	30 times smaller than motor inertia
Input signal	
Basic Mode	10 Digital Inputs (Supports common anode or cathode connection) • Servo enabled (SRV-ON) • Clear Alarm (A-CLR) • Gain switching (GAIN) • Deviation counter clearing (CL) • Control mode switching (C-MODE) • Torque limit switching (TL-SEL) • Vibration suppression 1 (VS-SEL1) • Vibration suppression 2 (VS-SEL2) • Command prohibition (INH) • Internal command velocity 1 (INTSPD1) • Internal command velocity 2 (INTSPD2) • Internal command velocity 3 (INTSPD3) • Crossover frequency input (DIV1) • Positive limit switch (POT) • Negative limit switch (NOT) • Zero speed clamp (ZEROSPD) • Velocity sign (VC-SIGN) • Torque sign (TC-SIGN) • Emergency stop (E-Stop)
PR mode	Under PR mode: • Path trigger (CTRG) • Home switch (HOME) • Emergency stop trigger (STP) • Path 0-3 (ADD0-ADD3) • Positive JOG (PJOG) • Negative JOG(NJOG) • Positive limit switch (PL) • Negative limit switch (NL) • Origin (ORG)

Output signal	
Basic Mode	6 digital outputs (2 single-ended, 4 double-ended) • Assignable output signals: Servo ready (SRDY) • External brake off (BRK-OFF) • Positioning completed (INP1) • Velocity at arrival (AT-SPEED) • Zero speed position (ZSP) • Alarm (ALARM) • Velocity coincidence (V-COIN) • Position command (P-CMD) • Velocity limit (V-LIMIT) • Velocity command (V-CMD) • Servo enabled (SRV-ST) • Positive limit switch (POT-OUT) • Negative limit switch (NOT-OUT)
PR mode	Under PR mode • Command completed (CMD-OK) • Path completed (PR-OK) • Homing done (HOME-OK)

Note:

- Please install the servo driver within this range of ambient temperature.
- When storing it in an electrical cabinet, the temperature inside the cabinet should not exceed this value.


1.6 Motor General Specifications

1.6.1 Mechanical Characteristic Specifications


Item		Description
Duty Cycle		Continuous
Vibration Class		V15
Insulation Resistance		DC500V, over 100 MΩ
Excitation Method		Permanent Magnet
Mounting Method		Flange Type
Thermal Class		Class F
Insulation Voltage		AC1500V for 1 minute
Enclosure Protection		IP67 (excluding shaft end and cable outlet)
Rotation Direction		CCW (counterclockwise) when viewed from the load side under forward command
Environmental Conditions	Temperature	0℃ ~40℃（No Freezing）
	Humidity	20%~80%（No condensation）
	Installation Location	• Indoor, free from corrosive or explosive gases • Well-ventilated, minimal dust, debris, or humidity • Easy to inspect and clean • Operate normally below 1000m; derate above 1000m • Free from strong magnetic fields • Away from heat sources such as furnaces • For environments with grinding fluid, oil mist, iron dust, or cutting debris, select models with oil seal
	Storage Environment	When storing the motor unpowered, comply with the following: • Storage temperature: -20°C ~ +60°C (non-freezing) • Storage humidity: 20% ~ 80% RH (non-condensing)
Shock Resistance [1]	Shock acceleration (measured at flange face):	$490 m/s^2$
Vibration Resistance [2]	Vibration acceleration (measured at flange face)	$49 m/s^2$

Note

- [1] Shock resistance applies in the vertical direction when the motor is mounted horizontally.
- [2] Vibration resistance applies in all three directions (up/down, left/right, front/back) for horizontal mounting.
- Actual vibration levels vary by application; verify with real-world use.

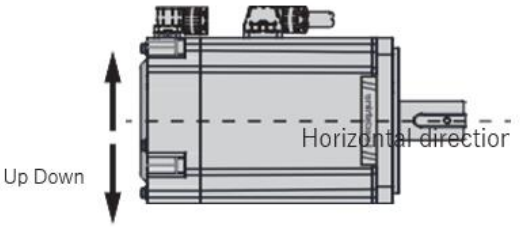

Shock

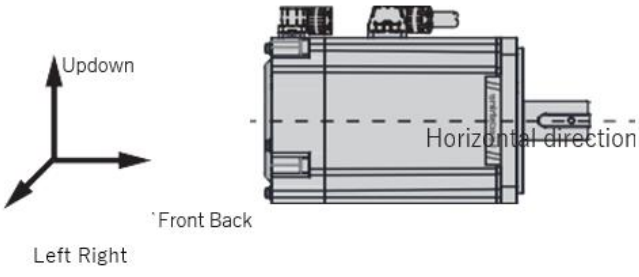

Vibration

1.6.2 Electrical Specifications of Motor's Brake

Motor Model	Holding Torque (N·m)	Supply Voltage (VDC)±10 %	Closing Voltage (V)	Release Voltage (V)	Release Time (ms)	Closing time (ms)	Rotary clearance (°)
E-MASH2-0401B	≥ 0.4	24	≤ 16	≥ 1	≤ 20	≤ 40	＜ 1.5
E-MASH2-0602B	≥ 1.5		≤ 16	≥ 1	≤ 20	≤ 50	≤ 1
E-MASH2-0604B	≥ 1.5		≤ 16	≥ 1	≤ 20	≤ 50	≤ 1
E-MASH2-0808B	≥ 3.2		≤ 16	≥ 1	≤ 40	≤ 60	≤ 1
E-MASH2-0810B	≥ 3.2		≤ 16	≥ 1	≤ 40	≤ 60	≤ 1

1.6.3 Load Moment of Inertia

Load inertia is the inertia of the load. Larger load inertia reduces responsiveness and may cause instability. Servo motors have limits on allowable load inertia, which vary by drive conditions.
Exceeding this limit can trigger an overvoltage alarm during deceleration or an overload alarm if the servo has a built-in braking resistor.
If alarms occur, take appropriate corrective actions:

- Reduce the torque limit.
- Decrease the deceleration rate.
- Lower the maximum speed.

If alarms persist after these measures, use an external braking resistor.
⚠Caution
Even when using a built-in braking resistor, under certain regenerative drive conditions, the generated energy may exceed the allowable dissipation capacity (W) of the built-in resistor. In such cases, an external braking resistor is required.


1.7 Motor Specifications

Motor Model	Power (W)	Rated torque (N·m)	Rated speed (rpm)	Maximum speed (rpm)	Moment of inertia ($kgm^2 \times 10^{-4}$)	Voltage (V)
E-MASH2-0401	100	0.32	3000	6500	0.062	220
E-MASH2-0401B (With Brake)					0.072	
E-MASH2-0602	200	0.64			0.28	
E-MASH2-0602B (With Brake)					0.3	
E-MASH2-0604	400	1.27			0.56	
E-MASH2-0604B (With Brake)					0.58	
E-MASH2-0808	750	2.39			1.5	
E-MASH2-0808B (With Brake)					1.65	
E-MASH2-0810	1	3.18			2	
E-MASH2-0810B (With Brake)					2.15	

E-MASH2-0401(B)

Motor Specifications		
Frame size(mm)	40	
Inertia	High inertia	
Rated power (kW)	0.1	
Rated voltage (V)	220	
Rated torque (N·m)	0.32	
Maximum torque (N·m)	1.11	
Rated current (A)	0.92	
Maximum current (A)	3.36	
Rated speed (rpm)	3000	
Maximum speed (rpm)	6500	
Torque coefficient	0.383	
(Nm/A (rms))	Without brake	0.062
	With brake	0.072

Torque-speed characteristics

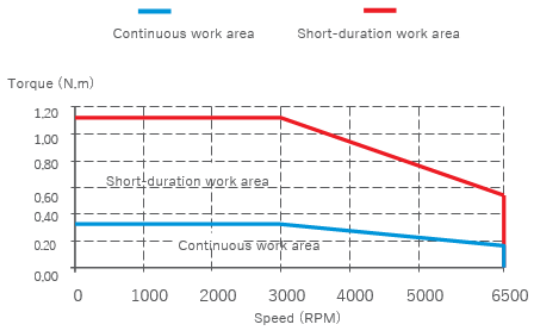

Brake specifications

Holding Torque (N·m)	Supply Voltage (VDC)	Rated Power (W)	Excitation current (A)	Release Time (ms)	Closing time (ms)	Rotary clearance (°)
＞ 0.4	24	6.9	0.25	≤ 40	≤ 20	＜ 1.5°


Allowable load

Shaft length (mm)	Radial allowable load (N)	Axial allowable load (N)
25	78	54

E-MASH2-0602(B)

Motor Specifications		
Frame size(mm)	60	
Inertia	High inertia	
Rated power (kW)	0.2	
Rated voltage (V)	220	
Rated torque (N·m)	0.64	
Maximum torque (N·m)	2.23	
Rated current (A)	1.5	
Maximum current (A)	5.4	
Rated speed (rpm)	3000	
Maximum speed (rpm)	6500	
Torque coefficient	0.447	
(Nm/A (rms))	Without brake	0.28
	With brake	0.30

Torque-speed characteristics

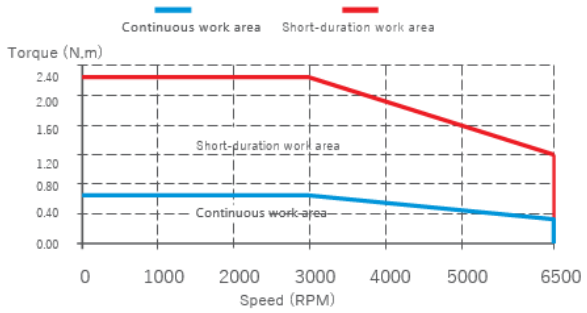

Brake specifications

Holding Torque (N·m)	Supply Voltage (VDC)	Rated Power (W)	Excitation current (A)	Release Time (ms)	Closing time (ms)	Rotary clearance (°)
＞ 1.5	24	8.3	0.31	≤ 50	≤ 20	＜ 1°

Allowable load

Shaft length (mm)	Radial allowable load (N)	Axial allowable load (N)
30	245	74

E-MASH2-0604(B)

Motor Specifications		
Frame size(mm)	60	
Inertia	High inertia	
Rated power (kW)	0.4	
Rated voltage (V)	220	
Rated torque (N·m)	1.27	
Maximum torque (N·m)	4.46	
Rated current (A)	2.1	
Maximum current (A)	7.6	
Rated speed (rpm)	3000	
Maximum speed (rpm)	6500	
Torque coefficient	0.645	
(Nm/A (rms))	Without brake	0.56
	With brake	0.58

Torque-speed characteristics



Brake specifications

Holding Torque (N·m)	Supply Voltage (VDC)	Rated Power (W)	Excitation current (A)	Release Time (ms)	Closing time (ms)	Rotary clearance (°)
＞ 1.5	24	8.3	0.31	≤ 50	≤ 20	≤ ±1°


Allowable load

Shaft length (mm)	Radial allowable load (N)	Axial allowable load (N)
30	245	74

E-MASH2-0808(B)

Motor Specifications		
Frame size(mm)	80	
Inertia	High inertia	
Rated power (kW)	0.75	
Rated voltage (V)	220	
Rated torque (N·m)	2.39	
Maximum torque (N·m)	8.36	
Rated current (A)	4.1	
Maximum current (A)	15.4	
Rated speed (rpm)	3000	
Maximum speed (rpm)	6500	
Torque coefficient	0.645	
(Nm/A (rms))	Without brake	1.5
	With brake	1.65

Torque-speed characteristics

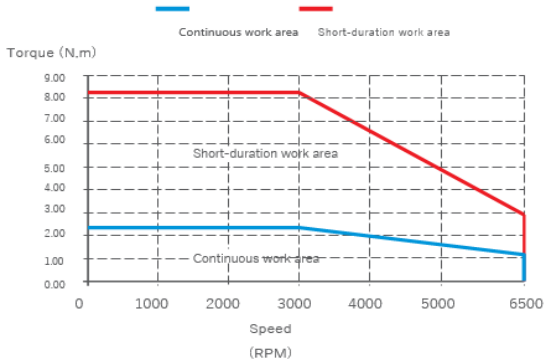


Brake specifications

Holding Torque (N·m)	Supply Voltage (VDC)	Rated Power (W)	Excitation current (A)	Release Time (ms)	Closing time (ms)	Rotary clearance (°)
＞ 3.2	24	11.5	0.48	≤ 60	＜ 40	<1°

Allowable load

Shaft length (mm)	Radial allowable load (N)	Axial allowable load (N)
35	392	147

E-MASH2-0810(B)

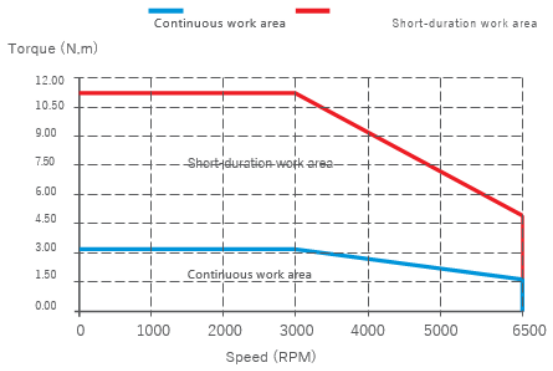Motor Specifications			Torque-speed characteristics
Frame size(mm)	80		
Inertia	High inertia		
Rated power (kW)	1		
Rated voltage (V)	220		
Rated torque (N·m)	3.18		
Maximum torque (N·m)	11.2		
Rated current (A)	5.7		
Maximum current (A)	21		
Rated speed (rpm)	3000		
Maximum speed (rpm)	6500		
Torque coefficient	0.634		
(Nm/A (rms))	Without brake	2	
	With brake	2.13	

■ Brake specifications


Holding Torque (N·m)	Supply Voltage (VDC)	Rated Power (W)	Excitation current (A)	Release Time (ms)	Closing time (ms)	Rotary clearance (°)
>3.2	24	11.5	0.48	≤ 60	≤ 40	＜ 1

■ Allowable load

Shaft length (mm)	Radial allowable load (N)	Axial allowable load (N)
35	392	147

Chapter 2 Quick Start Guide

2.1 Commissioning Workflow

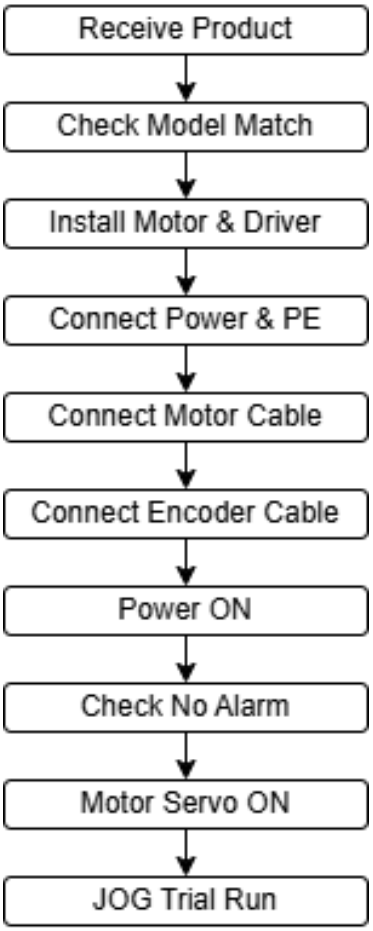

2.2 Unpacking Checklist

Check	Status
Driver model matches order	□
Motor model matches order	□
No physical damage	□
Connectors included	□
Motor and driver are matched pair	□

2.3 Installation Checklist

Driver:


☐ Installed vertically
☐ Ventilation space available
☐ Cabinet temperature below specification
☐ PE grounded

Motor:

☐ Securely mounted
☐ Flexible coupling used
☐ Shaft not overloaded

2.4 Wiring Checklist

Minimum wiring that needs to perform trial run as below:

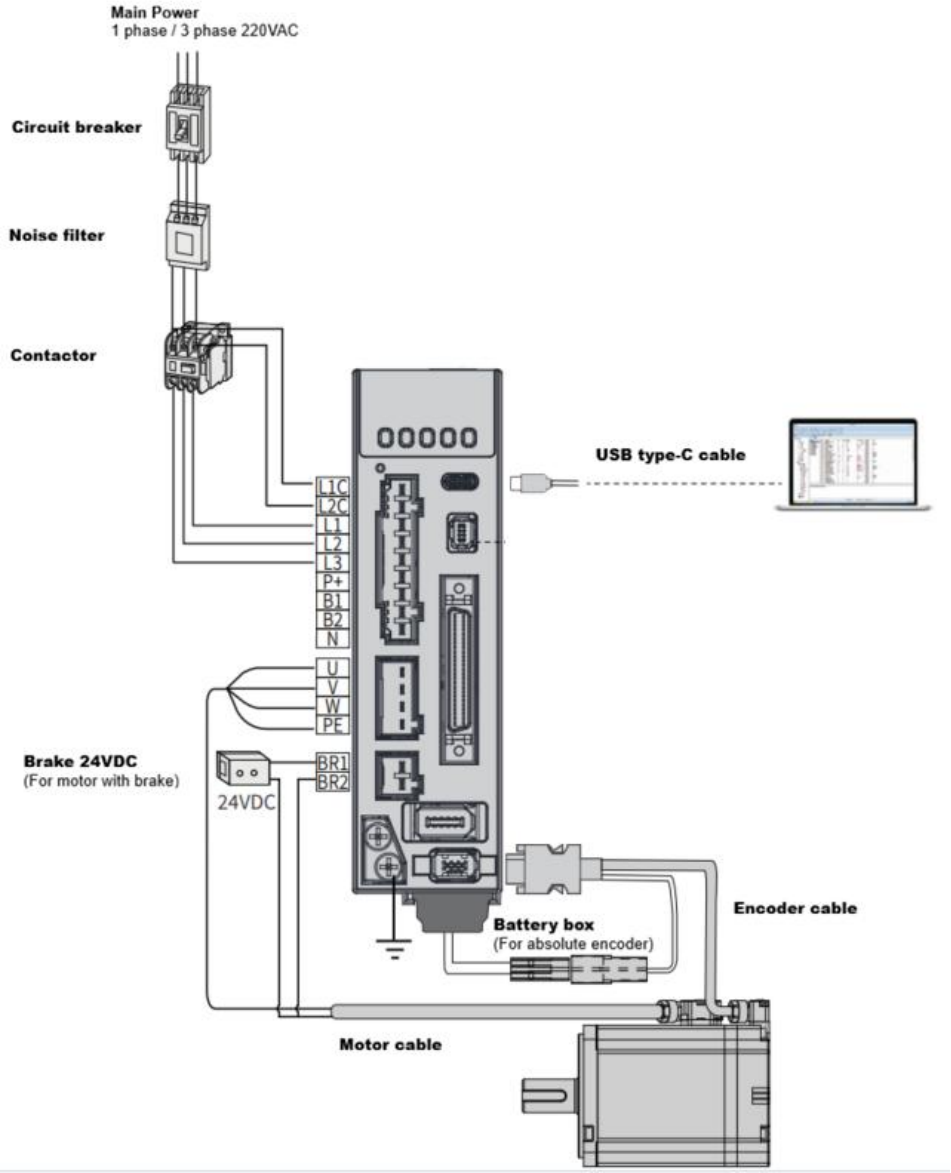

☐ AC Power (L1/L2/L3)
☐ Control Power (L1C/L2C)
☐ PE Ground
☐ Motor U/V/W Cable
☐ Encoder Cable
☐ USB cable to PC
☐ Brake wiring (if brake motor)
☐ Battery box wiring (if absolute encoder)

Note: For first trial run, external controller wiring is not required.

2.5 First Power-On


Apply control power and main power.
Expected:

- 'Charge' LED ON
- Front panel active
- No alarm displayed


2.6 Servo ON and Trial Run

The EDrive software can be downloaded from the link below:
https://sg.misumi-ec.com/linked/material/mech/MSM1/CAD/3D/10311229039/E-DHAS.zip

After unzip or pull the 'EDriver_v1.2.0_alpha' folder to the desktop, double click 'EDrive.exe' to open the software.

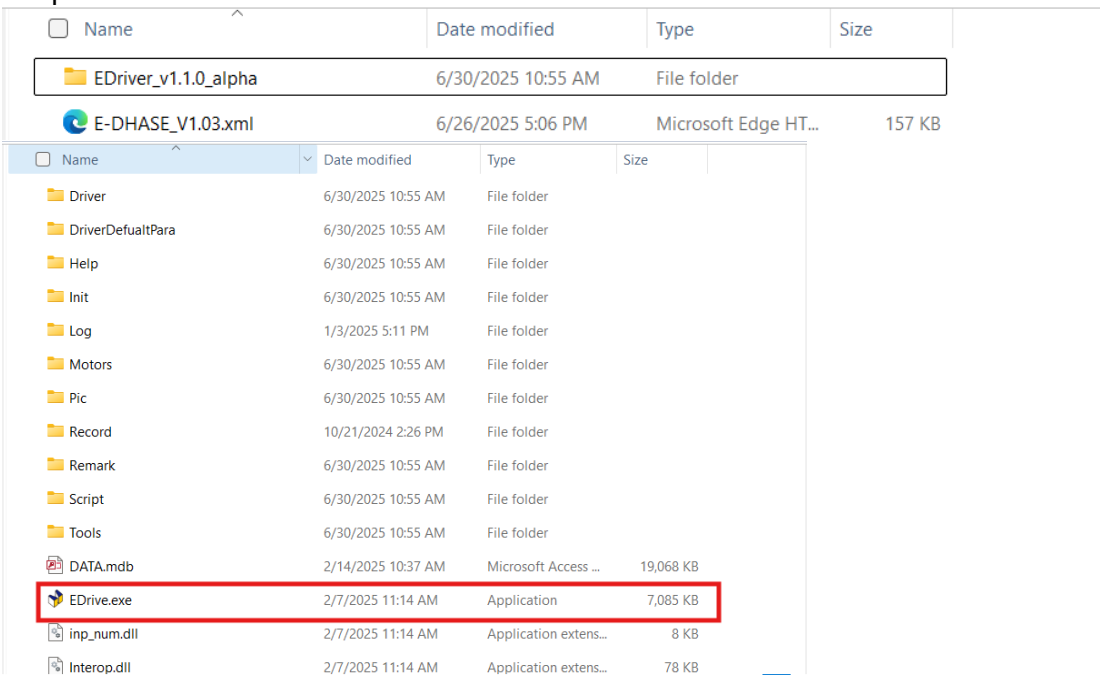


After software opened, go to 'General' and change language to 'English'.

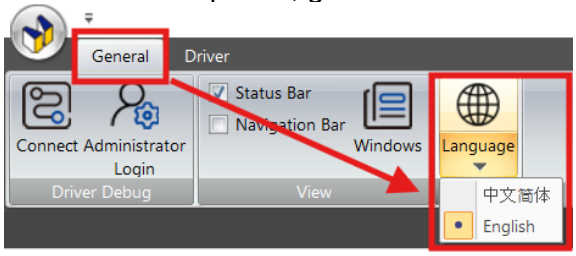


Please use cable with one side USB type-A and the other side USB type-C.




Open EDrive software and start connection. ‘Communication Mode’ please choose ‘RS232’, then click ‘Refresh’, then click ‘Connect’.

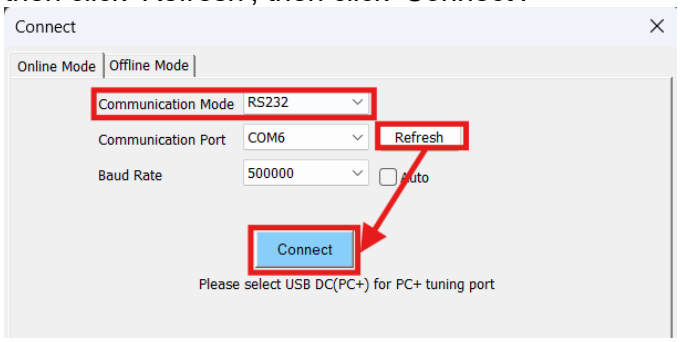

Click ‘Trial Run’.

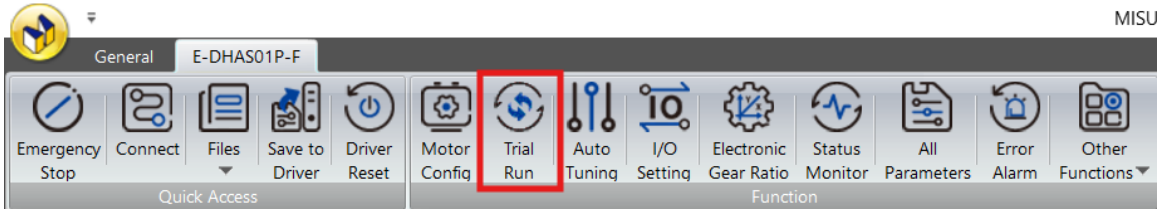

Click (2) ‘Servo Enable’, then click (3) ‘Forward’ or (4) ‘Reverse’, to move the motor.

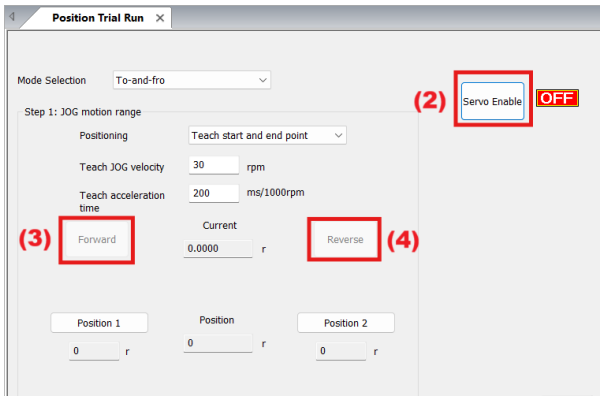

2.7 Commissioning Completion Checklist

☐ Driver power ON normally
☐ No alarm present
☐ Servo ON successful
☐ Forward rotation verified
☐ Reverse rotation verified
☐ Brake function verified

2.8 Troubleshooting Quick Check

Symptom	**Check**
No display	Control power wiring
Alarm after power ON	Encoder / motor cable
Servo ON impossible	DI assignment / SRV-ON
Motor vibrates	U/V/W wiring
Wrong direction	Motor direction parameter
Brake not releasing	BR+/BR− wiring

Chapter 3 Installation

3.1 Servo driver Installation

3.1.1 Installation Site

- Install the drive indoors, inside a control cabinet that is protected from rain and direct sunlight. Do not place flammable materials nearby. This product is not waterproof.
- Do not use this product in environments containing corrosive gases such as hydrogen sulfide, sulfur dioxide, chlorine, ammonia, chlorinated gases, acids, alkalis, or salts, nor near flammable gases or combustible materials.
- Avoid installing in areas with high temperature, humidity, dust, or metal particles.
- Install in a location with minimal vibration.
- Preferably install in a well-ventilated, dry, and dust-free environment. Prevent oil, metal dust, water, or other foreign substances from entering the product.

3.1.2 Installation Environment


Item	Condition
Temperature	Storage: -20-80℃ (Condensation free); Not more than 72 hours if stored in over 65℃ Installation: 0~+55℃ (Not frozen); Lower performance at over 45℃
Humidity	Under 90%RH (Condensation free)
Altitude	Max. altitude of 2000m. 100% performance at 1000m or below. Performance decreases by 1% with every increase of 100m from 1000m.
Vibration	Less than 0.5G (4.9m/s2) 10-60Hz (non-continuous working)
IP ratings	IP20

Note:

- Operating temperature: 0 to +60 °C. Derating is required when operating above 40 °C.
- When temperature decreases and humidity increases, condensation is likely to occur.
- If storage temperature exceeds +60 °C, do not store continuously at this temperature for more than 72 hours


3.1.3 Servo Driver Dimension

Size 1：E-DHAS01P、E-DHAS04P

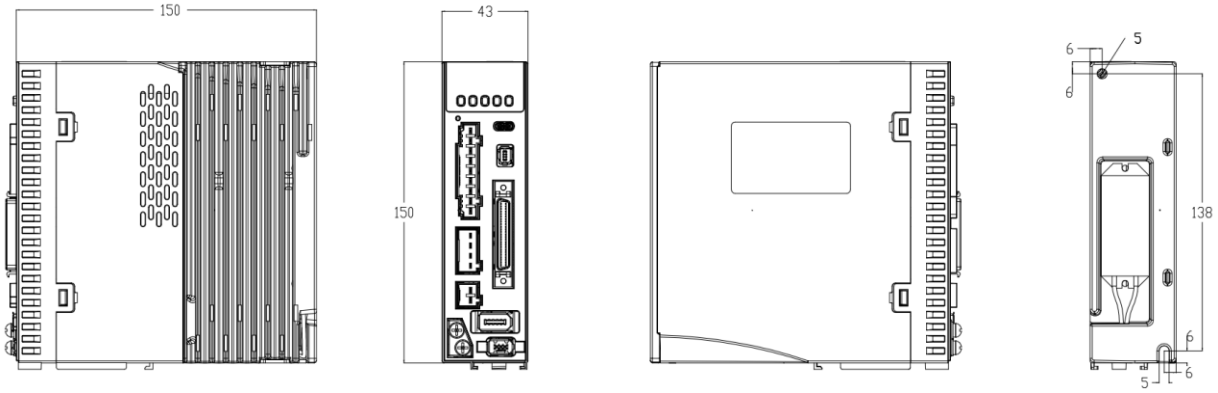

150mm x 150mm x 43mm

Size 2：E-DHAS08P、E-DHAS10P

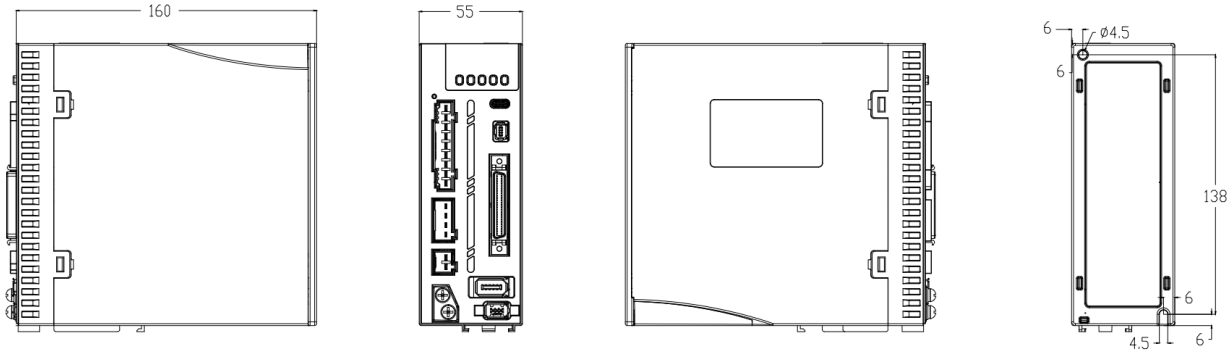


150mm x 160mm x 55mm

3.1.4 Space requirement for installation

In order to ensure efficient heat dissipation, please leave at least 10mm installation space in between drivers. If drivers need to be mounted compactly, please leave at 1mm of installation space. Please keep in mind that under such conditions, the drivers can only run at 75% of actual load rate.

Air flow out

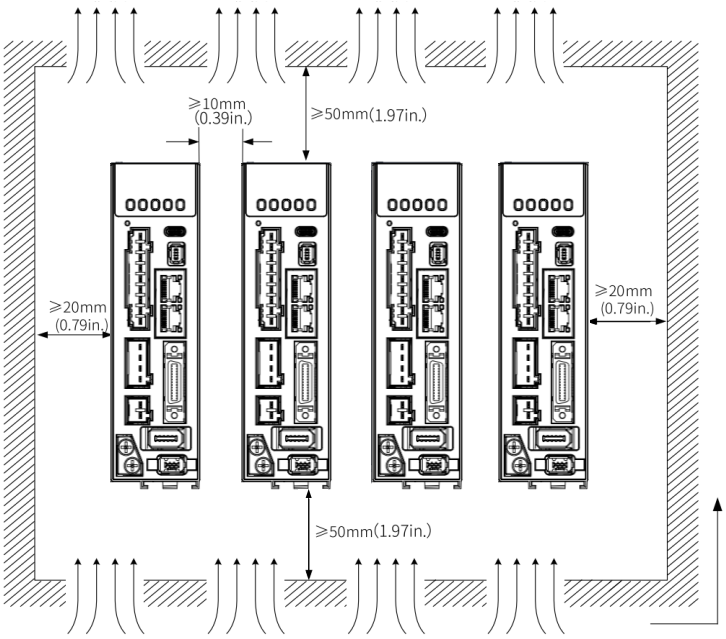

Air flow in

Installation method
Please install the driver vertically to ground facing forward for better heat dissipation. Always install in rows and use heat insulation board to separate between rows. Cooling fans are recommended for drivers to achieve optimal performance.
Grounding
PE terminals must be grounded to prevent electrocution hazard or electromagnetic interference.
Wiring
Please ensure there is no liquid around the wiring and connectors as liquid leakage may cause serious damage to the driver(s).
RJ45 port cover
Please cover unconnected RJ45 port(s) on top of the driver to prevent dust or liquid from damaging the ports.
Battery kit
If there is a need for battery kit, please remember to leave a room in the electrical cabinet for it.

3.2 Servo Motor Installation

Please carefully read the precautions and installation methods in this chapter!

- Use a screw-type puller tool when installing or removing pulleys.
- Do not strike the motor shaft or encoder to avoid vibration or impact damage.
- Do not drag the motor by its shaft, cables, or encoder when handling.
- The motor shaft must not be subjected to excessive axial or radial loads, as this may cause damage.
- It is recommended to use a flexible coupling to connect the load.
- Ensure the motor is mounted securely with anti-loosening measures; use lock washers when fastening the motor.

3.2.1 Installation Location

- Installation conditions may affect the lifespan of a motor
- Please keep away from corrosive fluid and combustibles.
- If dusty working environment is unavoidable, please use motors with oil seal.
- Please keep away from heat source.
- If the motor is used in enclosed environment without heat dissipation, motor lifespan will be short.
- Please check and clean the installation spot before installation.

3.2.2 Installation Environment


Item	Condition
Operating Temperature	0°C to +40°C (up to +60°C with derating; non-freezing)
Operating Humidity	Below 90% RH (no condensation or icing)
Storage Temperature	-20°C to +60°C (max 85°C for up to 72 hours)
Storage Humidity	Below 90% RH (no condensation or icing)
Atmosphere	Indoor (no direct sunlight), free of corrosive or flammable gases
Altitude	Below 1000m for normal use; derating required above 1000m (up to 2000m)
Vibration Grade	Less than 5G (49 m/s²)
Shock Resistance	Less than 50G (490 m/s²)
Protection Rating	IP65 (E-MASH2 series motors up to IP67)

Note:

- Operating temperature: 0 to +60 °C. Derating is required when operating above 40 °C.
- When temperature decreases and humidity increases, condensation is likely to occur.
- If storage temperature exceeds +60 °C, do not store continuously at this temperature for more than 72 hours.

3.2.3 Motor Dimensions

E-MASH2 40 Motor Frame (Unit: mm)

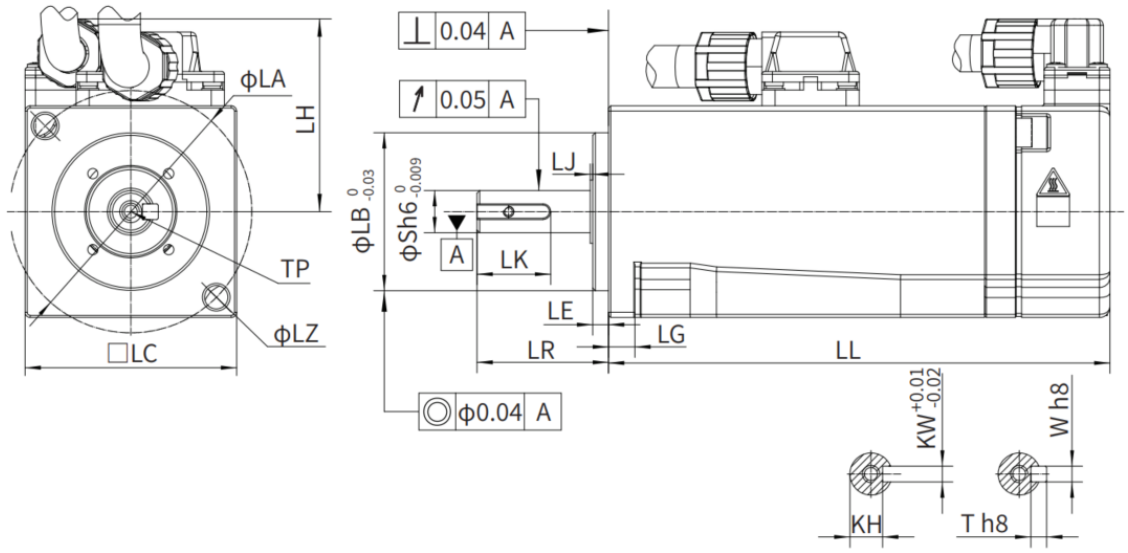


Shaft End Shaft End with Key

The above diagrams are for reference only. Please refer to the actual dimensions for installation.

Motor Model	LL	LC	LR	LA	LZ	LH	LG	LE	LJ	S	LB	TP	LK	KH	KW	W	T	Weight (kg)
E-MASH2-0401	67.7	40	25	46	4.5	38MAX	5	3	3	8	30	M3X8	14	6.2	3	3	3	0.46
E-MASH2-0401B	95	40	25	46	4.5	38MAX	5	3	3	8	30	M3X8	14	6.2	3	3	3	0.68

Note: In the motor model, “B” indicates a brake-equipped motor.

E-MASH2 60/80 Motor Frame (Unit: mm)

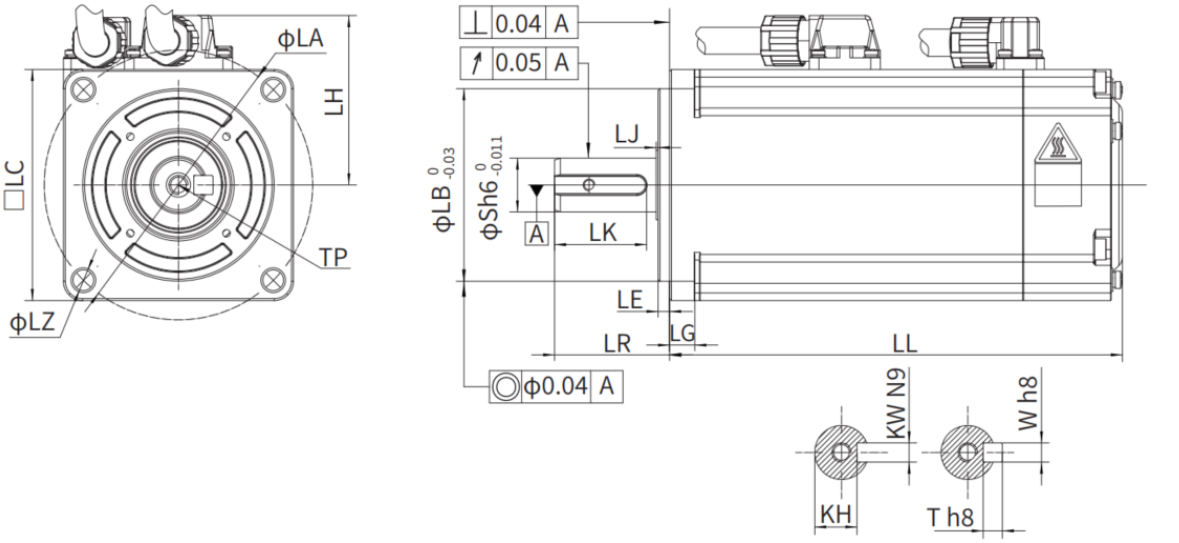

Shaft End Shaft End with Key

The above diagrams are for reference only. Please refer to the actual dimensions for installation.

Motor Model	LL	LC	LR	LA	LZ	LH	LG	LE	LJ	S	LB	TP	LK	KH	KW	W	T	Weight (kg)
E-MASH2-0602	71.8	60	30	70	5.5	37.5MAX	6.6	3	3	14	50	M5X12	22.5	11	5	5	5	0.9
E-MASH2-0602B	101.1	60	30	70	5.5	37.5MAX	6.6	3	3	14	50	M5X12	22.5	11	5	5	5	1.3
E-MASH2-0604	88.8	60	30	70	5.5	37.5MAX	6.6	3	3	14	50	M5X12	22.5	11	5	5	5	1.3
E-MASH2-0604B	118.1	60	30	70	5.5	37.5MAX	6.6	3	3	14	50	M5X12	22.5	11	5	5	5	1.55
E-MASH2-0808	90.9	80	35	90	6.5	57.5MAX	8.1	3	3	19	70	M5X15	25	15.5	6	6	6	2.12
E-MASH2-0808B	121.9	80	35	90	6.5	57.5MAX	8.1	3	3	19	70	M5X15	25	15.5	6	6	6	2.7
E-MASH2-0810	103.9	80	35	90	6.5	57.5MAX	8.1	3	3	19	70	M5X15	25	15.5	6	6	6	2.7
E-MASH2-0810B	134.9	80	35	90	6.5	57.5MAX	8.1	3	3	19	70	M5X15	25	15.5	6	6	6	3.2

Note: In the motor model, “B” indicates a brake-equipped motor.

3.2.4 Installation Method and Precautions


Installation Method

The motor can be installed vertically or horizontally, but the following requirements must be observed:

- Horizontal Installation
- Position the cable outlet facing downward to prevent oil or water from entering the motor.
- Vertical Installation
- When installing a motor with a reducer in the axial direction, use a motor with an oil seal to prevent reducer oil from leaking into the motor.

Oil- and waterproofing


- Do not submerge motor/cable under oil/water
- Please use a motor with oil seal when paired with a reducer to prevent reducer oil from leaking into the motor.

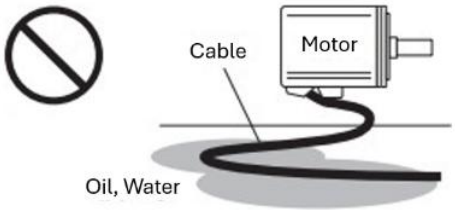

Conditions for use of servo motors with oil seals:
— Make sure the oil level is below the lip of the oil seal during use.
— When installing the servo motor vertically upward, do not allow oil to enter the lip of the oil seal.

- When using in places with water dripping, please use it after confirming the protection level of the servo motor.
- In applications with liquid, please install the motor with the wiring port facing downward
- Do not use in an environment where oil and water often splash onto the motor body.

(As shown below), prevent liquid from flowing along the cable to the motor body.

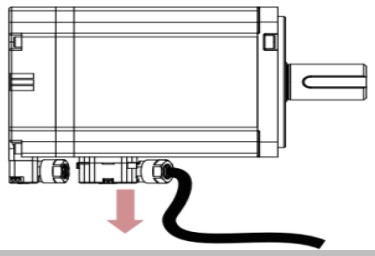

Cable stress

- Do not bend the cable, especially at each ends of the connectors.
- Make sure not to let the cables be too tight and under tremendous stress especially thinner cables such as signal cables

Connectors

- Please remove any conductive foreign objects from the connectors before installation
- The connectors are made of resin. May not withstand impact.
- Please hold the driver during transportation, not the cables.
- Leave enough “bend” on the connector cables to ensure less stress upon installation.

Encoder & coupling

- During installation or removal of coupling, please do not hit the motor shaft with a hammer as it would cause damage to internal encoder.
- Please make sure to centralize the motor shaft and coupling, it might cause damage to motor or encoder due to vibration.
- Please make sure axial and radial load is within the limits specified as it might affect the lifespan of the motor or cause damage to it.

Motor brake cable connection precautions

- For motors with a brake and a magnetic encoder, brake wiring must respect polarity to avoid interference that can cause alarms, accuracy loss, or vibrations. For motors with a photoelectric encoder, polarity in brake wiring doesn’t matter

3.3 Peripheral Devices

Peripheral Device Overview Table

Component Type	Component Name	Installation Location	Compatible Models	Function Description
Peripheral Electronic Components	Fuse & Circuit Breaker	Driver input side	All models	Required for compliance with EN 61800-5-1 and UL61800-5-1 standards. Must be installed on the input side to prevent accidents caused by internal circuit short circuits.
	AC Input Reactor	Driver input side		Reduces high-frequency harmonics and improves power factor.
	EMC Filter	Driver input side		Reduces conducted and radiated interference from the driver.
	Magnetic Ring / Clamp	Driver output side		Reduces external interference and bearing current.
		Signal Cable		Enhances signal anti-interference performance.

3.3.1 Fuses

To prevent accidents due to short circuits, fuses must be installed on the input side.

Servo driver Model	Rated Input Current	Recommended Fuse		
		Manufacturer	Rated Current (A)	Model
Single phase 220V				
E-DHAS01P	1.7	Bussmann	15 A	FWP-15B
E-DHAS04P	4		20 A	FWP-20B
E-DHAS08P	7.9		35 A	FWP-35C
E-DHAS10P	8.8		40 A	FWP-40C

3.3.2 Electromagnetic Contactors

Servo driver Model	Rated Input Current	Recommended Contactor		
		Manufacturer	Rated Current (A)	Model
Single phase 220V				
E-DHAS01P	1.7	Schneider	9	LC1 D09
E-DHAS04P	4		9	LC1 D09
E-DHAS08P	7.9		9	LC1 D09
E-DHAS10P	8.8		12	LC1 D12

3.3.3 Circuit Breakers

Servo driver Model	Rated Input Current	Recommended Breaker		
		Manufacturer	Rated Current (A)	Model
Single phase 220V				
E-DHAS01P	1.7	Schneider	4	OSMC32N2C4
E-DHAS04P	4		6	OSMC32N2C6
E-DHAS08P	7.9		16	OSMC32N2C16
E-DHAS10P	8.8		16	OSMC32N2C16

RCD (Residual Current Device) Selection Guidelines:

- Use Type B RCDs to handle DC leakage current generated by the driver.
- To avoid false triggering due to high-frequency leakage, use RCDs with ≥100 mA trip current per driver.
- For multiple drivers sharing one RCD, use RCDs with ≥300 mA trip current.

3.3.4 AC Input Reactor

Used to reduce harmonic content in input current. Optional accessory. Recommended for environments with strict harmonic requirements.

3.3.5 EMC Filter

To meet EN/IEC 61800-3 standards for radiated and conducted emissions, external EMC filters are required. Recommended Filters: Schaffner FN2090 and FN3258 Series. Please select according to the rated input current of this product and the following table:

Filter Model		Appearance
SCHAFFNER	FN2090 Series	
	FN3258 Series	

Servo driver Model	Rated Input Current (A)	Recommended Filter
Single phase 220V		
E-DHAS01E	1.7	FN 2090-3-06
E-DHAS04E	4	FN 2090-6-06
E-DHAS08E	7.9	FN 2090-8-06
E-DHAS10E	8.8	FN 2090-10-06

3.3.6 Magnetic Rings and Clamps


Install magnetic rings as close to the driver as possible on either the input or output side. Install at Input side can suppress noise in the power supply system. Install at Output side can reduce external interference and bearing current.
For leakage current and signal interference issues, use magnetic rings or clamps:

- Amorphous Magnetic Rings: High permeability below 1 MHz, excellent interference suppression, higher cost.
- Ferrite Clamps: Effective above 1 MHz, suitable for low-power servo drivers and signal lines, cost-effective and aesthetically pleasing.

Chapter 4 Wiring

4.1 E-DHAS□□P Wiring Diagram


E-DHAS□□P 220VAC Wiring Diagram

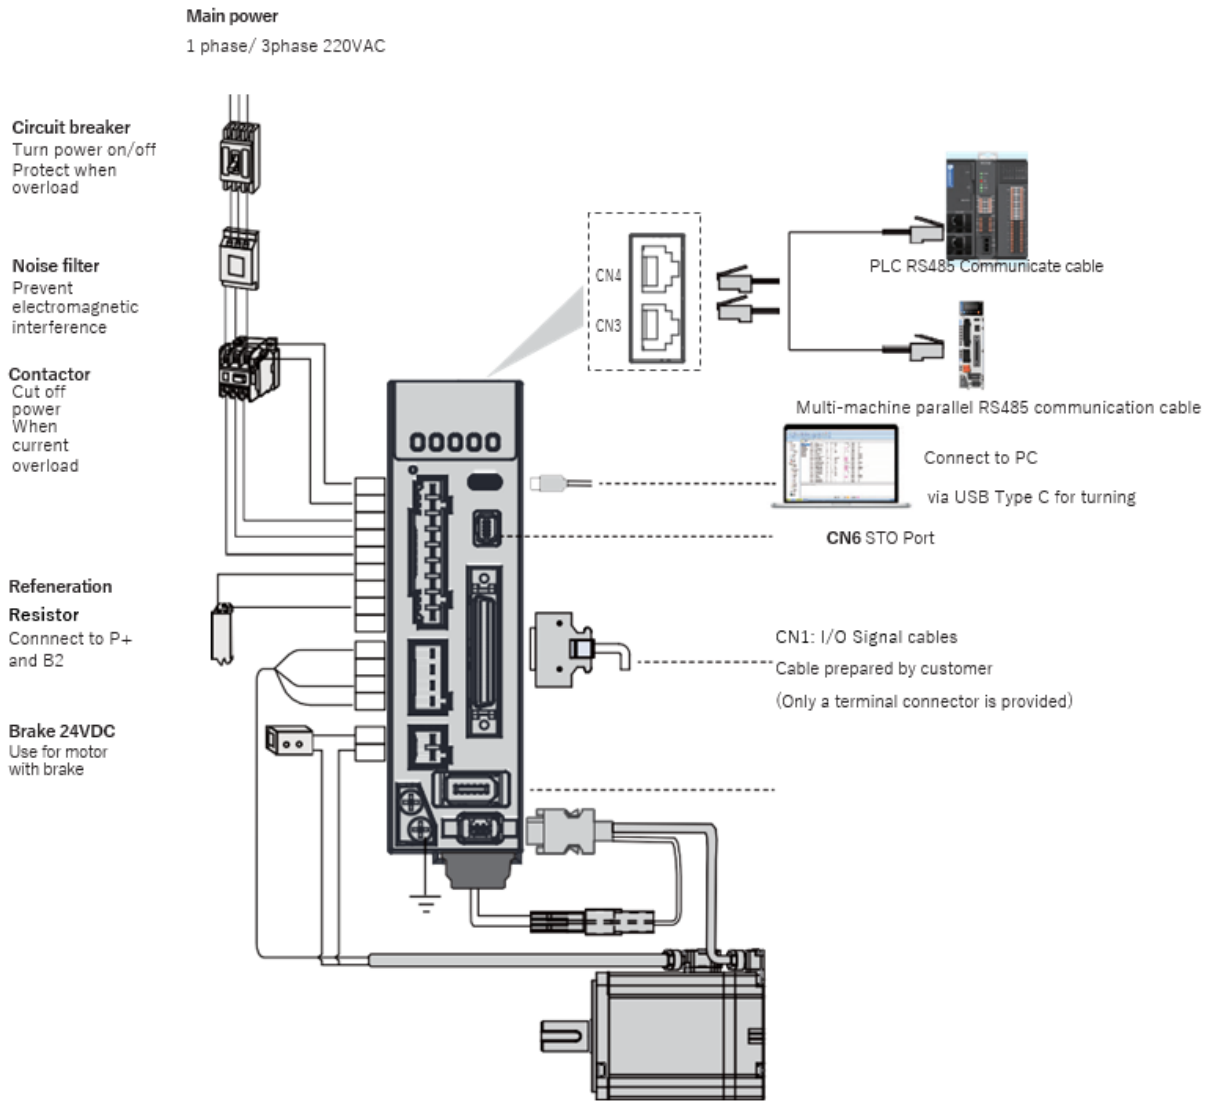

4.2 Electrical Wiring Diagram

4.2.1 Position Control Mode Wiring Diagram


Position control mode + Full closed loop control wiring diagram

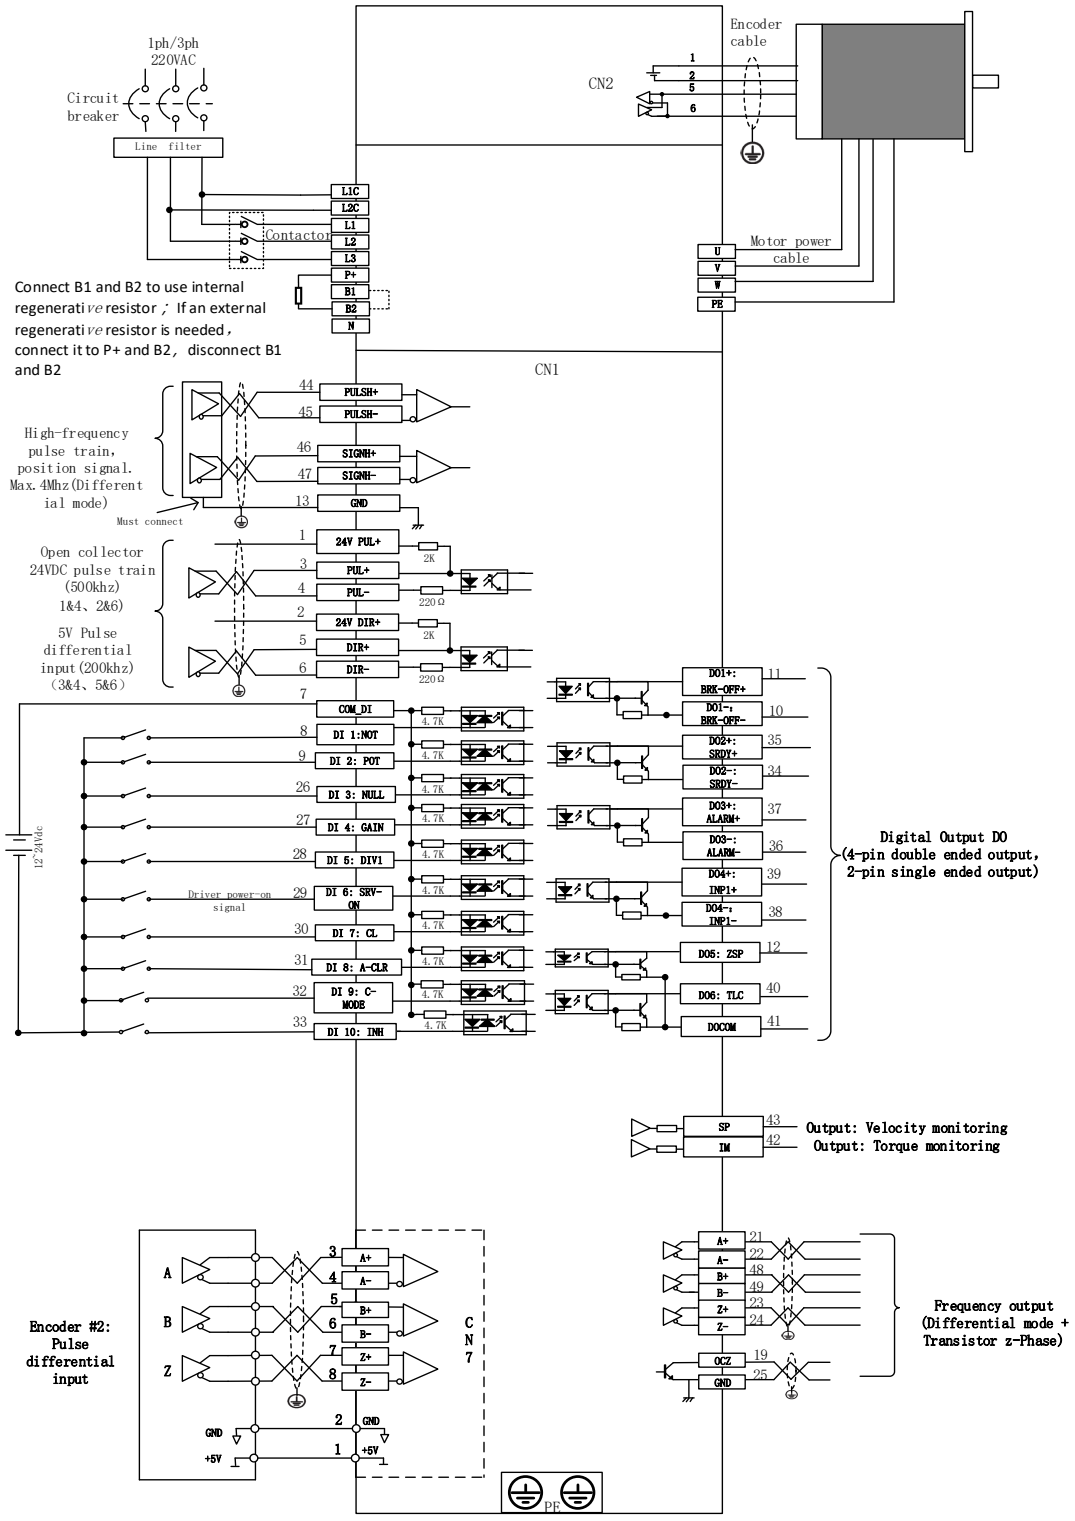


*Note: Please set **P00.05 to 1** when using high-frequency pulse train (max. 4 MHz)*

4.2.2 Velocity/Torque Control Mode Wiring Diagram


Velocity control mode wiring diagram

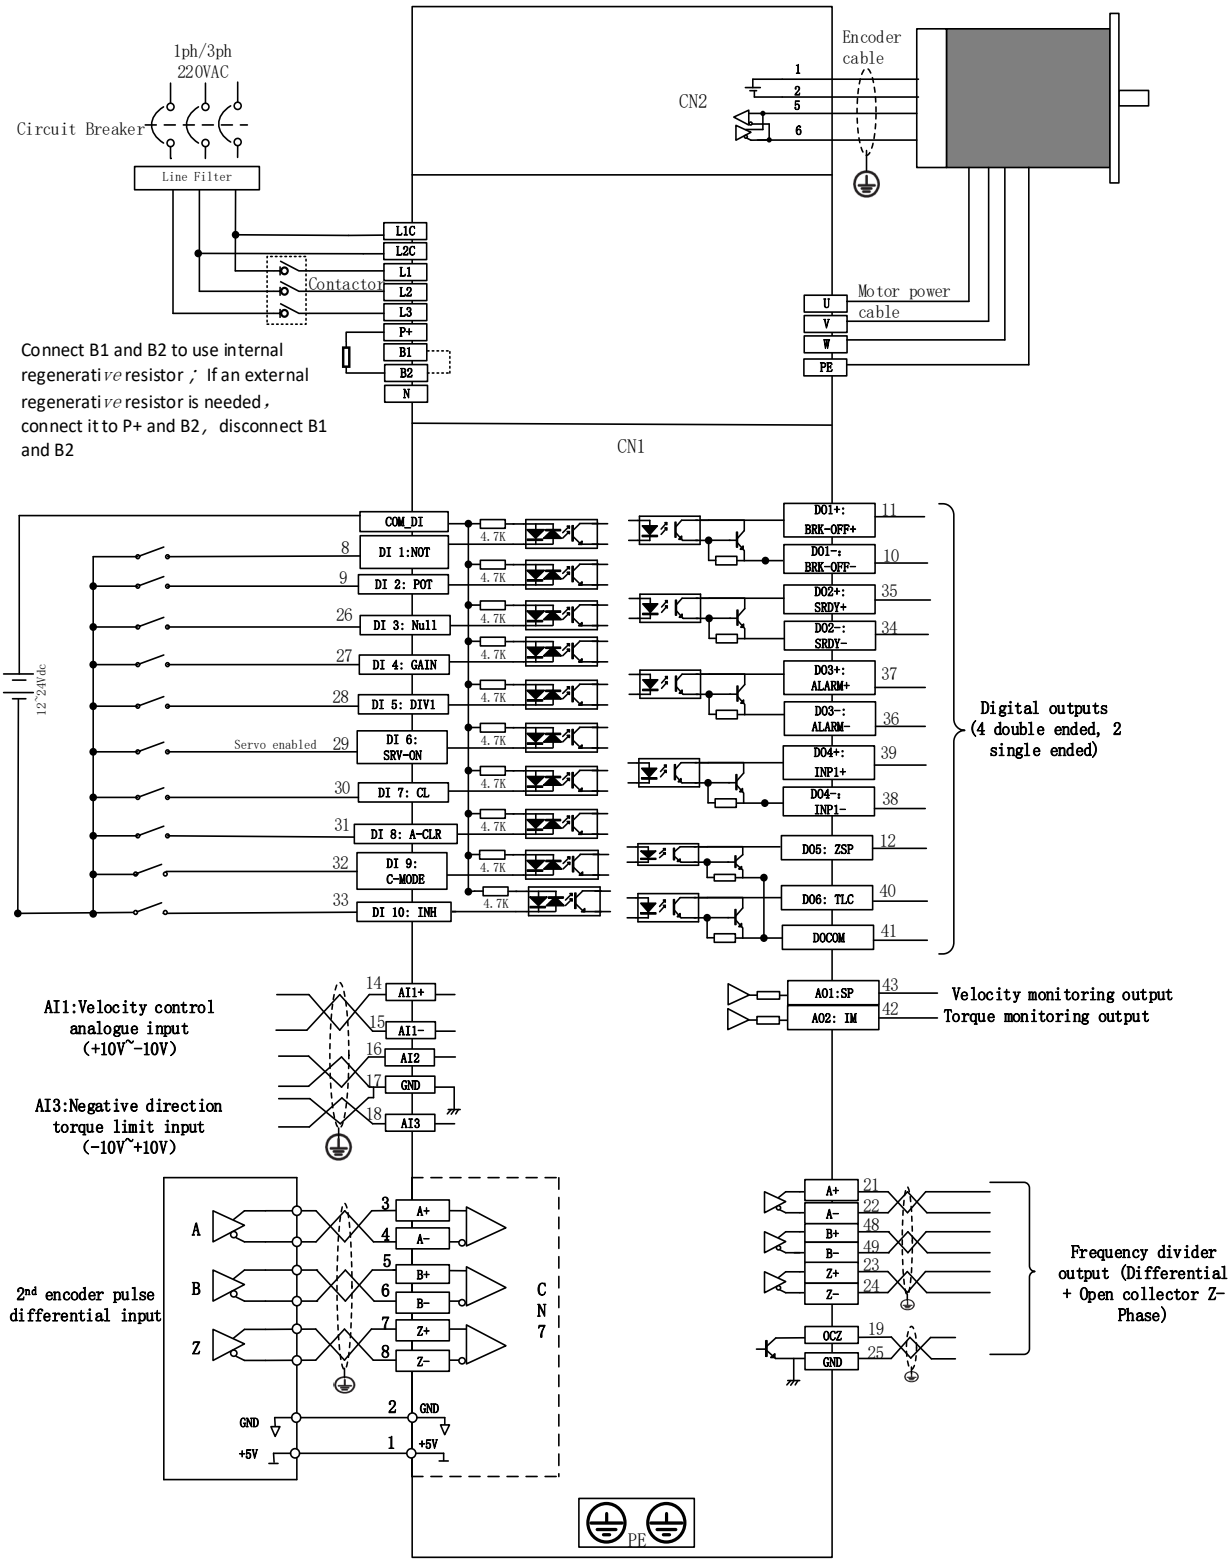

Torque control mode wiring diagram

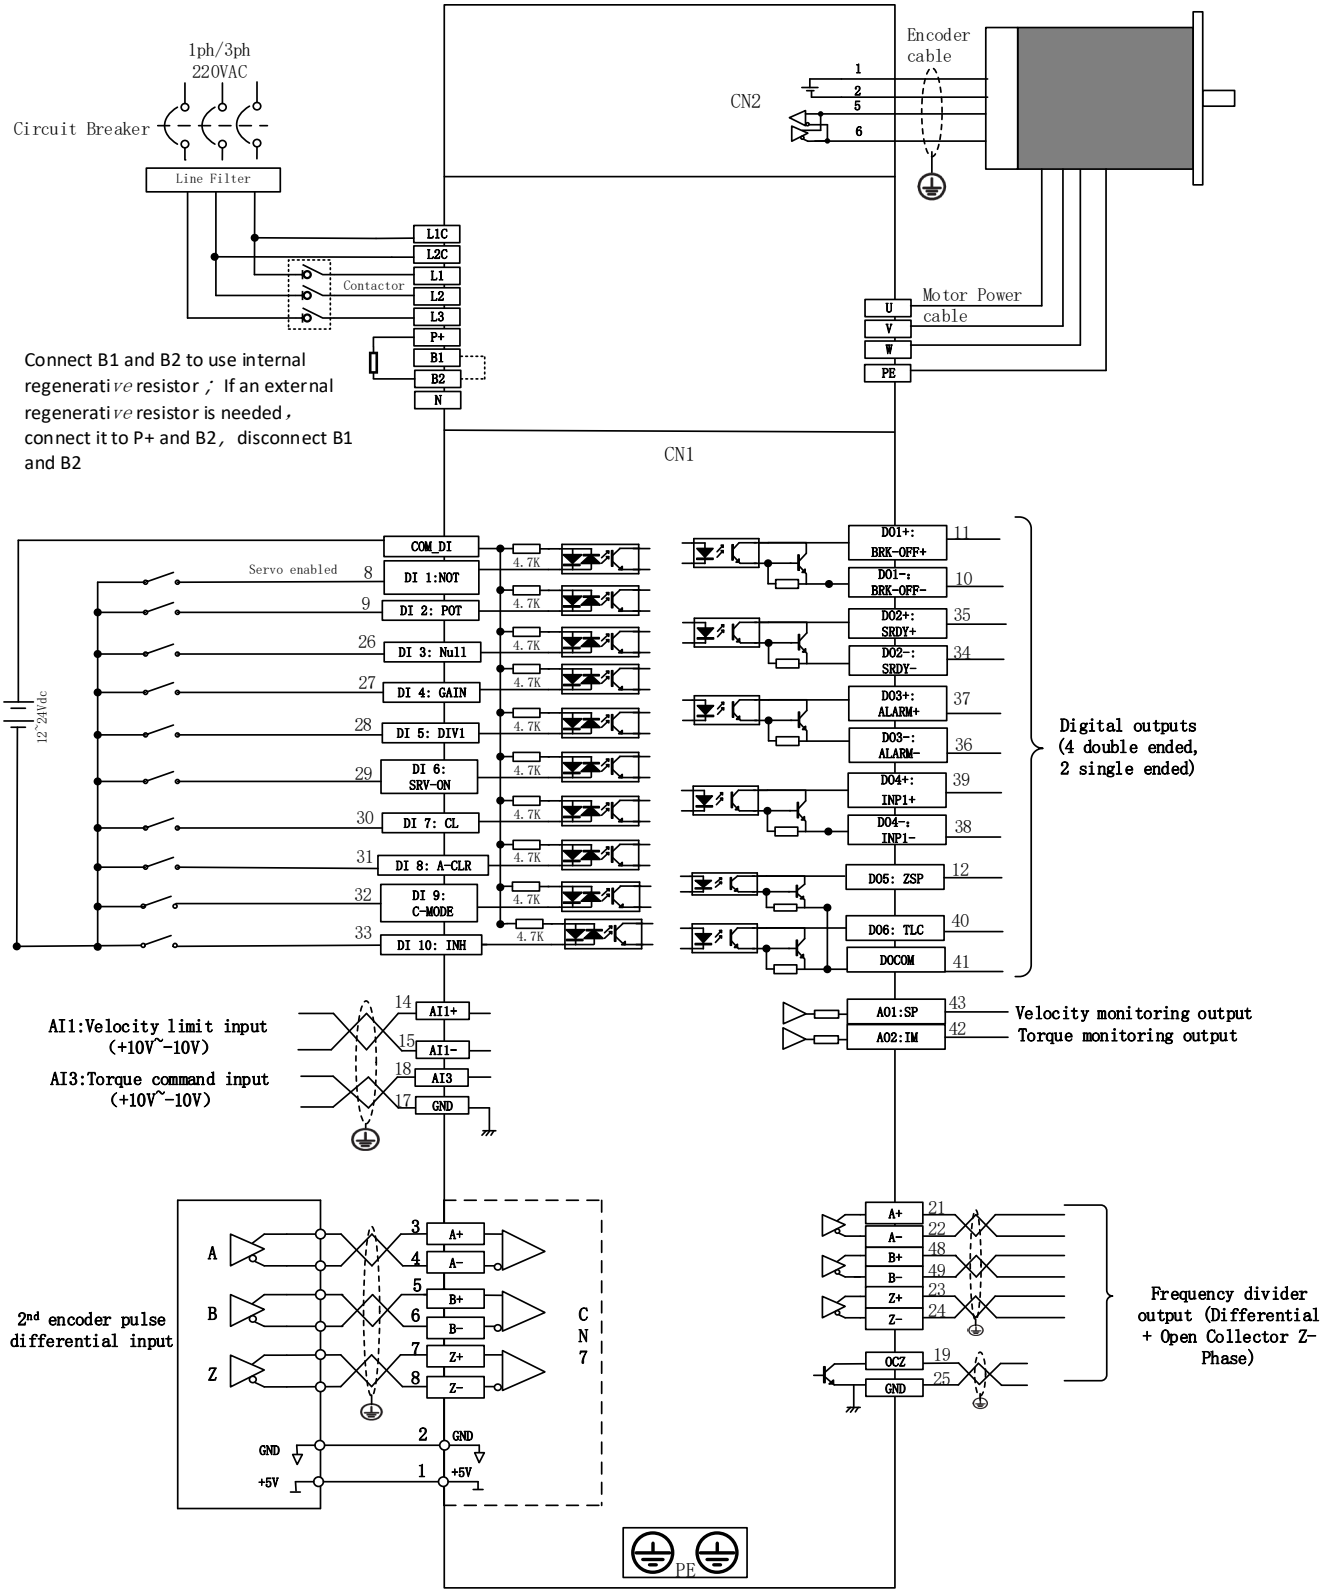


4.3 Servo Driver Ports

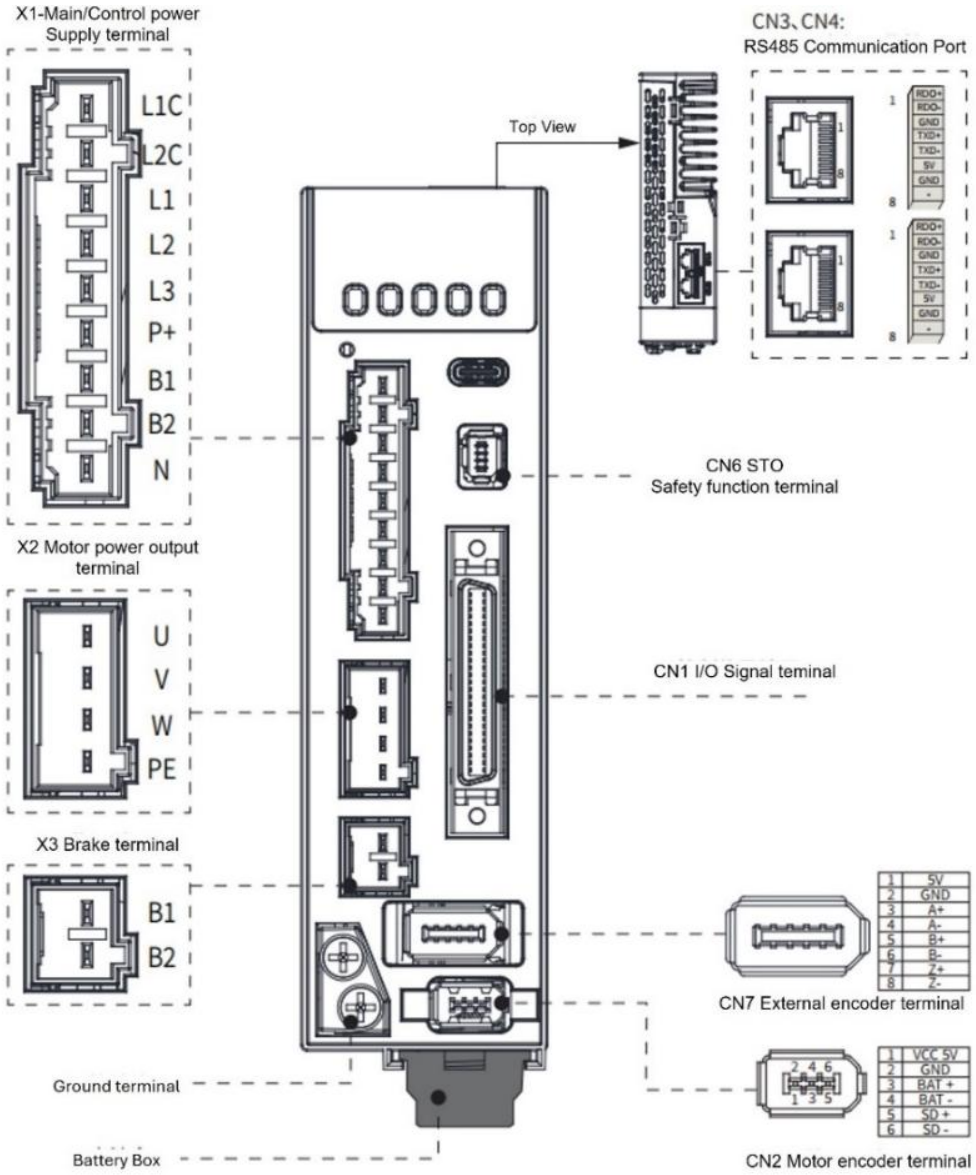

Connector	Description	Connector	Description
CN1	I/O signal connector（50PIN）	X1	Main/Control circuit power supply
CN2	Motor encoder feedback	X2	Motor power supply
CN3	RS485 Communication port	X3	Holding brake terminal
CN4	RS485 Communication port	PC	USB type C port
CN6	STO Safety Torque Off port	Ground Terminal	Connect to power ground terminal for grounding
CN7	External encoder feedback	-	-

Only the full-function version includes CN6&CN7 terminals and supports the corresponding features

4.4 X1 Main/Control Circuit Power Supply

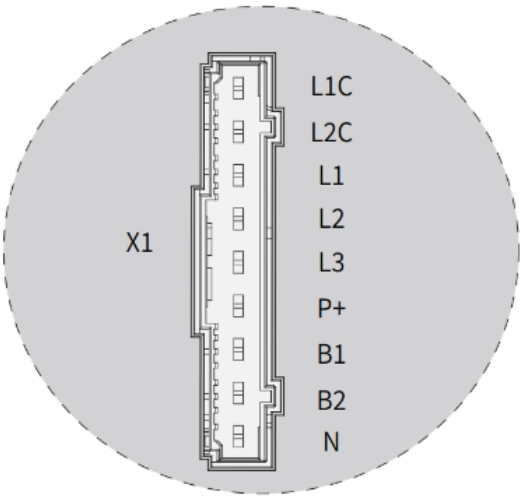

Pin	Label	Explanation	Remarks
L1C	Control circuit L1	Control circuit power supply. Single phase 220VAC	① Optional isolated switching power supply. ② Connecting to 380VAC will cause damage to driver. ③ Line filter is suggested in environment with strong interference. Use a fuse-less circuit breaker to turn on/off power supply to driver.
L2C	Control circuit L2		
L1	Main power supply L1	Single phase 220VAC. Supports 1ph/3ph 220VAC, -10%～+10%,50/60Hz	
L2	Main power supply L2		
L3	Main power supply L3		
P +	DC Bus positive terminal	1. Internal DC bus positive terminal 2、External regenerative resistor P terminal	Connect B1 and B2 to use internal regenerative resistor. If an external regenerative resistor is needed, connect it to P+ and B2, disconnect B1 and B2.
B1	Regenerative resistor terminal	Internal regenerative resistant drawing terminal	
B2	Regenerative resistor terminal	Internal IGBT transistor	
N	DC Bus negative terminal	Internal DC bus negative terminal	Please don't connect to any cable

4.4.1 Main Power Supply Cable Selection

Please connect to L1C/L2C (Control circuit) and L1/L2/L3 (Main power) to rated power supply voltage for the driver to operate under normal working condition. Driver will not function without both connected properly.

Main power supply wire gauge

Driver	Wire diameter (mm2/AWG)				
	Rated Input Current (A)	L1、L2、L3	P+, (B2)Br	U、V、W	PE
Single Phase 220V					
E-DHAS01P	2.0	1.3/AWG16	2.1/AWG14	0.52/AWG14	0.52/AWG14
E-DHAS04P	5.0	1.3/AWG16	2.1/AWG14	0.52/AWG14	0.52/AWG14
E-DHAS08P	7.9	1.3/AWG16	2.1/AWG14	0.52/AWG14	0.52/AWG14
E-DHAS10P	9.6	2.1/AWG14	2.1/AWG14	0.52/AWG14	0.52/AWG14

*If 3-phase 220VAC is used, wire diameter could be smaller than the listed above.


- For 3-phase 220V, L1/L2/L3 wires can be thinner than single-phase.
- Use a thick ground wire and ground the PE terminals of both driver and motor at one point (resistance < 100 Ω).
- Use a 3-phase isolation transformer to reduce electric shock risk.
- Add a noise filter to improve interference resistance.
- Install a non-fuse breaker (NFB) to cut power during driver faults.

CN1 is used for control signal wiring, CN2 is encoder feedback signal wiring.


- Use shielded cables (twisted preferred): CN1 ≥ 0.14 mm², CN2 ≥ 0.25 mm²; connect shield to FG.
- Limit cable length: CN1 ≤ 3 m, CN2 ≤ 20 m.
- Keep cables away from power lines to reduce interference.
- Add surge protection: diode for DC coils, RC snubber for AC coils
- Notice
- U, V, W must match motor windings—no reversal.
  Secure cables away from heat sources to avoid heat damage to insulation.
  The servo driver contains large electrolytic capacitors that retain high voltage even after power off , Wait 5 minutes after power off before touching driver or motor.

4.4.2 Single/Three Phase Power Supply Wiring Diagram

Single Phase 220VAC

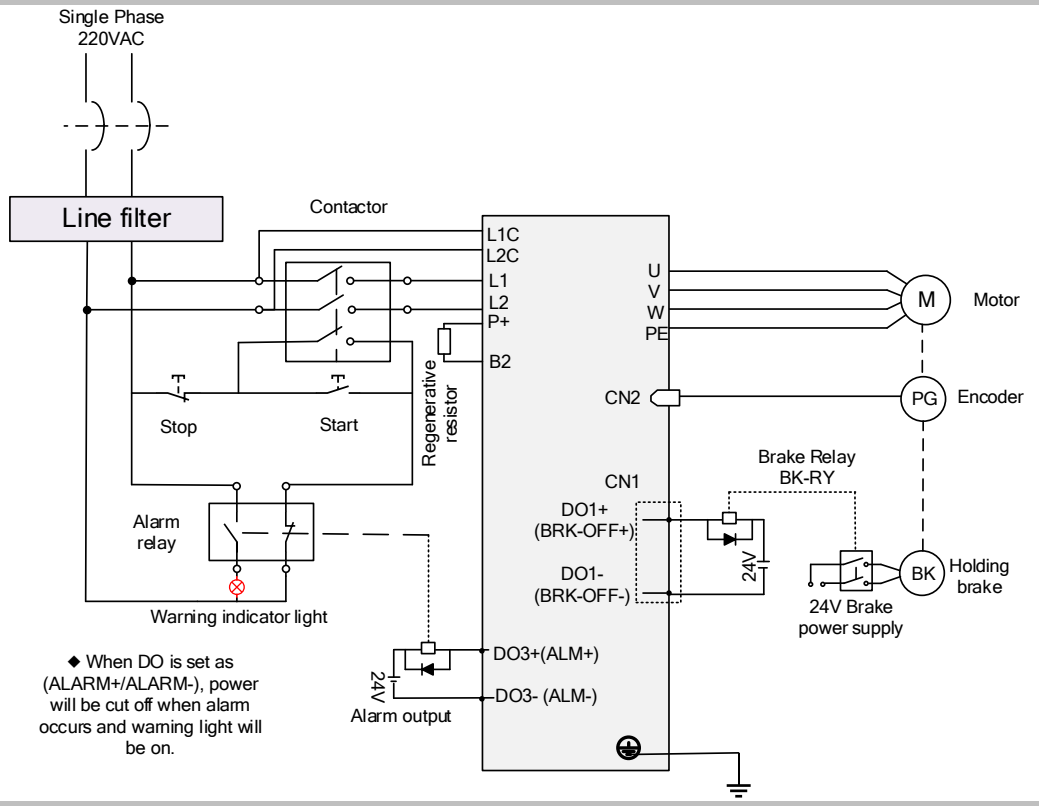

Three Phase 220VAC

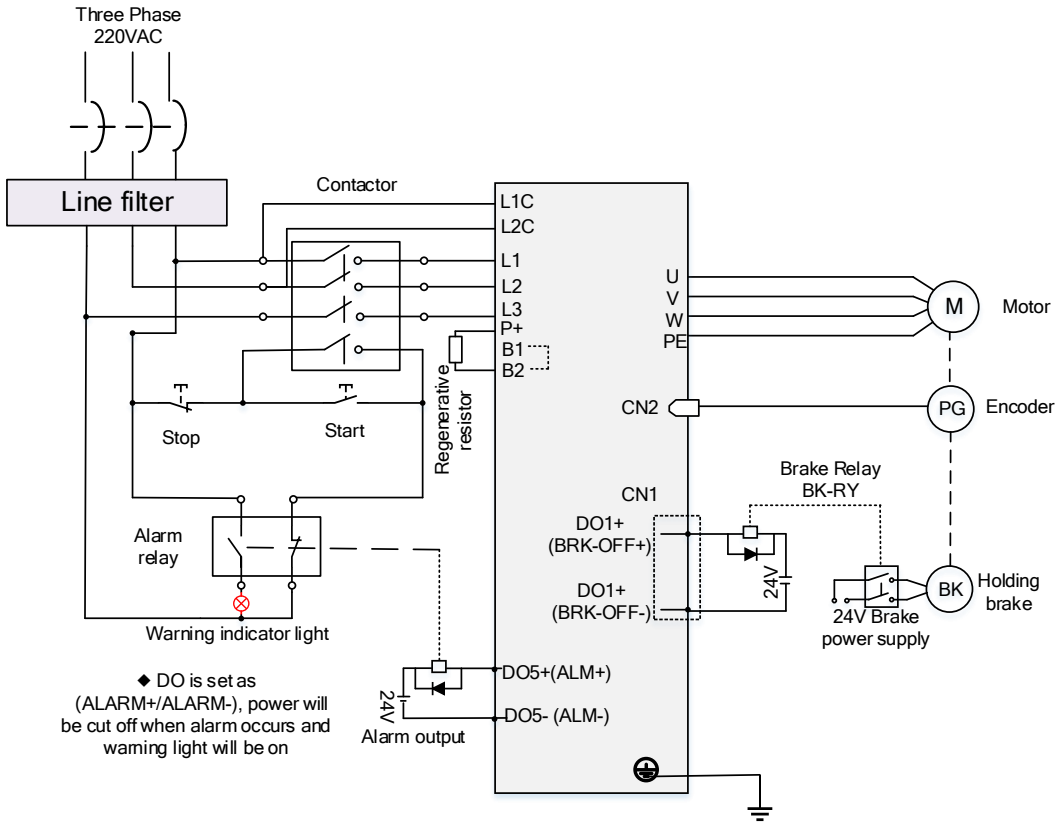

4.4.3 Regenerative Resistor Selection and Connections

The use of regenerative resistor

When the motor opposes the direction of rotation as in deceleration or vertical axis escalation, part of the regenerative energy will be delivered back to the driver. This energy will first be stored in internal capacitors of the driver. When the energy stored in the capacitors reaches the maximum capacity, a regenerative resistor is required the excessive energy to prevent over-voltage.

Table 4-1 Recommend Regenerative Resistance

Model	Resistance (Ω)	Power rating (W)	Minimum resistance allowed (Ω)	Minimum power allowed (W)
E-DHAS01P	100	50	50	50
E-DHAS04P	100	50	50	50
E-DHAS08P	100	50	40	50
E-DHAS10P	100	50	30	75

If detailed data such as acceleration/deceleration times (motion cycles), torque during acceleration/deceleration, and load inertia are unavailable, you may skip the following selection steps and choose a suitable regenerative braking resistor using the method described below.

To connect an external braking resistor, configure the following parameters:
P07.31 Discharge Mode = 0 to enable resistor discharge function
P00.16 / P00.17 to set the correct regenerative resistor power and resistance value

Calculation of regenerative resistance under normal operation

Steps:
1. Determine if driver comes with a regenerative resistor. If not, please prepare a regenerative resistor with resistance value higher than might be required.
2. Monitor the load rate of the regenerative resistor using front panel (d14). Set the driver on high velocity back and forth motions with high acceleration/deceleration.
3.Please make sure to obtain the value under following conditions: Driver temperature < 60℃, d14<80(Won't trigger alarm), Regenerative resistor is not fuming, No overvoltage alarm (Err120).

Pb(Regenerative power rating) = Resistor power rating x Regenerative load rate (%)

Please choose a regenerative resistor with power rating Pr about **2-4 times the value of Pb** in considered of harsh working conditions and some 'headroom'.
If the calculated Pr value is less than internal resistor power rating, external resistor is not required.

$$R(\text{Max. required regenerative resistance}) = (380^2 - 370^2)/Pr$$

Problem diagnostics related to regenerative resistor:
If driver temperature is high, reduce regenerative energy power rating or use an external regenerative resistor.
If regenerative resistor is fuming, reduce regenerative energy power rating or use an external regenerative resistor with higher power rating.
If d14 is overly large or increasing too fast, reduce regenerative energy power rating or use an external regenerative resistor with higher power rating.
If driver overvoltage alarm (Er120) occurs, please use an external regenerative resistor with lower resistance or connect another resistor in parallel.

Please take following precautions before installing an external regenerative resistor.
1. Please set the correct resistance value in P00.16 and resistor power rating P00.17 for the external regenerative resistor.
2. Please ensure the resistance value is higher or equals to the recommended values in table 4-1. Regenerative resistors are generally connected in series, but they can also be connected in parallel to lower the total resistance.
3. Please provided enough cooling for the regenerative resistor as it can reach above 100℃ under continuous working conditions.
4. The min. resistance of the regenerative resistor is dependent on the IGBT of the regenerative resistor circuit. Please refer to the table above.

Theoretical selection of regenerative resistor

Without external loading torque, the need for an external regenerative resistor can be determined as the flow chart below


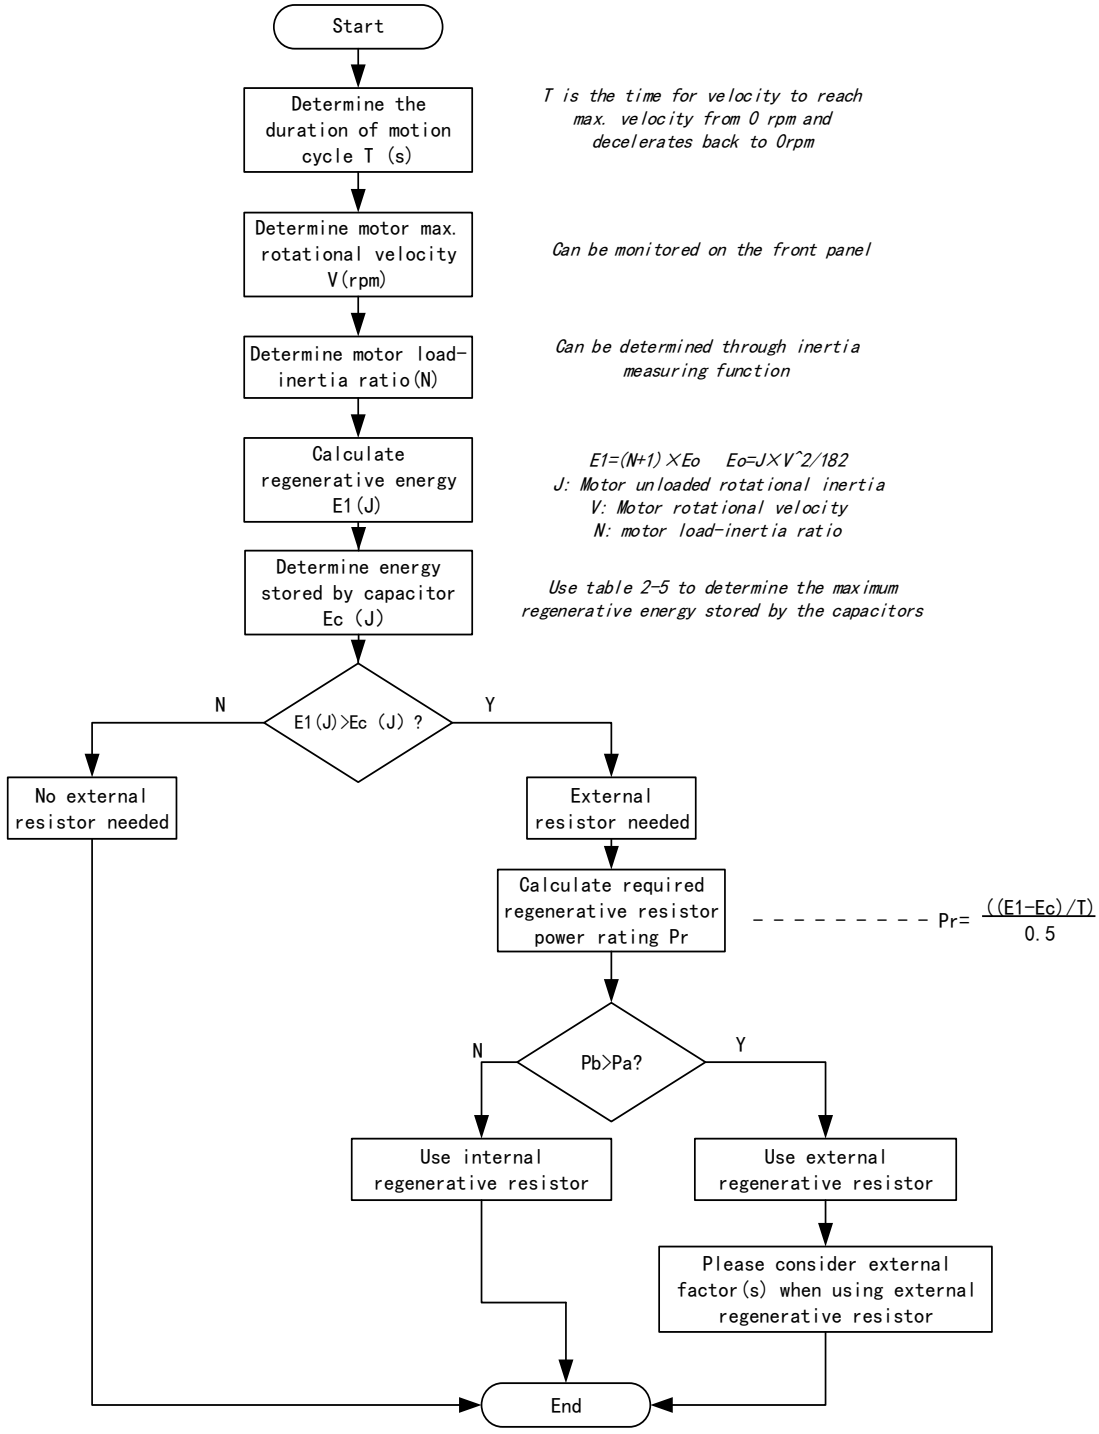


Diagram below shows the acceleration and deceleration cycle periods and the regenerative torque that occurs during the process.

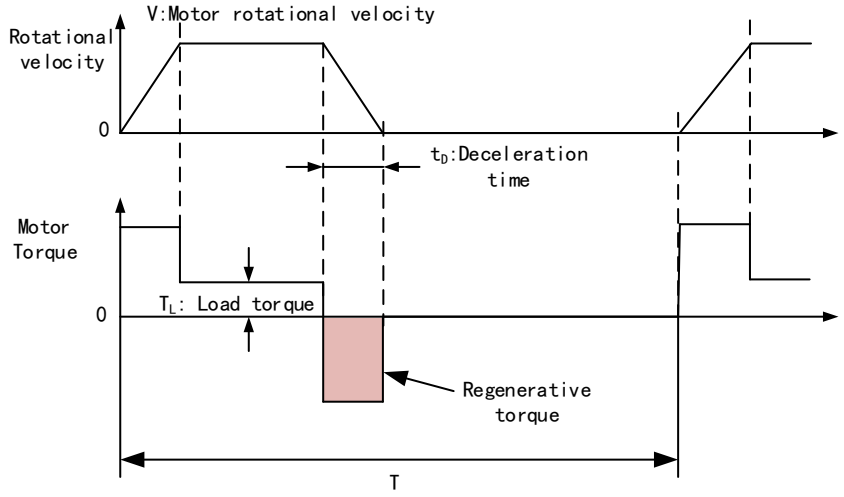

Steps to calculate capacity of regenerative resistor

Steps	Calculation	Symbol	Formula
1	Servo system regenerative energy	E1	$E1=(N+1)\times J\times V^2/182$
2	Depleted energy from loss of load system during acceleration	E_L	$E_L = (\pi/60)\ V\times T_L\times tD$ If loss is not determined, please assume $E_L = 0$.
3	Depleted energy due to motor coil resistance.	E_M	$E_M=(U^2/R)\times tD$ R= coil resistance, U = operating voltage If R is not determined, please assume $E_M = 0$.
4	Energy stored by internal DC capacitors	Ec	-
5	Depleted energy due to regenerative resistance	E_K	E_K=E1-(EL+EM+EC), If loss is ignored, EK=E1-EC
6	Required power rating of regenerative resistor	Pr	$Pr=E_K/(0.5\times T)$

Internal capacitor capacity and rotor inertia

E-DHAS□□P Drive	Servo Motor	Rotor Inertia ($\times 10^{-4}$kg.m^2）	Max. regenerative energy stored in capacitor Ec(J)
E-DHAS01P	E-MASH2-0401	0.048	13.46
E-DHAS04P	E-MASH2-0604	0.58	13.47
E-DHAS08P	E-MASH2-0808	1.66	22.85
E-DHAS10P	E-MASH2-0810	2.03	27.74

There are motors with low, medium and high inertia. Different motor models have different rotor inertia. Please refer to product catalogue for more information on rotor inertia.

Calculation examples:
Servo driver: E-DHAS08P, Servo Motor: E-MASH2-0808. When T = 2s, rotational velocity = 3000rpm, load inertia is 5 times of motor inertia.

E-DHAS□□P Drivers	Servo motor	Rotor Inertia （× 10^{-4}kg.m^2）	Max. regenerative energy stored in capacitor Ec(J)
750W	E-MASH2-0808	1.66	22.85

Regenerative energy produced:

$$\mathrm{E1} = \frac{(\mathrm{N}+1) \times \mathrm{J} \times \mathrm{V}^2}{182} = \frac{(5+1) \times 1.66 \times 3000^2}{182} = 49.3\mathrm{J}$$

If E1<Ec, internal capacitors can't take in excessive regenerative energy, regenerative resistor is required.
Required regenerative resistor power rating Pr:

$$\mathrm{Pr} = \frac{(\mathrm{E1}-\mathrm{Ec})}{0.5\mathrm{T}} = \frac{49.3-22.85}{0.5 \times 2} = 26.45\mathrm{W}$$

Hence, with the internal regenerative resistor Pa = 75W, Pr<Pa, no external regenerative resistor is required.

Let's assume if the load inertia is 15 times of motor inertia, Pr = 108.6W, Pr>Pa, external regenerative resistor is required. And to consider for harsh working environment,

Pr(external)=108.6/(1-40%)=181 W

When selecting the resistance of the regenerative resistor, please be higher than the minimum value recommended in table 4-1 but lower than Rmax

Rmax =(380^2-370^2)/Pr=7500/108.6=69Ω

In conclusion, a regenerative resistor with resistance 40Ω - 70Ω and power rating 110W to 180W can be chosen.

Please take note that theoretical calculations of regenerative resistance are not as accurate as calculations done under normal operation.

When External Load Torque Exists, in cases where external load torque is present and causes the servo motor to perform negative work. Normally, when the motor performs positive work, the torque direction matches the rotation direction. In special cases, the torque direction is opposite to the rotation direction, resulting in negative work. External energy is converted into electrical energy and fed back to the drive.

Example: When the external load force and rotation direction are the same (e.g., a vertically mounted mechanism moving downward), the servo system must apply reverse torque to counteract the excessive load (gravity). This causes a large amount of energy to return to the drive. If the bus capacitor is full, the excess energy is dissipated through the regenerative resistor. In such cases, the required external resistor capacity is typically large.

Calculation Example: Motor: 750W E-MASH2-0808, External load torque: +70% of rated torque (2.39 N·m).


When speed reaches 3000rpm, needed power of external regenerative resistor is:

$$\left[(0.7 \times 2.39) \times \frac{3000+2\pi}{60}\right] \div 0.5 = 1051W$$

The resistance value refers to the minimum resistance of 40Ω of the 750W drive regeneration resistor, so a 40Ω, 1000W external regeneration resistor is selected.


If the external resistor environment is harsh, derating needs to be considered.

Regenerative resistor connection

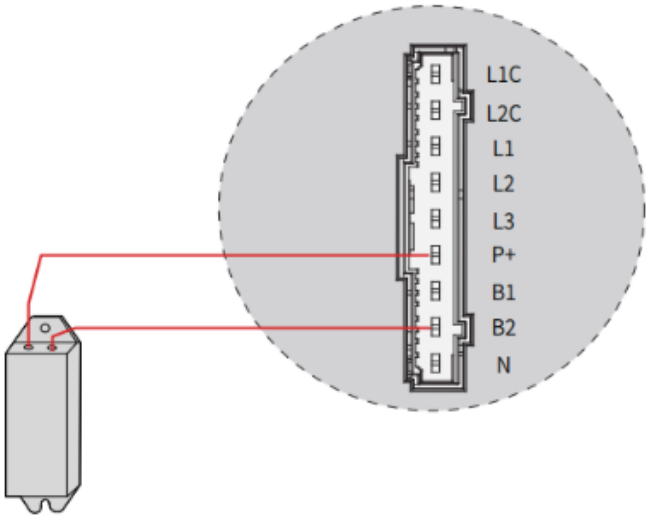


If B1 and B2 are connected, internal regenerative resistor is now functional; if an external regenerative resistor is required, please disconnect B1 and B2 and connect P+ to B1 to prevent overcurrent.
Please do not connect external regenerative resistor directly to N or it might cause fire hazard.
Please refer to the section above to select minimum allowable resistance for the external regenerative resistor or it might damage the driver.
Please confirm P00.16 and P00.17 before using any regenerative resistor.
Do not set the regenerative resistor near any flammable object.

4.5 X2 Motor Power Supply



Pin	Label	Explanation	Remarks
U	U terminal	To motor U terminal	① Please make sure U, V, W terminals of driver and motor are correctly connected. ② Connect motor PE to driver PE and ground.
V	V terminal	To motor V terminal	
W	W terminal	To motor W terminal	
PE	PE	Motor frame	

Motor Power Cable Selection (Port X2)

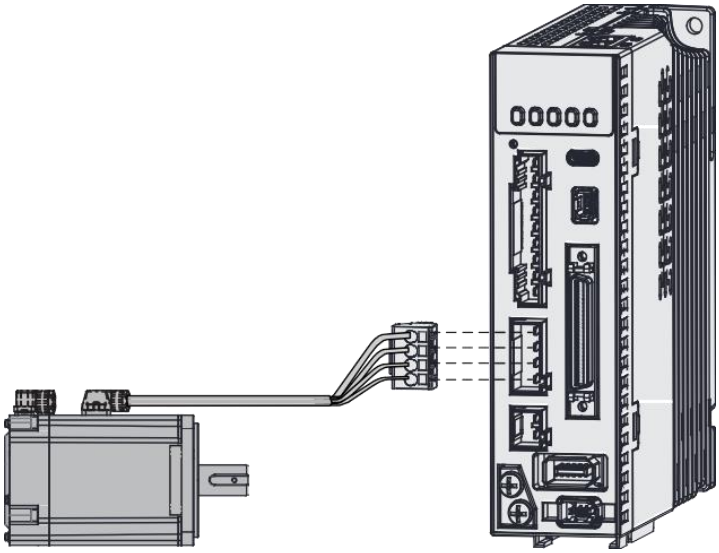


Example of motor power cable connection using an AMP electrical connector
Please connect the wires to corresponding terminals as labeled.

Motor winding power cable:

- Available in standard lengths of **1.5M**, **3M**, or **5M**.
- Below are our commonly used cable models:
  (*M* indicates cable length, e.g., 1M5 = 1.5 meters.
- Indicates cable exit direction: *-N* for axial, *-R* for reverse exit.)


E-MASH2 Series Frame Size 80 and below

Direct connector E-CASP*M*-* without holding brake

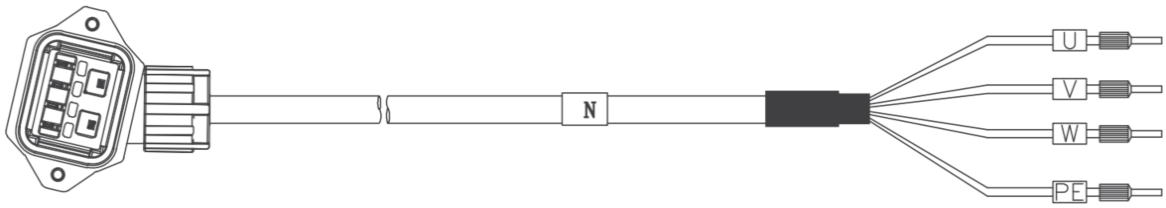


Motor side Driver side

Driver cable pin	Pins




Motor	Color	Driver
1	Blue	U
2	Black	V
3	Red	W
4	Yellow- green	PE

Direct connector E-CASPB*M*-* Winding cable with holding brake

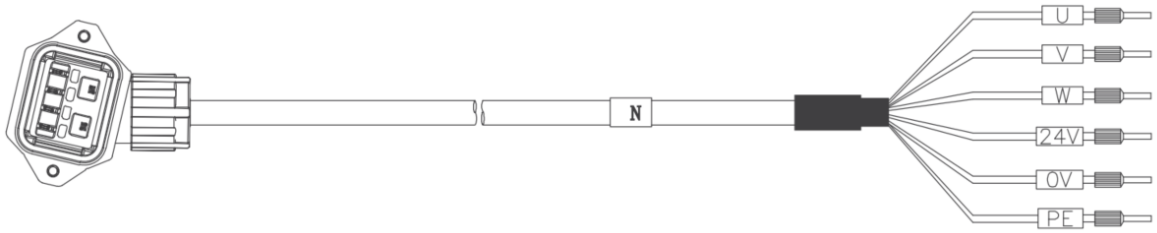


Motor side Driver side

Motor cable pin	Pin



Motor	Color	Driver
1	Blue	U
2	Black	V
3	Red	W
4	Yellow- green	PE
A	Black	0V
B	Red	24V

4.6 X3 Holding Brake




Pin	Label	Explanation	Remarks
BR+ （BR1）	Brake positive terminal	Connect to external power supply 24v negative terminal	No need for an external relay
BR- (BR2)	Brake negative terminal	Connect to motor brake terminal 0V	

Note:
The holding brake cable is integrated with the motor power cable.


Holding brake wiring diagram

Holding brake is activated when servo driver is not powered on to prevent axis from moving due to gravitational pull or other external forces by locking the motor in place. Usually used on axis mounted vertically to the ground so that the load would not drop under gravitational force when the driver is powered off or when alarm occurs.
E-DHAS□□P series servo drivers support direct drive holding brake. Please connect BR+ and BR- to an external 24v power supply and motor brake terminal to control the holding brake. There is no need for an external relay.

1. Using internal holding brake output port X3 (Easy wiring, no need for an extra relay)

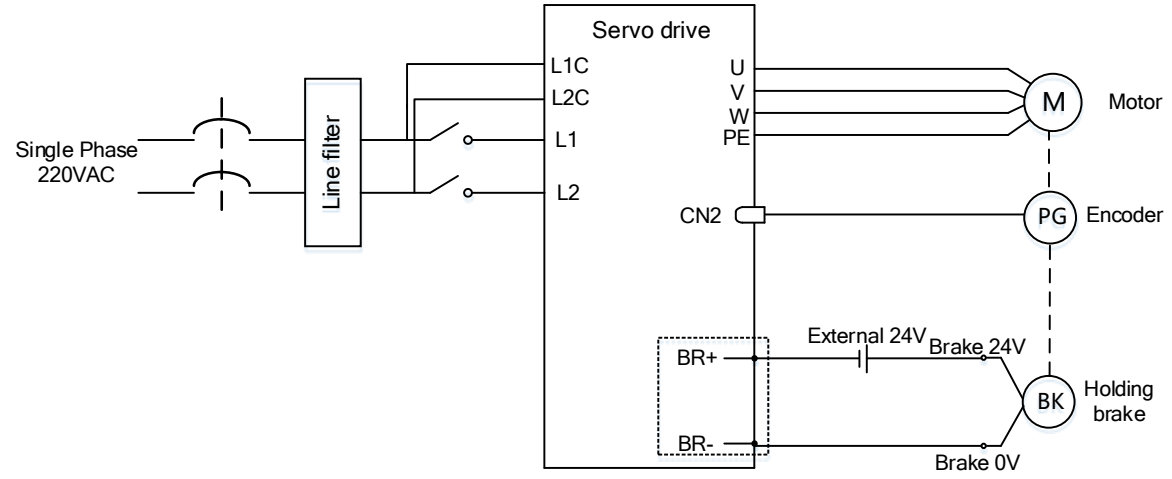


2.Connect to the DO(BRK+/BRK-)

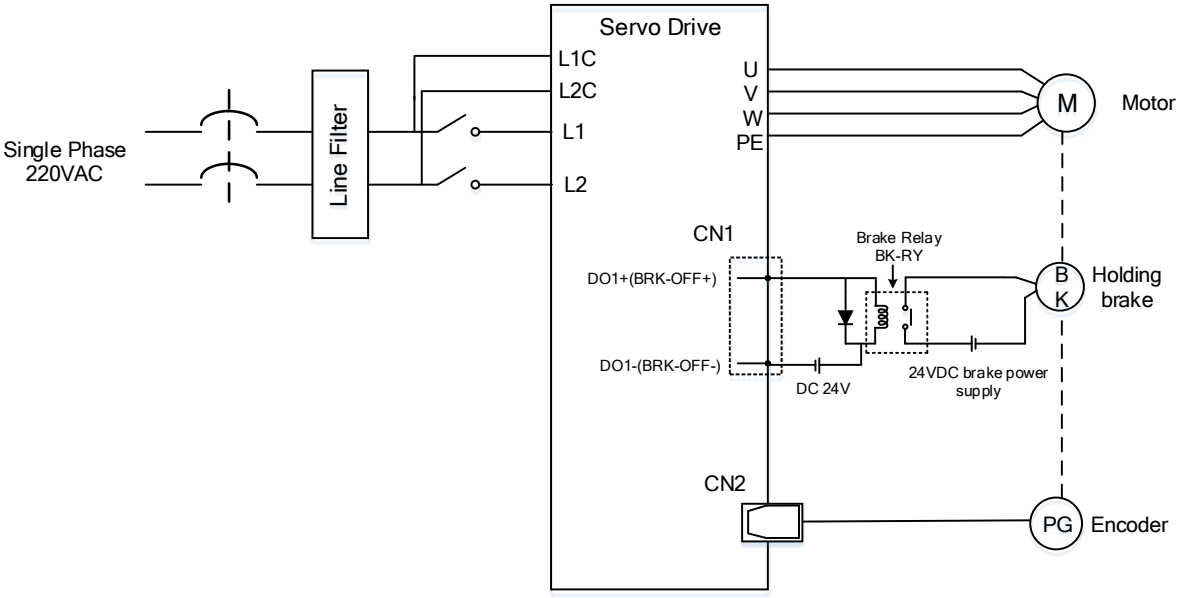

4.7 CN1 I/O Signal

E-DHAS□□P series servo drivers use SCSI 50-Pin connector.

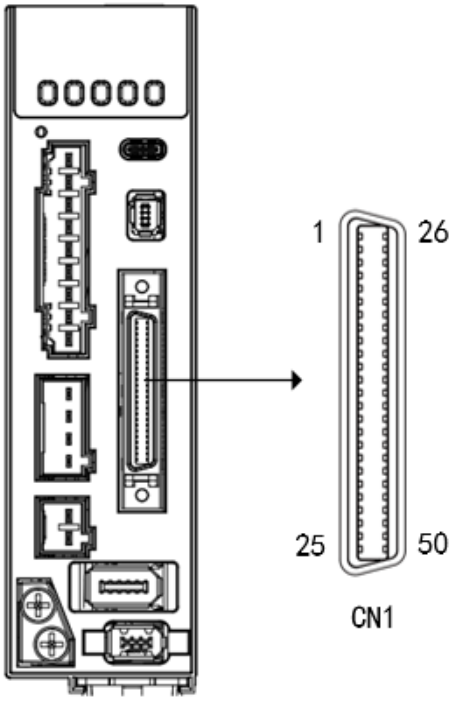

Note: It is recommended to use 24-26AWG cables for CN1

4.7.1 CN1 Full Pin Assignment Table

Pin	Signal	Direction	Type	Default Function	Parameter	Description
1	PUL+24	Input	24V Input	Pulse Train +	P00.05/ P00.07	Low-frequency pulse train direction signal PUL+ & PUL-：5V differential (500KHz) DIR+ & DIR-： 5V differential (500KHz) PUL+24 & PUL-: 24V single ended (200KHz) DIR+24 & DIR-: 24V single ended (200KHz)
2	DIR+24	Input	24V Input	Direction +	P00.05/ P00.07	
3	PUL+	Input	5V Differential Input	Pulse Train +	P00.05/ P00.07	
4	PUL-	Input	24V / 5V Input	Pulse Train -	P00.05/ P00.07	
5	DIR+	Input	5V Differential Input	Direction +	P00.05/ P00.07	
6	DIR-	Input	24V / 5V Input	Direction -	P00.05/ P00.07	
7	DI-COM	Common	Digital Input Common	—	—	Common for DI1~DI10
8	DI1	Input	Digital Input	NOT	P04.00	Configurable
9	DI2	Input	Digital Input	POT	P04.01	Configurable
10	DO1-	Output	Double-ended DO+	BRK-OFF-	P04.10	Configurable
11	DO1+	Output	Double-ended DO-	BRK-OFF+	P04.10	

12	DO5	Output	Single-ended DO	ZSP	P04.14	Configurable
13	GND	GND	Signal Ground	—	—	Ground
14	AI1	Input	Analog ±10V	Velocity Command	P03.xx	Velocity/Velocity limit (-10V～ +10 V)
15	GND	Input	Analog Ground	Analog GND	P03.xx	—
16	AI2	Input	Analog ±10V	—	P03.xx	—
17	GND	GND	Analog Ground	Analog GND	—	Ground
18	AI3	Input	Analog ±10V	Torque Command	P03.xx	Torque/ Torque limit (-10V～ +10 V)
19	OCZ	Output	Open Collector Output	Encoder Z	—	Encoder Z Output (Open collector)
20	GND	GND	Signal Ground	—	—	Ground
21	A+	Output	Differential Output	Encoder A+	P04.65/ P04.70	Encoder output A+
22	A-	Output	Differential Output	Encoder A-	P04.65/ P04.70	Encoder output A-
23	Z+	Output	Differential Output	Encoder Z+	P04.65/ P04.70	Encoder output Z+
24	Z-	Output	Differential Output	Encoder Z-	P04.65/ P04.70	Encoder output Z-
25	GND	GND	Signal Ground	—	—	Ground
26	DI3	Input	Digital Input	Null	P04.02	Configurable
27	DI4	Input	Digital Input	GAIN	P04.03	Configurable
28	DI5	Input	Digital Input	DIV1	P04.04	Configurable
29	DI6	Input	Digital Input	SRV-ON	P04.05	Configurable
30	DI7	Input	Digital Input	CL	P04.06	Configurable
31	DI8	Input	Digital Input	A-CLR	P04.07	Configurable
32	DI9	Input	Digital Input	C-MODE	P04.08	Configurable
33	DI10	Input	Digital Input	INH	P04.09	Configurable
34	DO2-	Output	Double-ended DO+	SRDY-	P04.11	Configurable
35	DO2+	Output	Double-ended DO-	SRDY+	P04.11	
36	DO3-	Output	Double-ended DO+	ALARM-	P04.12	Configurable
37	DO3+	Output	Double-ended DO-	ALARM+	P04.12	
38	DO4-	Output	Double-ended DO+	INP-	P04.13	Configurable
39	DO4+	Output	Double-ended DO-	INP+	P04.13	
40	DO6	Output	Single-ended DO	TLC	P04.15	Configurable
41	DOCOM	Common	Output Common	—	—	Common for DO5/DO6
42	AO1	Output	Analog Output	IM	P04.65	Monitor Output 1
43	AO2	Output	Analog Output	SP	P04.70	Monitor Output 2

44	PULSH+	Input	5V Differential	High-Speed Pulse +	P00.05	4MHz High-frequency pulse train, 5V differential input
45	PULSH-	Input	5V Differential	High-Speed Pulse -	P00.05	
46	SIGNH+	Input	5V Differential	High-Speed Direction +	P00.05	
47	SIGNH-	Input	5V Differential	High-Speed Direction -	P00.05	
48	B+	Output	Differential Output	Encoder B+	P04.65/ P04.70	Encoder output B+
49	B-	Output	Differential Output	Encoder B-	P04.65/ P04.70	Encoder output B-
50	FG	Shield	Frame Ground	—	—	Connect shield here

4.7.2 Pulse Command Wiring Examples

Pulse Input Selection Guide

Related parameters:





P00.05	Label	Command pulse input selection			Valid mode(s)	P		
	Range	0~1	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x000B		
	Valid	After restart						

Value	Description
[0]	Pulse input low speed channel (200/500kHz pulse input)
1	Pulse input high speed channel (4MHz pulse input)

Both channels cannot be used at the same time.

P00.07	Label	Command pulse input mode			Valid mode(s)	P		
	Range	0~3	Unit	—	Default	3		
	Byte length	16bit	Attribute	R/W	485 address	0x000F		
	Valid	After restart						

Command pulse input

Command pulse input mode settings (P00.07)	Command Pulse Mode	Positive signal	Negative signal
0 *or* 2	90°phase difference 2 phase pulse （Phase A+ Phase B）		
1	CW pulse sequence ＋ CCW pulse sequence		
[3]	Pulse sequence ＋ Directional symbol		

Command pulse input signal max. frequency and min. duration needed

Command pulse input interface		Max. Frequency	Min. duration needed (μs)					
			t1	t2	t3	t4	t5	t6
Pulse sequence interface	Differential drive	500 kHz	2	1	1	1	1	1
	Open collector	200 kHz	5	2.5	2.5	2.5	2.5	2.5
	High speed differential drive	4Mhz	0.25	0.125	0.125	0.125	0.125	0.125

Please set >0.1μs for the duration between rising and falling edge of command pulse input signal.
1 revolution with 2500 pulses 2-phase pulse input when P00.07=0 or 2, P00.08 = 10000.
1 revolution with 10000 pulses 1-phase pulse input when P00.07=1 or 3, P00.08 = 10000.

Pulse Train Signal Selection Table:

Command Mode	**P00.05**	**P00.07**
Pulse + Direction	0	3/5
CW / CCW	0	1/6
A/B Phase	0	0/2
High-Speed Pulse + Direction	1	3/5
High-Speed CW / CCW	1	1/6
High-Speed A/B Phase	1	0/2

24V Single-Ended Wiring

Power Supply	**PLC**		**Driver CN1**
24VDC	----------		Pin 1 PUL+24
	Pulse (DO)	----------	Pin 4 PUL-
24VDC	----------		Pin 2 DIR+24
	Direction (DO)	----------	Pin 6 DIR-
0VDC	----------	COM	

Notes:

- Maximum frequency 200 kHz
- Suitable for PLC low-speed single ended outputs
- External 24V supply required

Low Speed 5V Differential 500kHz

PLC		**Driver CN1**
Pulse+	----------	Pin 3 PUL+
Pulse-	----------	Pin 4 PUL-
Direction+	----------	Pin 5 DIR+
Direction-	----------	Pin 6 DIR-

Notes:

- Maximum frequency 500 kHz
- Suitable for PLC low-speed differential outputs
- Recommended for highest noise immunity
- Use twisted shielded pair cable

High-Speed 5V Differential 4 MHz

PLC		**Driver CN1**
Pulse+	----------	Pin 44 PULSH+


Pulse-	----------	Pin 45 PULSH-
Direction+	----------	Pin 46 SIGNH+
Direction-	----------	Pin 47 SIGNH-

Notes:

- Maximum frequency 4 MHz
- Suitable for PLC high-speed differential outputs
- Recommended for highest noise immunity
- Use twisted shielded pair cable

4.7.3 CN1 Signal Cable Selection


To ensure I/O signal is not affected by electromagnetic interference, a shielded cable is recommended for this application.

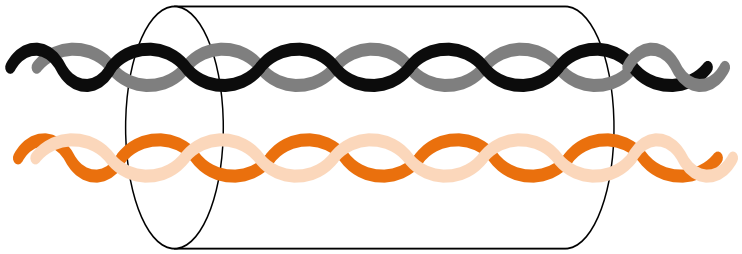

Cables for different analogue signals should be using isolated shielded cable while cables for digital signals should be shielded twisted pair cable. Cables for CN1 connectors should be 24-28AWG in diameter.

Please keep at least 30cm from main power supply/control circuit power cable (L1C/L2C/L1/L2/L3，U/V/W) to prevent electromagnetic interference of I/O signals.


4.8 CN2 Motor Encoder

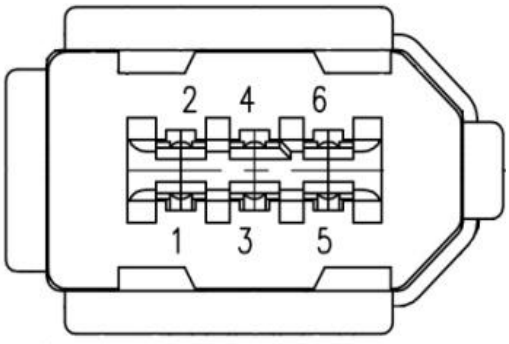

Port	Pin	Signal	Explanation
CN2	1	VCC5V	Power supply 5V
	2	GND	Power supply ground
	3	BAT+	Battery positive terminal
	4	BAT-	Battery negative terminal
	5	SD+	SSI Data+
	6	SD-	SSI Data-
	Frame	PE	Shield grounding


CN2 Motor Encoder Cable And Connector Selection

Direct connector E-CAS1E*M* Incremental encoder

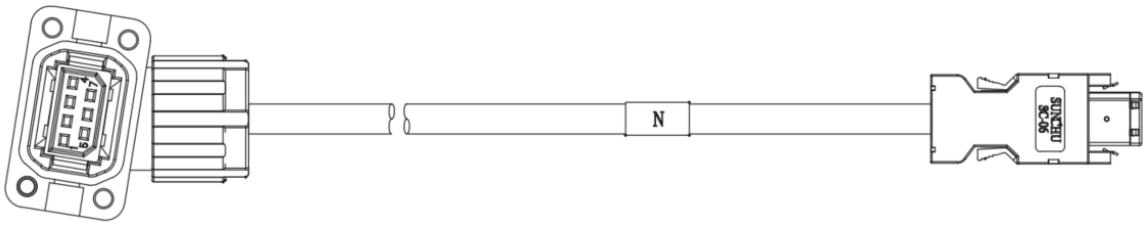


Motor side Driver side

Motor cable pin	Pin




Motor	Driver	Signal
1	Frame	Shielded
2	1	1 (+5V)
3	2	2 (0V)
4	5	5 (SD+)
5	6	6 (SD-)

Direct connector E-CAS2E*M*-* Absolute encoder

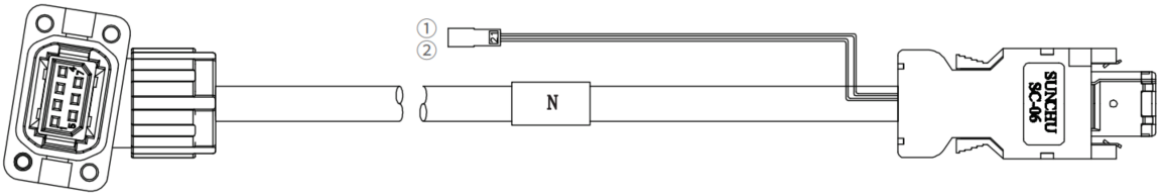


Motor side Driver side

Motor cable pin	Pin



Motor	Driver	Signal
1	Frame	Shielded
2	1	1 (+5V)
3	2	2 (0V)
4	5	5 (SD+)
5	6	6 (SD-)
6	3	① (BAT+)
7	4	② (BAT-)


Servo driver and Motor Encoder Wiring Example

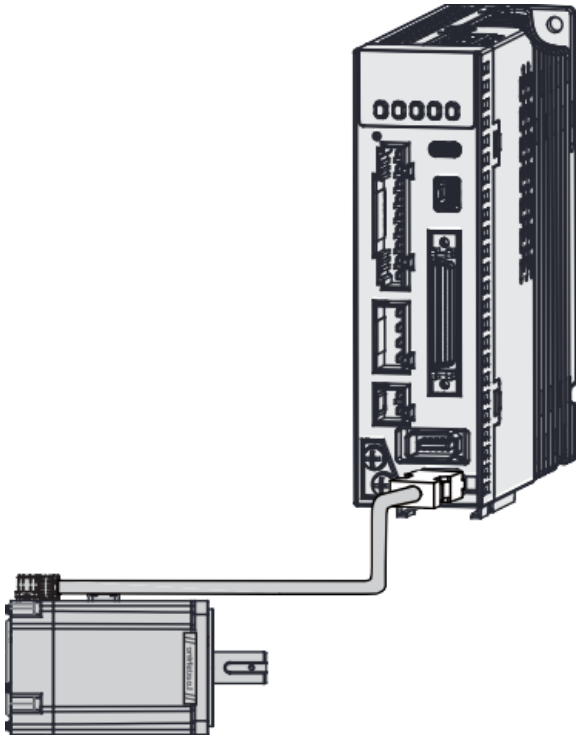


Ensure both drive-side and motor-side shields are properly grounded; otherwise, false alarms may occur.
It is recommended to use shielded twisted pair encoder cables. Do not use overly long cables.
Route encoder cables separately from power cables. Keep at least 30 cm distance to avoid interference.

Battery box for absolute encoder


Battery box installation as shown below:
When using our direct-wired motors that come with external battery wires (but no built-in battery box), the battery box can be mounted on the drive for connection.

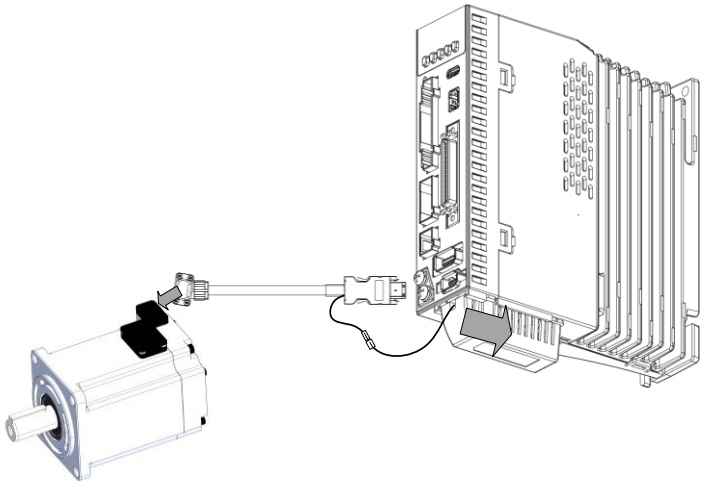


4.9 CN3/CN4 - RS485 Communication Port

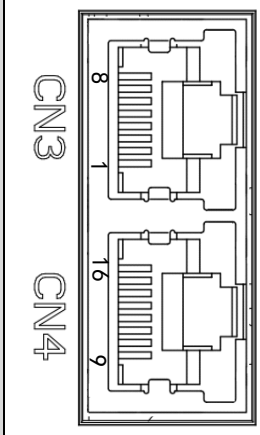Port	Diagram	Pin	Signal	Description
CN3 CN4		1	422+	422 data positive terminal (Gantry communication)
		2	422-	422 data negative terminal (Gantry communication)
		3	-	-
		4	485+	RS485 data positive terminal
		5	483-	RS485 data negative terminal
		6	5V	Reserved, 5V power positive terminal (50mA)
		7	-	-
		8	GND	Power GND
		Frame	PE	Shielding grounded

E-DHAS□□P series supports RS485 communication protocol which enables communication between single/multi axes and master device.

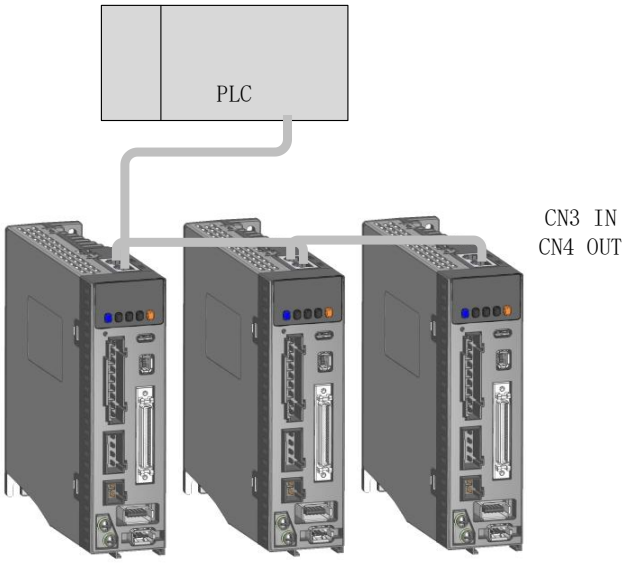

4.10 CN6 Safe Torque Off (STO) Port

Port	Pin	Signal	Description	Remarks
	1	24V	24v power supply	Connect to SF1 and SF2 when not in use. Do not use to supply power.
	2	0V	Reference ground	
	3	SF1-	Control signal 1 negative input	When SF1 = OFF or SF2 = OFF, STO is enabled.
	4	SF1+	Control signal 1 positive input	
	5	SF2 -	Control signal 2 negative input	
	6	SF2+	Control signal 2 positive input	
	7	EDM-	External monitoring device (EDM) with differential double ended output	When SF1 = OFF and SF2 = OFF, EDM = ON
	8	EDM+		

Introduction to Safe Torque Off (STO)


Function: Cut off motor current supply physically (through mechanical means)
STO module (CN6 connector) consists of 2 input channels. It cuts off the motor current supply by blocking PWM control signal from the power module. When the motor current is cut off, the motor will still move under inertia and stop gradually.
The STO function is set up ready to be used by factory default. Please remove STO connector if it is not needed.

STO functional principle

STO module cuts off the motor current supply and stops motor gradually by blocking PWM control signal from the power module through 2 isolated circuits. When an STO error occurs, the actual status of STO can be determined by the EDM status feedback.

SF1 Input	SF2 Input	EDM Output	PWM Control	Alarm
ON	ON	OFF	Normal	-
ON	OFF	OFF	Blocked	Er 1c2
OFF	ON	OFF	Blocked	Er 1c1
OFF	OFF	ON	Blocked	Er 1c0

STO wiring diagram

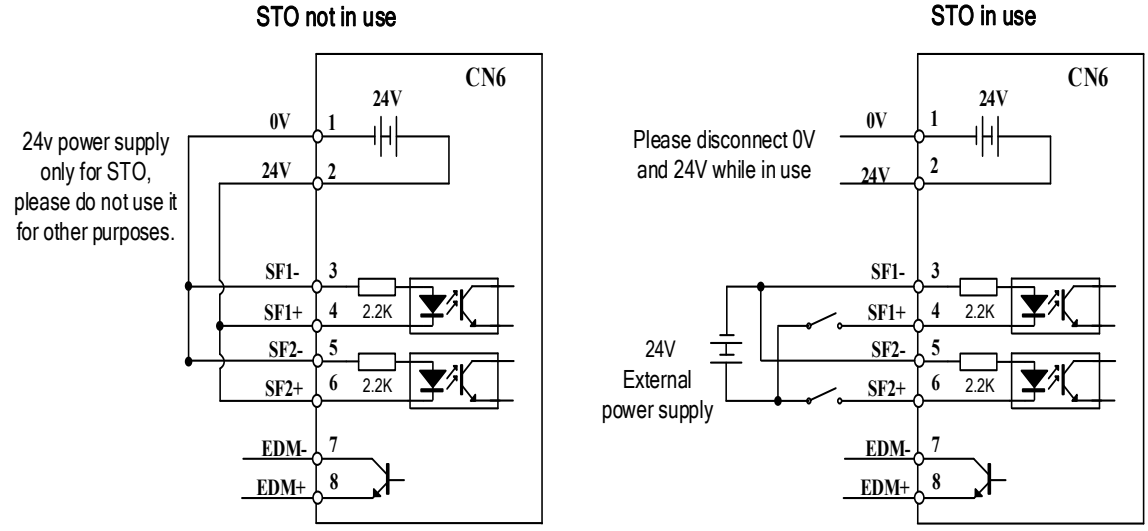


Please take precautions when enabling STO functions as servo driver will lose control over the motion of the motor. Motor might drop under gravitational pull (vertically mounted load) or move when external forces are applied to it. Alternatively, motor with holding brake can be chosen.
STO is not meant to cut off the power supply of the servo drivers and motors completely. Please power off and wait for a few minutes before starting maintenance work.
It is recommended to use an isolated power supply for STO signal input as any current leakage might cause STO malfunction.
Please remove the shorting connector from the STO port and use the STO cable provided if the function is required.

STO Alarm Reset Mechanism


STO1 Input Status	STO2 Input Status	Alarm Reset Method
OFF → ON	ON	Reset via host, upper PC, or power cycle (Er 1C1)
ON	OFF → ON	Reset via host, upper PC, or power cycle (Er 1C2)
OFF → ON	OFF → ON	Auto reset (Er 1C0)

4.11 CN7 2nd Encoder (External)

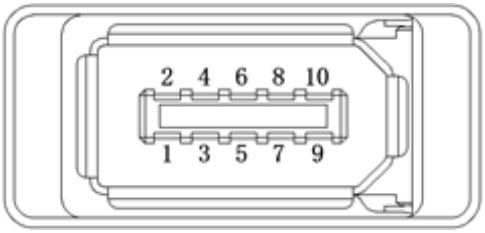

Pin	Signal	Description
1	5V	Power supply 5V
2	GND	Power supply ground
3	A+	Phase A+ pulse input
4	A-	Phase A- pulse input
5	B+	Phase B+ pulse input
6	B-	Phase B- pulse input
7	Z+	Phase Z+ pulse input
8	Z-	Phase Z- pulse input
Frame	FG	Shield grounding


External encoder pulse input

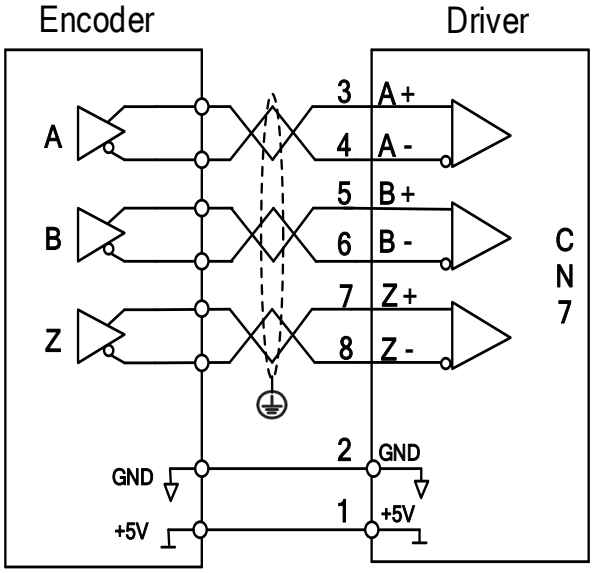

Please connect the encoder reference ground terminal to driver ground terminal.
Recommended to use double winding cable with shielding foil, Connect the shielding foil to CN7 connector to reduce noise interference.
External encoder input method: Differential input


4.12 USB Type-C Tuning Port

E-DHAS□□P series servo driver can be connected to PC for performance tuning, data monitoring and parameters modifying using a **USB Type-C data cable**. Can be done without the servo driver connecting to main power supply.

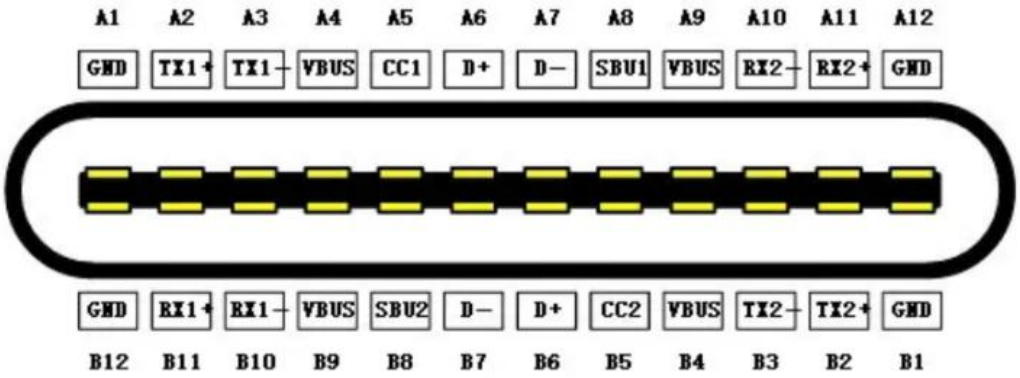

Port	Pin	Signal	Description
USB Type-C	A4, B4, A9, B9	VCC 5V	Power supply positive terminal 5V
	A12, B12, A1, B1	GND	Power supply negative terminal
	A6, B6	D+	USB data positive terminal
	A7, B7	D-	USB data negative terminal
	Frame	USB_GND	Ground through capacitor

PC Turning Port Wiring Example

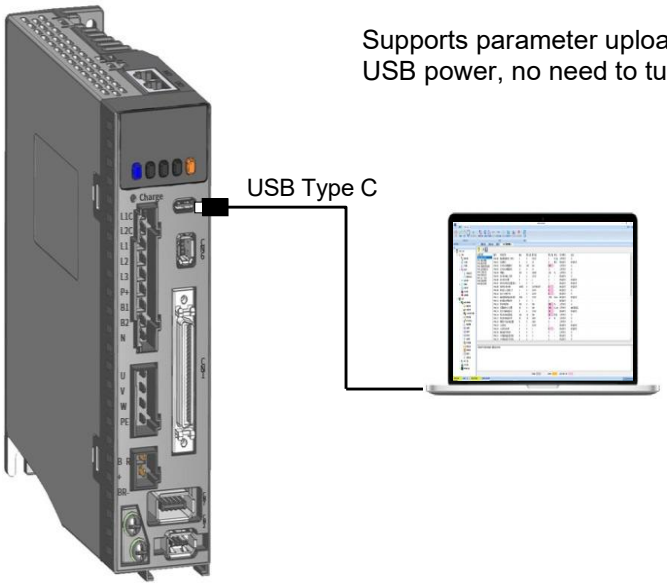

Supports parameter upload and download using only USB power, no need to turn on main power.

4.13 I/O Signals

4.13.1 Pulse Input Circuit

When PLC or Motion Controller command pulse output circuits can be divided into 2 categories, namely differential output or open collector. Hence, on the side of servo driver, there are 2 types of command pulse input method as well: Differential drive input and open collector input.

Pulse input frequency:

1. High speed pulse input (4MHz)
2. Low speed pulse input (200kHz/500kHz)


Pulse input frequency can be set in P00.05.

Pulse		Max. Frequency	Min pulse width(μs)
Low speed	Differential	500k	1
	Open collector（Single ended）	200k	2.5
High speed differential		4M	0.125

High-/low speed pulse cannot be used at the same time.
If output pulse width is smaller than min pulse width, error might occur at pulse receiving end.

5V differential drive input (Low Speed)


5V differential drive input (max. tolerable command input pulse frequency = 500kHz), input voltage of 3-6V with 50% duty ratio.
This input method will not be easily affected by noise with better delivery accuracy. Pin 3 and 4 of CN1 are for pulse signal input; pin 5 and 6 are for direction signal input.

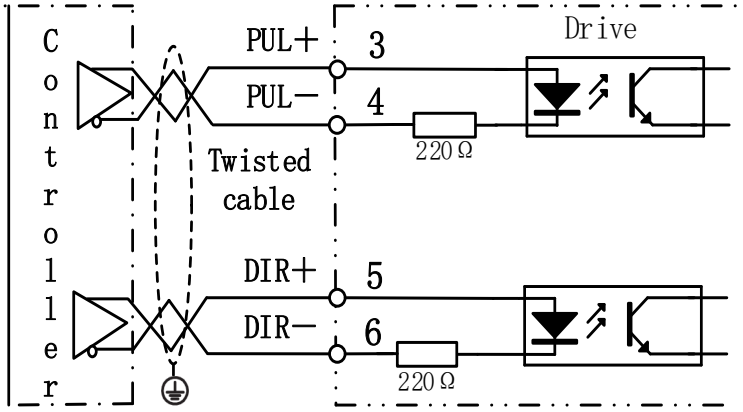

Single ended open collector drive input (Low Speed)

Max. tolerable command pulse input frequency under open collector = 200kHz. Input voltage of 12-24V with 50% duty ratio.
Using 24V external power supply, driver internal includes current limitation equivalent to VDC value. By installing a resistor, driver's noise tolerance will be improved.

Resistance of current limiting resistor = $\frac{VDC-1.5V(Voltage\ drop)}{R(Current\ limiting)+220\Omega}=10mA$.
If VDC = 24V, resistance of current limiting resistor approximates 2kΩ. (Rough estimation)

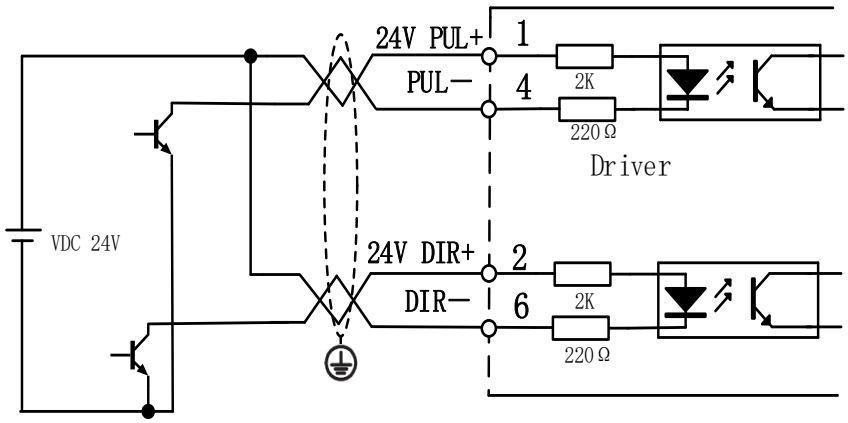


5V differential drive method is recommended for accurate delivery of pulse data.
E-DHAS□□P series servo driver supports 5V differential drive and 24V single ended open collector drive, different connection pins for both methods.
External power supply needs to be provided externally when using single ended open collector drive method. Please note that reversed polarity might cause damage to the servo driver.

5V differential drive input (High Speed)

5V differential drive input (Max. tolerable command pulse input frequency: 500kHz). Due to high-speed pulse input, it is highly recommended to use shielded cable and be isolated from power cable.

High speed pulse input, Pulse position command: 4MHz(Max) Differential

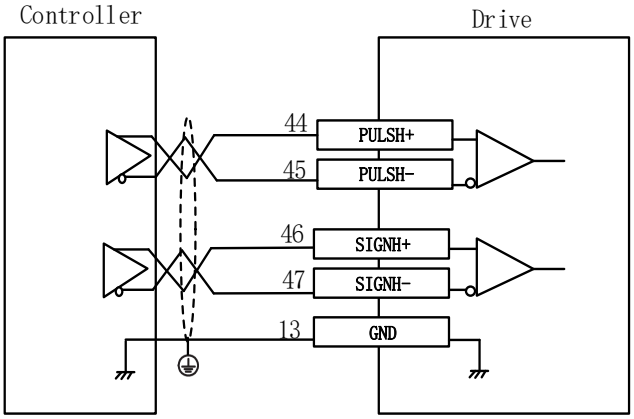

Please make sure that differential input is 5V or it might cause instability of input pulse.
Pulse lost during command pulse input
Inversed pulse direction during direction command
Please connect 5V signal to GND on driver to lower noise interference.


4.13.2 Analogue Input Circuit

Analogue input signal

E-DHAS□□P series servo drivers support 3 analogue input (1 differential, 2 single ended)


CN1 Pin	Signal	Description
14	AI1+	Analogue input 1, differential, Input voltage: ±10VDC, input resistance: 20KΩ
15	AI1-	
16	AI2	Analogue input 2, single ended, Input voltage: ±10VDC, input resistance: 20KΩ
18	AI3	Analogue input 3, single ended, Input voltage: ±10VDC, input resistance: 20KΩ
17	AGND	Analogue GND

AI1: Differential; AI2/AI3: Single ended
Max tolerable input voltage for each AI is ±10VDC. If variable resistor (VR) or resistor (R) is used, please refer to the following circuit diagram.

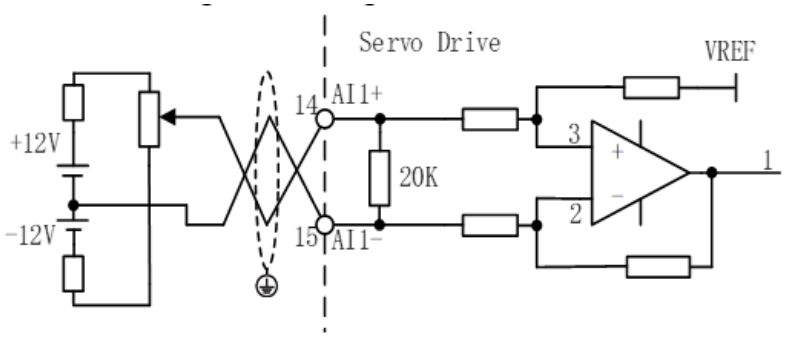

Analogue Output signal

E-DHAS□□P series servo drivers support 2 analogue outputs, output voltage: ±10VDC. Corresponding signals are set in P04.65/P04.70.

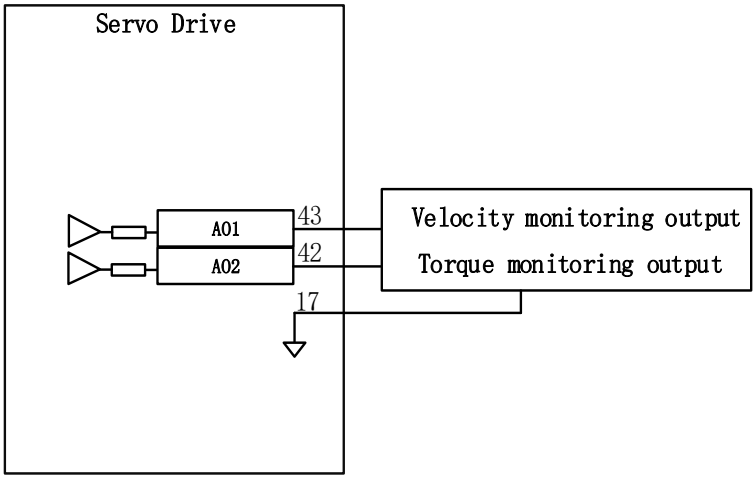


4.13.3 Digital Inputs


Using DI1 as an example (DI2-DI10 use the same input circuit). The internal circuit of common input is a bidirectional optocoupler which supports common anode and common cathode configurations. There are 2 types of outputs from master device: Relay output and Open Collector output as shown below.

① Output from master device: Relay

Common anode:

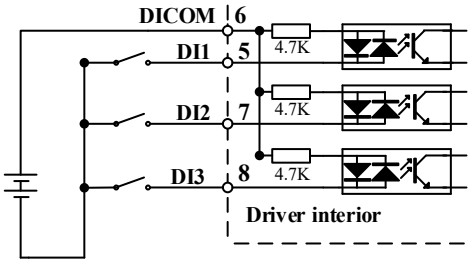


Common cathode:

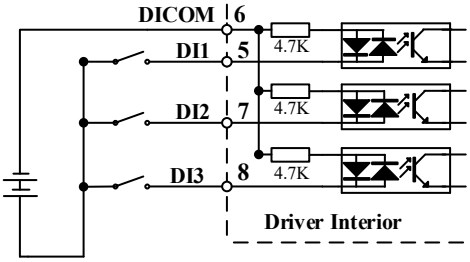


② Output from master device: Open Collector

NPN configuration:

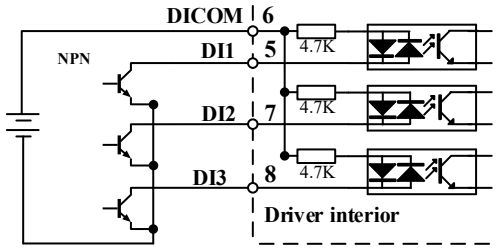

PNP configuration:

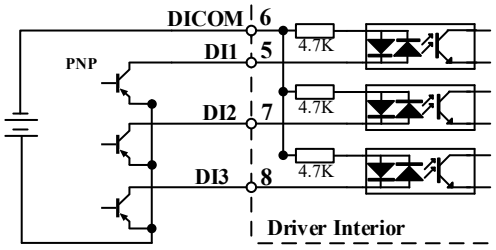


Please prepare switching power supply with output of 12-24VDC, current≥ 100mA;


4.13.4 Digital Outputs

There are total of 8 digital outputs with DO5/DO6 as single ended outputs. Both of these outputs are connected to COM of control signal source, which means both use the same control signal source. DO1-DO4 are double ended outputs. They can be connected to independent control signal source, and reference ground can be different from other single ended output signals.

Double ended outputs DO1-DO4

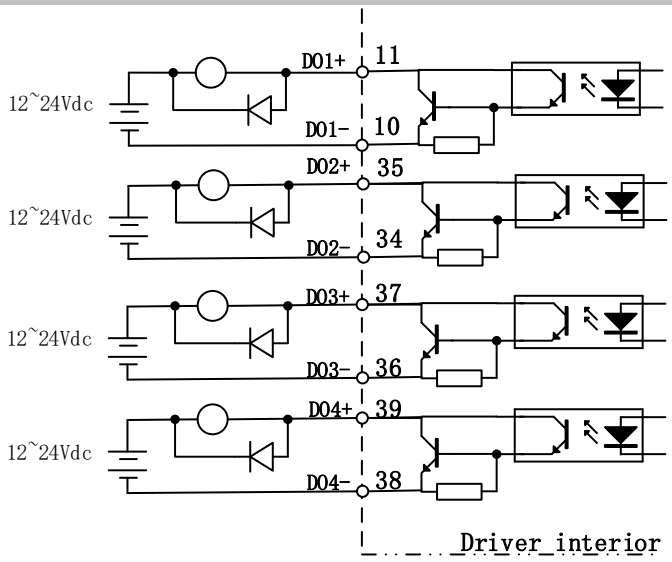

Single ended output DO5-DO6

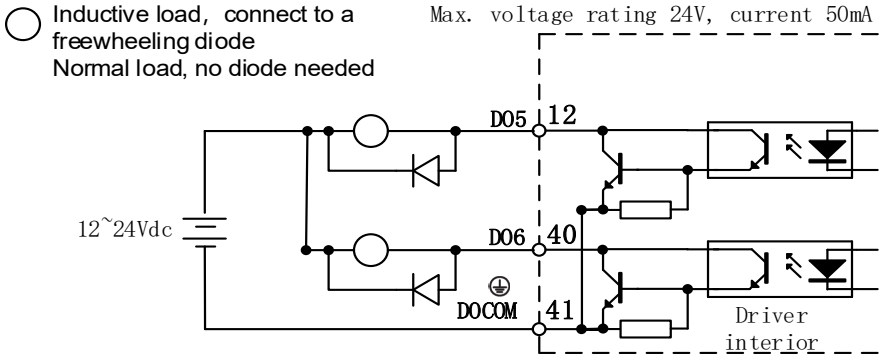

- External power supply needs to be provided. Reversed connection of power supply might cause damage to the driver.
- When output = open collector, max current 50mA, external power supply max voltage 25V. Hence, DO loads need to satisfy these conditions. If excessive or output is connected directly to power supply, it might cause damage to the driver.
- If the load is an inductive load such as a relay, please install freewheeling diodes on both ends of the load in parallel. If the diode is connected in reverse, it might cause damage to the driver.
- Pin 12, 40 and 31: 2 single ended output. Pin 11, 10 and 35, 34, Pin 37, 36 and 39, 38: double ended outputs.

4.13.5 Encoder Frequency Divider Output Circuit


E-DHAS□□P series frequency divider output: Differential and open collector

Pin	Label	Description	
21	A+	Motor encoder A-phase crossover frequency output	Differential, High≥2.5VDC, Low≤0.5VDC, Max current±20mA
22	A−		
48	B+	Motor encoder B-phase crossover frequency output	
49	B−		
23	Z+	Motor encoder Z-phase crossover frequency output	
24	Z−		
19	OCZ	Motor encoder Z-phase signal OC output	Only supports NPN type OC output
25	GND	Open collector signal ground	

Encoder frequency divider output (Differential)

Encoder signal after frequency division will go through differential driver to deliver differential output. Feedback signal will be provided if the master device is in position control mode. Please install a differential optocoupler receiving circuit to receive the signals.


A terminal resistor must be installed between differential input circuits. Resistance of the resistor as per actual use.

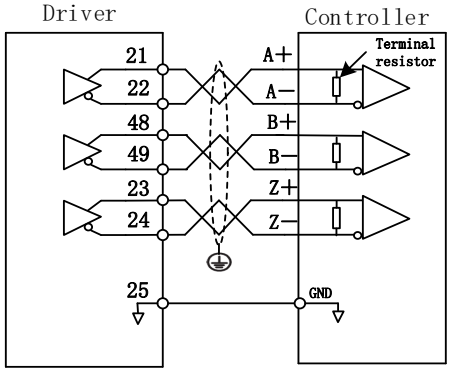

If a differential receiving circuit instead an optocoupler is used on the controller side, please connect pin 30 (GND) to GND of differential receiving circuit.

Encoder frequency divider output (Open Collector)

Encoder signal after frequency division will be delivered through an open collector output.

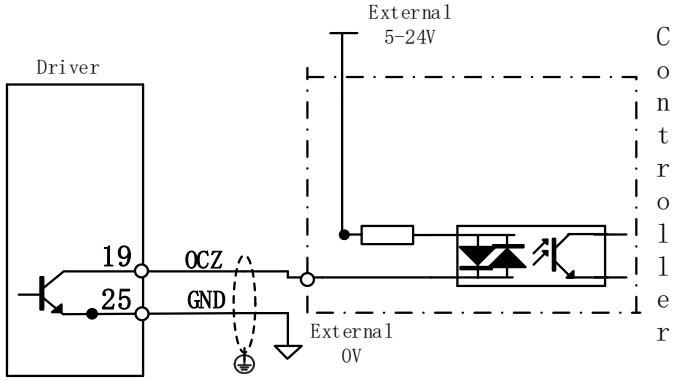

Please connect driver frequency divider signal GND to GND of external power supply. Use shielded twisted pair cable to lower noise interference.

4.13.6 Set DI Signals

CN1 PIN	Signal	Parameter	Default signal	Default status
7	DI-COM	-	Common input	
8	DI1	P04.00	NOT	Normally open
9	DI2	P04.01	POT	Normally open
26	DI3	P04.02	Null	Normally open
27	DI4	P04.03	GAIN	Normally open
28	DI5	P04.04	DIV1	Normally open
29	DI6	P04.05	SRV-ON	Normally open
30	DI7	P04.06	CL	Normally open
31	DI8	P04.07	A-CLR	Normally open
32	DI9	P04.08	C-MODE	Normally open
33	DI10	P04.09	INH	Normally open

NC: Signal NOT connected to DI-COM -> Invalid (OFF)
Signal connected to DI-COM -> Valid (ON)
NO: Signal NOT connected to DI-COM -> Valid (ON)
Signal connected to DI-COM -> Invalid (OFF)

Safety precautions

- When limit switch or emergency stop is used, POT, NOT and E-STOP signal will be normally closed (NC) by default. Please make sure there is no safety concern if these signals need to be set to normally open (NO).
- Servo driver power on signal (SRV-ON) is set as normally open (NO) as default. Please make sure there is no safety concern if this signal needs to be set to normally close (NC).
- If the same function is assigned to multiple pins, Er210 might occur.

Control DI settings

Signal	Symbol	Value	
		NO	NC
Invalid	—	0	-
Positive limit switch	POT	1	81
Negative limit switch	NOT	2	82
Servo enabled	SRV-ON	3	83
Clear alarm	A-CLR	4	-
Control mode switching	C-MODE	5	85
Gain switching	GAIN	6	86
Clear deviation count	CL	7	-
Command pulse prohibited	INH	8	88
Torque limit switching	TL-SEL	9	89
Command frequency divider/multiplier switching	DIV1	C	8C
Internal command velocity 1	INTSPD1	E	8E
Internal command velocity 2	INTSPD2	F	8F
Internal command velocity 3	INTSPD3	10	90
Zero speed clamp	ZEROSPD	11	91
Velocity command sign	VC-SIGN	12	92
Torque command sign	TC-SIGN	13	93
Forced alarm	E-STOP	14	94
Vibration suppression 1	VS-SEL1	0A	8A
Vibration suppression 2	VS-SEL2	0B	8B

CN1 PIN	Input	Parameters
8	DI1	P04.00
9	DI2	P04.01
26	DI3	P04.02
27	DI4	P04.03
28	DI5	P04.04
29	DI6	P04.05
30	DI7	P04.06
31	DI8	P04.07
32	DI9	P04.08
33	DI10	P04.09

Please don't set anything other than listed in the table above.
Normally open (NO): Valid when input = ON
Normally close (NC): Valid when input = OFF
Er210 might occur if same function is allocated to different channels at the same time

Servo enabled（SRV-ON）has to be allocated to enabled servo driver.

Inputs related to Pr-mode:

Signal	Symbol	Value	
		NO	NC
Trigger command	CTRG	20	A0
Home	HOME	21	A1
Forced stop	STP	22	A2

Signal	Symbol	Value	
		NO	NC
Positive JOG	PJOG	23	A3
Negative JOG	NJOG	24	A4
Positive limit	PL	25	A5
Negative limit	NL	26	A6
Origin	ORG	27	A7
Path address 0	ADD0	28	A8
Path address 1	ADD1	29	A9
Path address 2	ADD2	2A	AA
Path address 3	ADD3	2B	AB

Note: CTRG, HOME are edge triggered, please make sure electronic bits last 1ms or above.

Configurable Input Signal

Label	Servo enabled			Mode	P	S	T
Signal	SRV-ON	Default assignment	29(DI6)	I/O circuit	3.14.3 Digital inputs		
	·Servo enabled (Motor ON/OFF control signal)						

Label	Positive position limit			Mode	P	S	T
Signal	POT	Default assignment	9(DI2)	I/O circuit	3.14.3 Digital inputs		
	To prevent axis from travelling in positive direction Signal valid when P05.04 is set. If P05.04 is set to any value besides 1, POT signal is invalid when axis moves in positive direction.						
Label	Negative position limit			Mode	P	S	T
Signal	NOT	Default assignment	8(DI1)	I/O circuit	3.14.3 Digital inputs		
	To prevent axis from travelling in negative direction Signal valid when P05.04 is set. If P05.04 is set to any value besides 1, NOT signal invalid when axis moves in negative direction.						

Label	Clear deviation count			Mode	P		
Signal	CL	Default assignment	30(DI7)	I/O circuit	3.14.3 Digital inputs		
	To clear position deviation counter. Only clear once by default. Please modify on P05.17.						

Label	Clear alarm			Mode	P	S	T
Signal	A-CLR	Default assignment	31(DI8)	I/O circuit	3.14.3 Digital inputs		
	To clear alarm. Only some of the alarms can be cleared.						

Label	Command pulse prohibited			Mode	P		
Signal	INH	Default assignment	33(DI10)	I/O circuit	3.14.3 Digital inputs		
	Ignore position command pulse Please set in P05.18 when needed When INH input is valid, position command from controller will deviate from servo driver internal command after filtering, which might cause the loss of position info before INH input. Please reset before taking any further action requiring position management.						

Label	Control mode switching			Mode	P	S	T
Signal	C-MODE	Default assignment	32(DI9)	I/O circuit	3.14.3 Digital inputs		
	When P00.01 = 3,4,5, control mode: hybrid mode, which consists of 2 control modes. All control modes require this signal. Please set to the same logic when in position, velocity or torque mode to prevent error from occurring. When C-MODE is valid, select 2nd mode; when invalid, select 1st mode. Please do not enter any command 10ms before and after mode switching.						

Label	Command frequency divider/multiplier switching			Mode	P		
Signal	DIV1	Default assignment	28(DI5)	I/O circuit	3.14.3 Digital inputs		

	When DIV1 is valid, frequency divider/multiplier numerator and denominator switch to 2nd command frequency divider/multiplier numerator and denominator. When DIV1 input is valid, position command from controller will deviate from servo driver internal command after filtering, which might cause the loss of position info before DIV1 input. Please reset before taking any further action requiring position management.

Label	Vibration suppression 1			**Mode**	**P**	
Signal	VS-SEL1	**Default assignment**		**I/O circuit**	3.14.3 Digital inputs	
Label	Vibration suppression 2			**Mode**	**P**	
Signal	VS-SEL2	**Default assignment**		**I/O circuit**	3.14.3 Digital inputs	
	To switch frequency used in vibration suppression					

Label	Gain switching			**Mode**	**P**	**S**
Signal	GAIN	**Default assignment**	27(DI4)	**I/O circuit**	3.14.3 Digital inputs	
	To switch between 1st and 2nd gain					

Label	Torque limit switching			**Mode**	**P**	**S**
Signal	TL-SEL	**Default assignment**		**I/O circuit**	3.14.3 Digital inputs	

To switch between 1st and 2nd torque limit. Please refer to P05.21

Value		Limit
【0】		1st torque limit P00.13
1		2nd torque limitP05.22
2	TL-SEL OFF	P00.13
	TL-SEL ON	P05.22
3~4		Reserved
5		P00.13 →Positive torque limit P05.22 →Negative torque limit

Label	Zero speed clamp			**Mode**	**S**
Signal	ZEROSPD	**Default assignment**		**I/O circuit**	3.14.3 Digital inputs
	To set velocity command to 0 When in use, please set P03.15 ≠ 0.				

Label	Velocity command sign			**Mode**	**S**
Signal	VC-SIGN	**Default assignment**		**I/O circuit**	3.14.3 Digital inputs
	Sign of velocity command input in velocity control mode. Please refer to P03.01				

Label	Torque command sign			**Mode**		**T**
Signal	TC-SIGN	**Default assignment**		**I/O circuit**	3.14.3 Digital inputs	

Sign of torque command input in torque control mode. Please refer to P03.18

Value	Direction settings
【0】	Torque command input「Positive」→Positive direction、 「Negative」→Negative direction
1	Use TC-SIGN ON/OFF status for torque direction OFF: *Positive direction* ON: *Negative direction*


Label	Internal command velocity 1			**Mode**	**S**
Signal	INTSPD1	**Default assignment**		**I/O circuit**	3.14.3 Digital inputs
Label	Internal command velocity 2			**Mode**	**S**
Signal	INTSPD2	**Default assignment**		**I/O circuit**	3.14.3 Digital inputs
Label	Internal command velocity 3			**Mode**	**S**
Signal	INTSPD3	**Default assignment**		**I/O circuit**	3.14.3 Digital inputs

·Connect to the right DI to control internal command velocity settings.


Value	Velocity settings
0	Analog - Velocity command（SPR）
【1】	Internal velocity settings 1st – 4th speed（P03.04～P03.07）
2	Internal velocity settings 1st – 3rd speed（P03.04～P3.06）、Analog velocity command（SPR）
3	Internal velocity settings 1st – 8th speed（P03.00～P03.11）

Value	Internal command velocity 1（INTSPD 1）	Internal command velocity 2（INTSPD2）	Internal command velocity 3（INTSPD3）	Velocity command
1	OFF	OFF	No effect	1st speed
	ON	OFF		2nd speed
	OFF	ON		3rd speed
	ON	ON		4th speed
2	OFF	OFF	No effect	1st speed
	ON	OFF		2nd speed
	OFF	ON		3rd speed
	ON	ON		Simulated speed
3	Similar to P03.00=1		OFF	1st – 4th speed
	OFF	OFF	ON	5th speed
	ON	OFF	ON	6th speed
	OFF	ON	ON	7th speed
	ON	ON	ON	8th speed

Please change internal command velocity as per diagram below as unexpected axis movement might occur if 2 command velocities are changed at the same time.

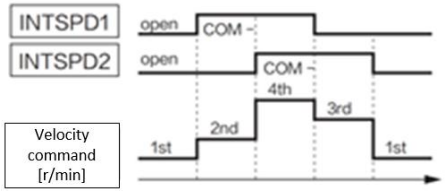

P03.00=1 / 2

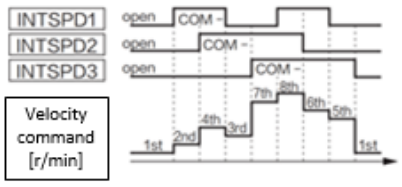

P03.00=3

Signal input configurable only in PR mode

Label	Trigger command			Mode	PR
Signal	CTRG	Default assignment		I/O circuit	3.14.3 Digital inputs
	Select path address ID through ADD0-3, then trigger PR path motion using CTRG Set rising edge/double edge trigger in Pr8.00.				

Label	Path address 0-3			Mode	PR
Signal	ADD0-3	Default assignment		I/O circuit	3.14.3 Digital inputs

IO combination trigger select path using ADD0~ADD3. Trigger mode is set in Pr8.26.

ADD3	ADD2	ADD1	ADD0	Path selection
OFF	OFF	OFF	OFF	Path 0 (Non-action)
OFF	OFF	OFF	ON	Path1
OFF	OFF	ON	OFF	Path2
OFF	OFF	ON	ON	Path3
OFF	ON	OFF	OFF	Path4
OFF	ON	OFF	ON	Path5
OFF	ON	ON	OFF	Path6
OFF	ON	ON	ON	Path7
ON	OFF	OFF	OFF	Path8
ON	OFF	OFF	ON	Path9
ON	OFF	ON	OFF	Path10
ON	OFF	ON	ON	Path11
ON	ON	OFF	OFF	Path12
ON	ON	OFF	ON	Path13
ON	ON	ON	OFF	Path14
ON	ON	ON	ON	Path15

Label	Home			**Mode**	**PR**
Signal	HOME	**Default assignment**		**I/O circuit**	3.14.3 Digital inputs
	Homing trigger, homing velocity and acceleration can be set in Pr8.15-Pr8.18				

Label	Forced stop			**Mode**	**PR**
Signal	STP	**Default assignment**		**I/O circuit**	3.14.3 Digital inputs
	Emergency stop trigger in PR motion. Deceleration can be set in Pr8.23				

Label	Positive/Negative JOG			**Mode**	**PR**
Signal	PJOG/NJOG	**Default assignment**		**I/O circuit**	3.14.3 Digital inputs
	To jog manually in PR mode				
Label	Positive/Negative limit			**Mode**	**PR**
Signal	PL/NL	**Default assignment**		**I/O circuit**	3.14.3 Digital inputs
	PR mode positive/negative position limit				

Label	Origin			**Mode**	**PR**
Signal	ORG	**Default assignment**		**I/O circuit**	3.14.3 Digital inputs
	Origin signal input				

4.13.7 Set DO Signals

Default DO signal assignments

CN1 PIN	Label	Parameter	Assigned signal
11	DO1+	P04.10	External brake released BRK-OFF
10	DO1-		
35	DO2+	P04.11	Servo-Ready S-RDY
34	DO2-		
37	DO3+	P04.12	Alarm（ALARM）
36	DO3-		
39	DO4+	P04.13	Positioning completed INP1
38	DO4-		
12	DO5	P04.14	Zero speed clamp detection ZSP
40	DO6	P04.15	Torque limit signal TLC

Control signal output settings

Value		Signal	Symbol
NO	NC		
00	80	Invalid	—
01	81	Alarm	ALARM
02	82	Servo-Ready	SRDY
03	83	External brake released	BRK-OFF
04	84	Positioning completed	INP
05	85	At-speed	AT-SPPED
06	86	Torque limit signal	TLC
07	87	Zero speed clamp detection	ZSP
08	88	Velocity coincidence	V-COIN
12	92	Servo Status	SRV-ST
15	95	Positive limit valid	POT-OUT
16	96	Negative limit valid	NOT-OUT
0B	8B	Position command ON/OFF	P-CMD
0F	8F	Velocity command ON/OFF	V-CMD
0D	8D	Velocity limit signal	V-LIMIT
14	94	Position comparison	CMP-OUT

CN1 PIN	Output	Parameters
11	DO1+	P04.10
10	DO1-	
35	DO2+	P04.11
34	DO2-	
37	DO3+	P04.12
36	DO3-	
39	DO4+	P04.13
38	DO4-	
12	DO5	P04.14
40	DO6	P04.15

- Same signal can be assigned to multiple different outputs.
- Err212 might occur if output is allocated to signals other than listed in the table above.

Outputs related to PR-mode

Signal	Symbol	Value	
		NO	NC
Command completed	CMD-OK	20	A0
Path completed	PR-OK	21	A1
Homing done	HOME-OK	22	A2

Configurable DO signals

Label	Alarm			Mode	P	S	T
Signal	ALARM	Default assignment	(D03)	I/O circuit	3.14.4 Digital outputs		
	Signal output when driver alarm occurs						

Label	Servo Ready			Mode	P	S	T
Signal	S-RDY	Default assignment	(D02)	I/O circuit	3.14.4 Digital outputs		
	Signal output when servo is powered on						

Label	Positioning completed			Mode	P		
Signal	INP	Default assignment	(D04)	I/O circuit	3.14.4 Digital outputs		
	Signal output when positioning completed within set range						

Label	External brake released			Mode	P	S	T
Signal	BRK-OFF	Default assignment	(D01)	I/O circuit	3.14.4 Digital outputs		
	Signal valid to hold braking action						

Label	Velocity reached			Mode		S	T
Signal	AT-SPEED	Default assignment		I/O circuit	3.14.4 Digital outputs		
	Velocity reached signal						

Label	Torque limit signal			Mode	P	S	T
Signal	TLC	Default assignment	(D06)	I/O circuit	3.14.4 Digital outputs		
	Torque limiting signal						

Label	Zero speed clamp detection			Mode	P	S	T
Signal	ZSP	Default assignment	(D05)	I/O circuit	3.14.4 Digital outputs		
	Zero speed clamp activation signal						

Label	Velocity coincidence			Mode		S	T
Signal	V-COIN	Default assignment		I/O circuit	3.14.4 Digital outputs		
	Signal output when velocity coincides.						

Label	Servo Status			Mode	P	S	T
Signal	SRV-ST	Default assignment		I/O circuit	3.14.4 Digital outputs		
	Signal output when servo is enabled.						

Label	Positive limit valid			Mode		S	T
Signal	POT-OUT	Default assignment		I/O circuit	3.14.4 Digital outputs		
	Signal output when positive position limit signal valid.						

Label	Negative limit valid			Mode		S	T
Signal	NOT-OUT	Default assignment		I/O circuit	3.14.4 Digital outputs		
	Signal output when negative position limit signal valid						

Label	Position command ON/OFF			Mode	P		
Signal	P-CMD	Default assignment		I/O circuit	3.14.4 Digital outputs		
	Signal valid when position command ON						

Label	Velocity command ON/OFF			Mode		S	
Signal	V-CMD	Default assignment		I/O circuit	3.14.4 Digital outputs		
	Signal valid when velocity command ON in velocity control mode						

Label	Position comparison			Mode	P		
Signal	CMP-OUT	Default assignment		I/O circuit	3.14.4 Digital outputs		
	When position comparison condition is satisfied, output according to selected method: Flip or pulse width output.						

DO signals configurable only in PR mode

Label	Command completed			Mode	PR
Signal	CMD-OK	Default assignment		I/O circuit	3.14.4 Digital outputs
	PR command is delivered but axis is not yet in position				

Label	Path completed			Mode	PR
Signal	PR-OK	Default assignment		I/O circuit	3.14.4 Digital outputs
	PR command delivered and axis in position				

Label	Homing done			Mode	PR
Signal	HOME-OK	Default assignment		I/O circuit	3.14.4 Digital outputs
	PR motion homing done.				

4.14 Measures Against Electromagnetic Interference

To reduce interference, please take the following measures:
I/O signal cable > 3m; Encoder cable > 20m
Use cable with larger diameter for grounding
①Grounding resistance > 100Ω
②When there are multiple drivers connected in parallel, PE terminal of the main power supply and ground terminal of servo drivers must be connected to copper ground bar in the electrical cabinet, and the copper ground bar needs to be connected to the metal frame of the cabinet.
Please install a line filter on main power supply cable to prevent interference from radio frequency.
In order to prevent malfunctions caused by electromagnetic interference, please take following measures:


① Install master device and line filter close to the servo driver

② Install surge suppressor for relay and contactor

③ Please separate signal/encoder cable from power cable with a space of at least 30cm

④ Install a line filter for the main power supply if a device with high frequency generation such as a welding machine exists nearby

4.14.1 Grounding Connection and Other Anti-Interference Wiring Connections

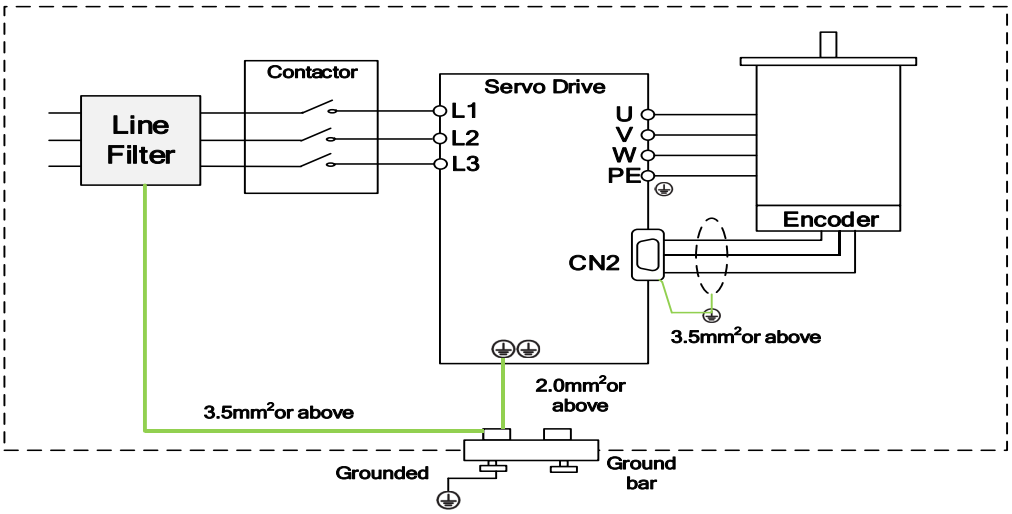


Servo motor frame should be grounded. Please connect the PE terminal of servo motor and servo driver and ground them together to reduce interference.
Ground both ends of the foil shield of encoder cable.


4.14.2 Using Line Filter

To reduce interference from main power supply cable and to prevent from affecting other sensitive components around the servo driver, please choose a line filter based on actual supply current. Please do be aware of the following mistake when installing a line filter.


Do not band the main power supply cable together.

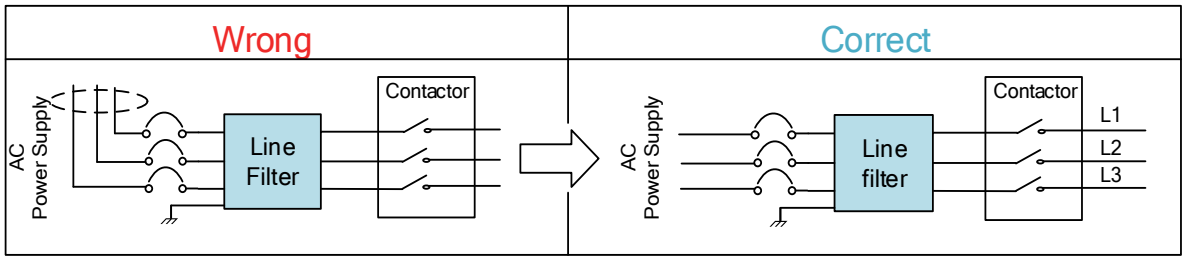

Separate the ground wire from the line filter and the main power supply cable.

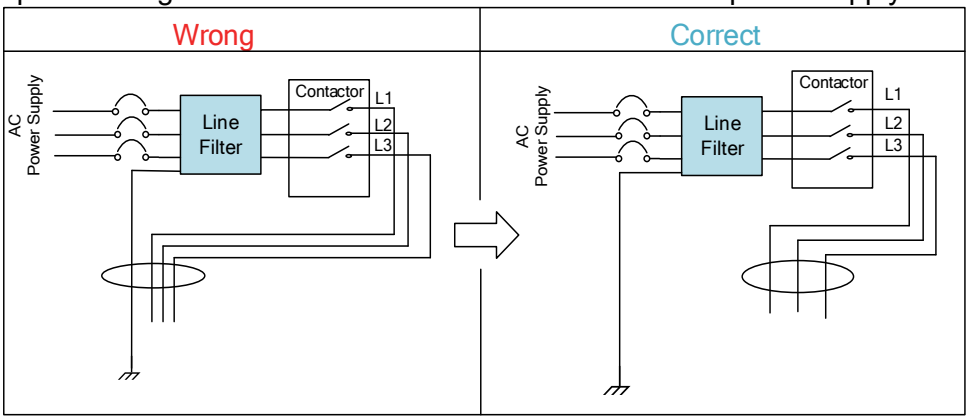


Ground wires inside an electrical cabinet

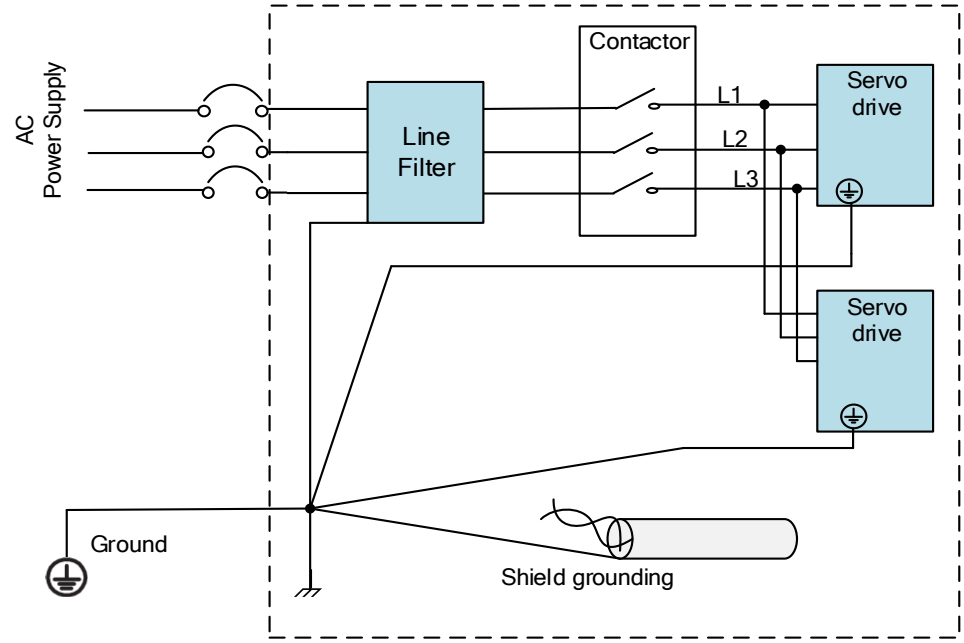

Chapter 5 Servo Driver Operation

5.1 Front Panel

Servo driver front panel consists of 5 push buttons, an 8-segments display and 5 green LED as warning indicators. Can be used for displaying status, alarms, functions, parameters setting and auxiliary functions.

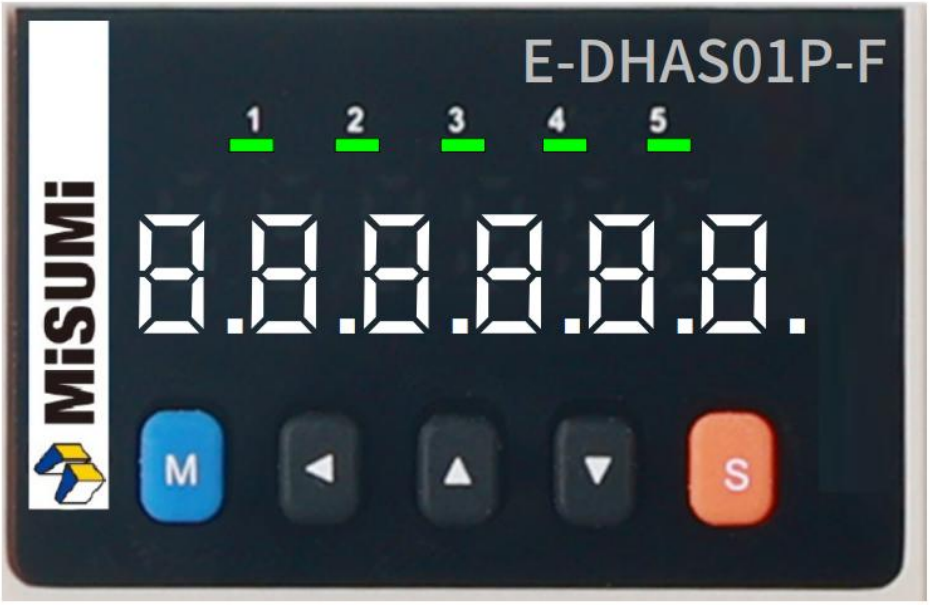


Front panel

Buttons and functions

Label	Symbol	Function
Display	/	Consists of 5 push buttons, an 8-segments display and 5 green LED as warning indicators
Mode	M	To switch between 3 modes: 1. Data monitoring mode: To monitor changes of motion data values 2. Parameters setting mode: To set parameters 3. Auxiliary functions mode: To operate common functions, such as trial run, alarm clearing
Enter	S	To enter or confirm
Up	▲	To switch between sub-menus / Increase
Down	▼	To switch between sub-menus / Decrease
Left	◄	To switch between values

5.2 Panel Display and Operation

5.2.1 Panel Operation

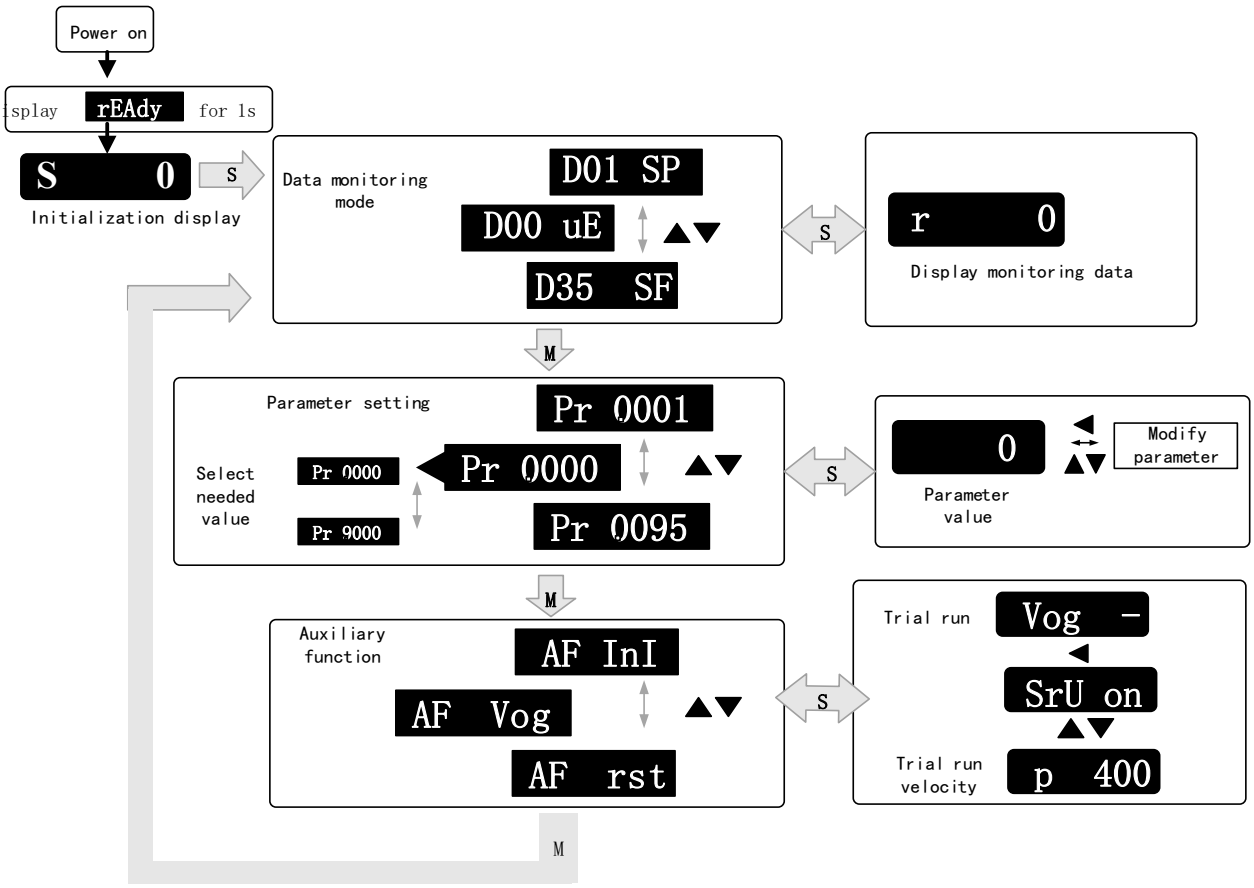

Flow diagram of panel operation

(1) **rEAdY** will be displayed for about 1 second after driver is powered on. Then, automatically enters data monitoring mode and displays initial data value. Otherwise, alarm code will be displayed if error occurs.

(2) Press **M** key to switch between modes.
Data monitoring mode → Parameters setting mode → Auxiliary functions mode
Alarm code will be displayed regardless of any mode if alarm occurs. Press **M** to switch to other modes.

(3) Press ▲or▼to select the type of parameters in data monitoring mode. Press **S** to confirm.

(4) Press◀ to select current segment in parameters settings mode. Press▲or▼to increase/decrease the value of segment. Press **S** to confirm the modified value(s) and save the parameters.

5.2.2 Front Panel Locking

To prevent any misuse of the front panel, it can be locked. Limitations when locked are as shown below.

Mode	Limitation
Data monitoring	Not limited
Parameters setting	Parameters can only be read, not modified.
Auxiliary functions	Not limited

To lock and unlock the front panel

	Front Panel	EDrive
Lock	①Set P05.35 = 1. ②Restart driver. ③Front panel is now locked.	
Unlock	① Please refer to auxiliary function AaF UnL ② Front panel is now unlocked.	① Set P05.35 = 0. ② Front panel is now unlocked.

5.2.3 Data Monitoring Mode

E-DHAS□□P series servo driver offers the function to monitor different types of data in data monitoring mode. After entering this mode, press **S** to monitor any data that starts with **d**. Press **S** again to get back to data monitoring mode and **M** to switch to any other modes.

Data list in data monitoring mode

No.	Label	Descriptions	Display	Unit	Data Format (x = numerical value)
0	d00uE	Position command deviation	d00uE	pulse	"xxxx"
1	d01SP	Motor velocity	d01SP	r/min	"r xxxx" – Motor actual velocity "F xxxx" – External encoder feedback velocity
2	d02CS	Position control command velocity	d02CS	r/min	"xxxx"
3	d03Cu	Velocity control command velocity	d03Cu	r/min	"xxxx"
4	d04tr	Actual feedback torque	d04tr	%	"xxxx"
5	d05nP	Feedback pulse sum	d05nP	pulse	"xxxx"
6	d06cP	Command pulse sum	d06CP	pulse	"xxxx"
7	d07	Maximum torque during motion	d07	/	"d xxxx" – Max torque % "V xxxx"- Average load ratio
8	d08FP	Internal command position sum	d08FP	pulse	"xxxx"
9	d09cn	Control mode	d09Cn	/	Position: "Ct PoS"

					Velocity: "**Ct SPd** " Torque: "**Ct trq**"
10	d10Io	I/O signal status	d10 Io	/	-
11	d11Ai	Analog input	d11Ai	V	-
12	d12Er	Alarm cause and record	d12Er	/	"**Er xxx**" Alarm code
13	d13rn	Warning	d13rn	/	"**H xxx**" Warning code
14	d14r9	Regeneration load factor	d14r9	%	"xxx"
15	d15oL	Overload factor	d15oL	%	"**L xxx**" – Motor overload % "**d xxx**" – Driver overload %
16	d16Jr	Inertia ratio	d16Jr	%	"xxx"
17	d17ch	Motor not running cause	d17Ch	/	"**CP xxx**" Error code
18	d18ic	No. of changes in I/O signals	d18ic	/	"xxx"
19	d19	Internal use	d19	/	" xxxx"
20	d20Ab	CSP position command sum	d20Ab	puls e	" xxxx"
21	d21AE	Single turn encoder data	d21AE	puls e	"**A xxxx**" – motor encoder single turn data "**F xxxx**" – external encoder single turn data
22	d22rE	Multiturn encoder data	d22rE	r	" xxxx"
23	d23 id	485 received frame	d23id	/	"id xxx" "Fr xxx"
24	d24PE	Position deviation	d24PE	Unit	"**A xxxx**" – Position deviation "**F xxxx**" – Full closed loop deviation (Command unit) "**H xxxx**" - Full closed loop deviation (Encoder unit)
25	d25PF	Motor electrical angle	d25PF	puls e	" xxxx"
26	d26hy	Motor mechanical angle	d26hy	puls e	" xxxx"
27	d27 Pn	Voltage across PN	d27Pn	V	" xxxx"
28	d28 no	Software version	d28no	/	"d xxx Servo software" "F xx Communication software" "p xxx Servo power rating" "C xx CPLD software"
29	d29AS	Internal usage	d29AS	/	"**A xxxx**" "**F xxxx**" – external encoder serial no.
30	d30NS	No. of times of encoder communication error	d30sE	/	"**A xxxx**" – Motor encoder communication error count "**F xxxx**" – External encoder communication error count
31	d31 tE	Accumulated uptime	d31tE	/	" xxxx"
32	d32Au	Automatic motor identification	d32Au	/	"r xxx Motor no." "E xxx Servo no."

33	d33At	Driver temperature	d33At	℃	"d xxx" – driver temperature "C xxx" – MCU temperature
34	d34	Servo status	d34	/	"xxx"
35	d35 SF	Internal usage	d35SF	/	"xxxxxx"
43	d43	External encoder Z-Phase counter	D43	/	"xxxxxx"
44	d44	External encoder pulse count per revolution	D44	puls e	"xxxxxx"
45	d45	External encoder direction	D45	/	"xxxxxx"
46	d46	Position compared to current position	D46	/	"xxxxxx"

Description of data monitoring function

When using the front panel to monitor data, data is divided in low/high bit and positive/negative.




High bit: 1st and 2nd values on the right has two decimal points
Low bit: 1st and 2nd values on the right has no decimal point.



Positive: 1st and 2nd values on the left has no decimal point.
Negative: 1st and 2nd values on the left has two decimal points


1. d00uE Position command deviation

Shows high bit and low bit of position deviation.

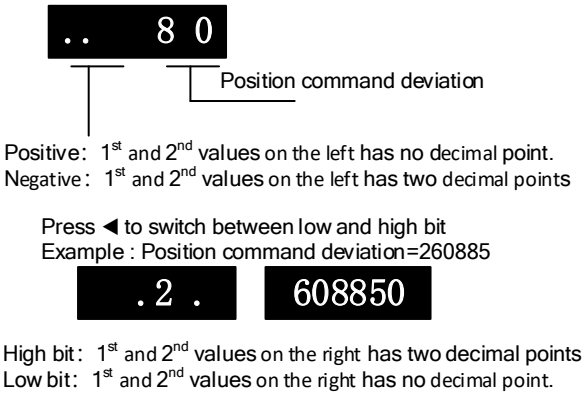


2. d01SP Motor velocity, d02CS Position control command velocity, d03CU Velocity control command velocity, d04 tr Actual torque feedback


d04 tr reflects actual current.

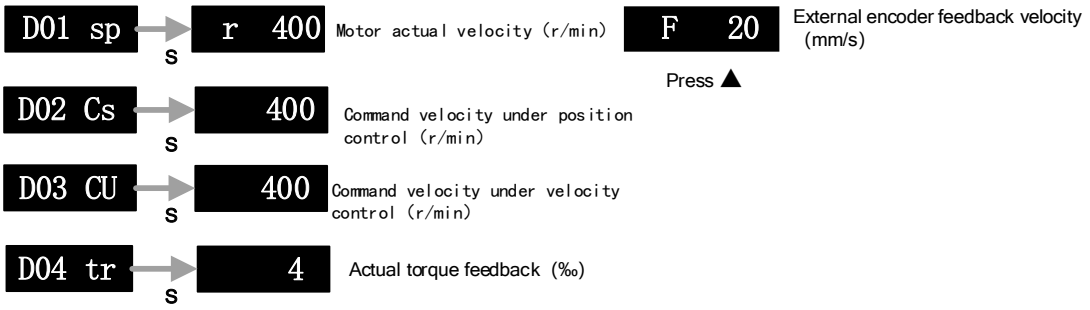


3. d05nP Feedback pulse sum d06CP Command pulse sum

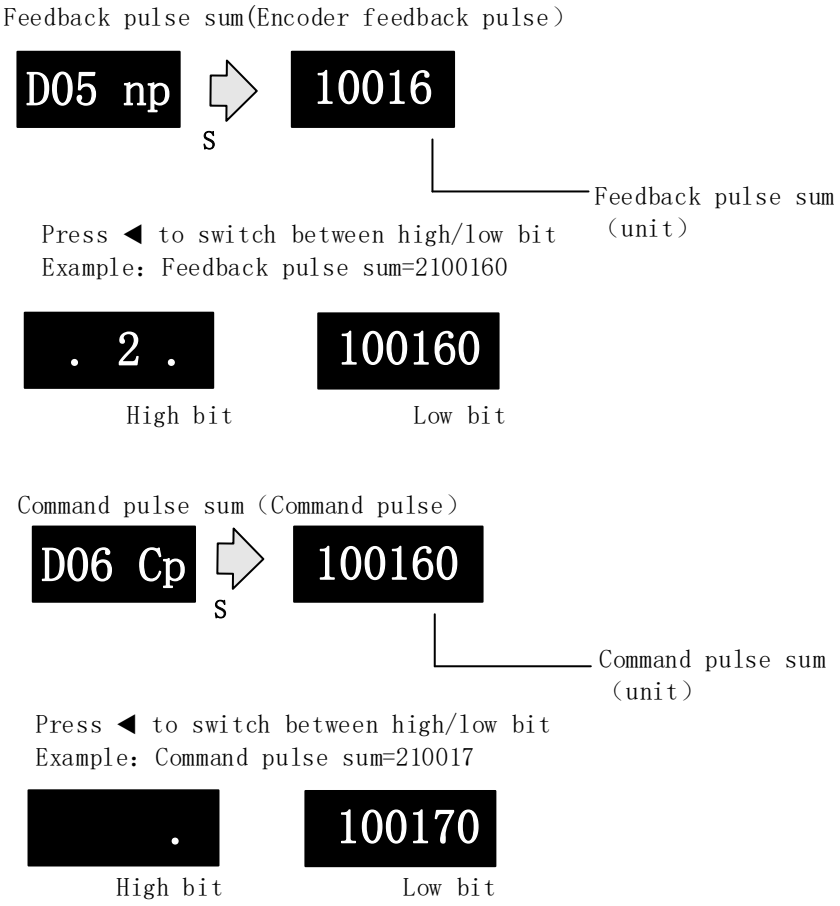


4. d07 Maximum torque during motion

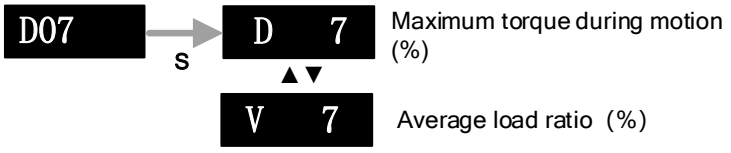

5. d08FP Internal command pulse sum

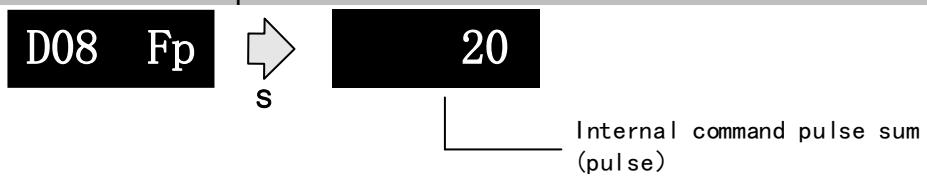

6. d09Cn Control mode

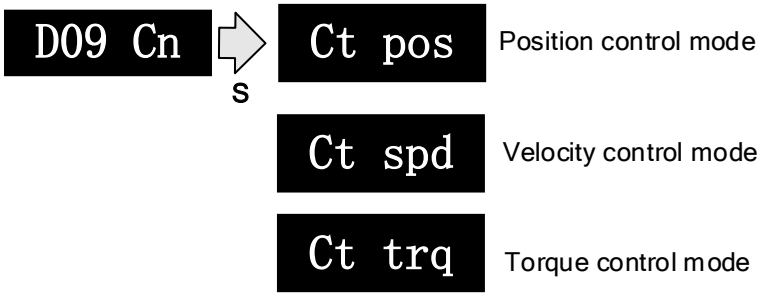


7. d10Io I/O signal status

When the top half of the digital tube is lighted, the signal is valid; when the bottom half of the digital tube is lighted, the signal is not valid. Decimal points represent I/O status, input when lighted, output when not lighted.


■ **Input:** From low to high bit (Right to left) DI1, DI2…. DI10. Decimal point is lighted to represent input signals.

In the example below, DI1, DI8 and DI10 input signal is valid; DI2-DI7, DI9 input signal is invalid.




■ **Output:** From low to high bit (Right to left) DO1, DO2….DO10. Decimal points are not lighted to represent output signals.

In the example below, DO1 output signal is valid; DO2-DO10 output signal is invalid.




8. d11Ai Analog input

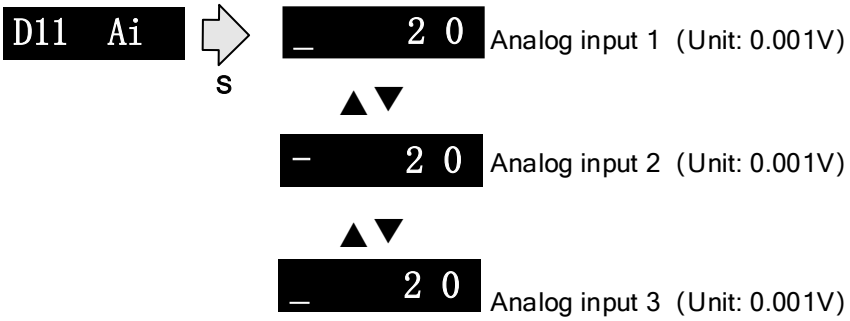

3 analog inputs can be monitored through d11. Left most bar at the top: 1st analog input; at the middle: 2nd analog input; at the bottom 3rd analog input. Points on 4th and 5th value means negative value.


9. d12Er Alarm cause and historical record

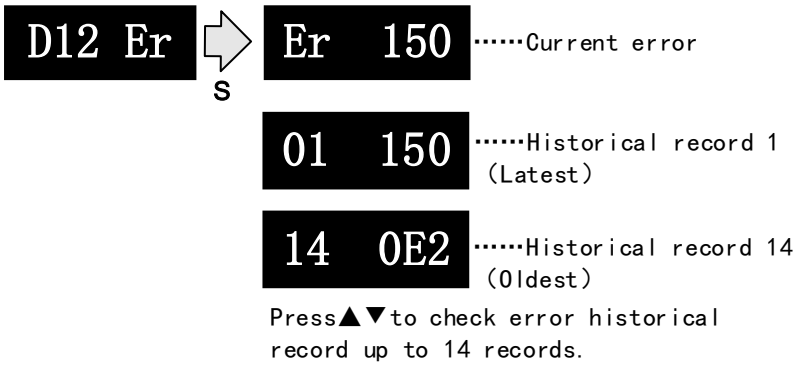


Please refer to the alarm list table in Appendix II for alarms that can be recorded.

10. d14rg Regenerative load factor d15oL Overload factor

Regenerative load factor（Er120 might occur, if the value increases indefinitely）

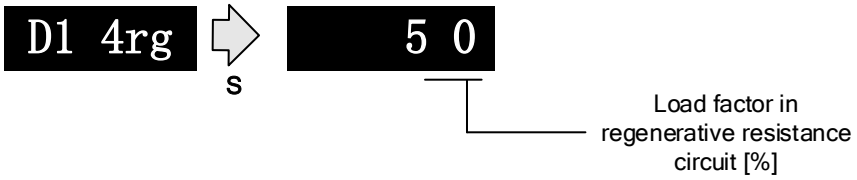

Overload factor（Er100 might occur, if d increases indefinitely
Er101 might occur, if L increases indefinitely）

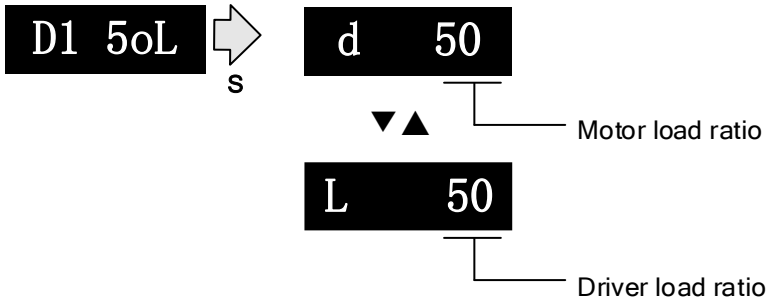


11. d16Vr Inertia ratio



Use auxiliary function **AF_GL** or EDrive to measure the inertia ratio. The result will be shown on **D1 6Vr**, hold M to write the value in P00.04.


12. d17Ch Motor not running cause

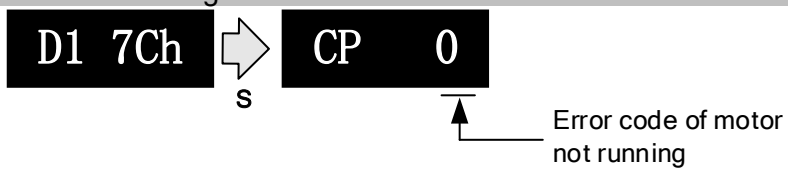


"d17Ch" Motor No Running Cause - Codes & Descriptions

Display Code	Description	Content
CP 0	Normal	
CP 1	DC bus undervoltage	Check if DC bus voltage is too low on D27
CP 2	No SRV-ON signal	Servo-ON input (SRV-ON) is not connected to COM-
CP 3	POT/NOT input valid	P05.04 = 0, POT is in open circuit, velocity command is in positive direction NOT is in open circuit, velocity command is in negative direction
CP 4	Driver alarm	/
CP 5	Relay not clicked	Check input voltage
CP 6	Pulse input prohibited (INH)	P05.18=0
CP 7	Position command too low	No command or too low
CP 8	CL valid	P05.17=0, deviation counter connected to COM-
CP 9	Zero speed clamp valid	Pr3.15 = 1, Zero speed clamp input is open

13. d21AE Single turn encoder data d22rE Multiturn encoder data

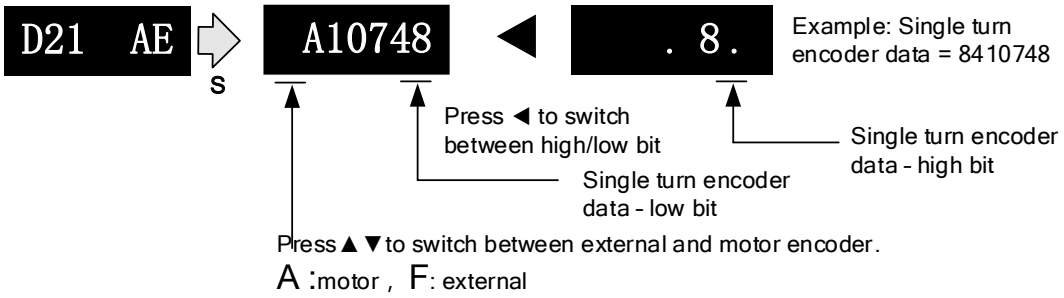


For 23-bit encoder, single turn encoder data = 0~8388607. Each value corresponds to certain position in a single revolution of the rotor, clockwise motion as negative, counterclockwise motion as positive. When counterclockwise single turn data > 8388607, multiturn data +1, clockwise single turn data < 0, multiturn data -1.

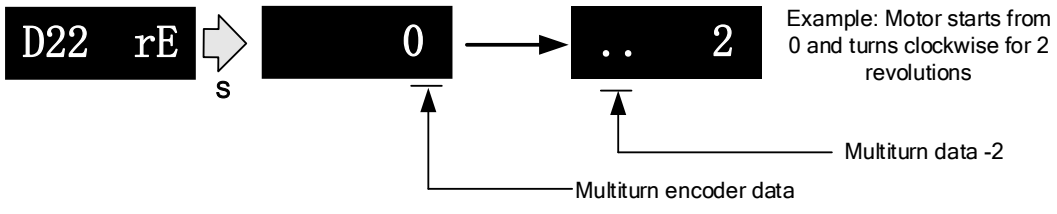


Multiturn encoder data range: -32768~+32767, As no. of revolution goes over range, 32767 will jump to -32768, -32767(counterclockwise); -32768 will jump to 32767, 32766 (clockwise)


14. d23id 485 received frame

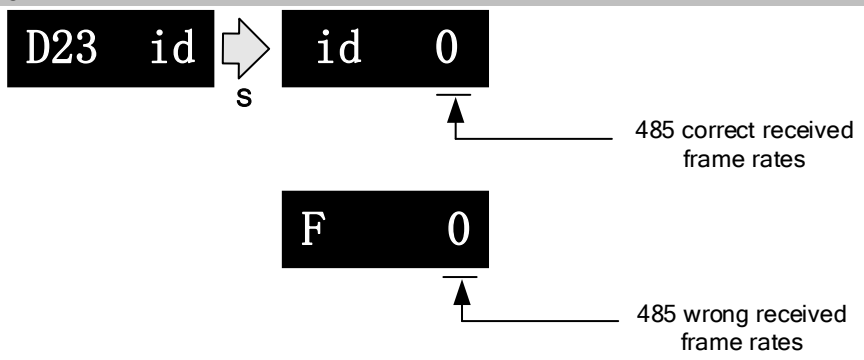


15. d24PE Position deviation

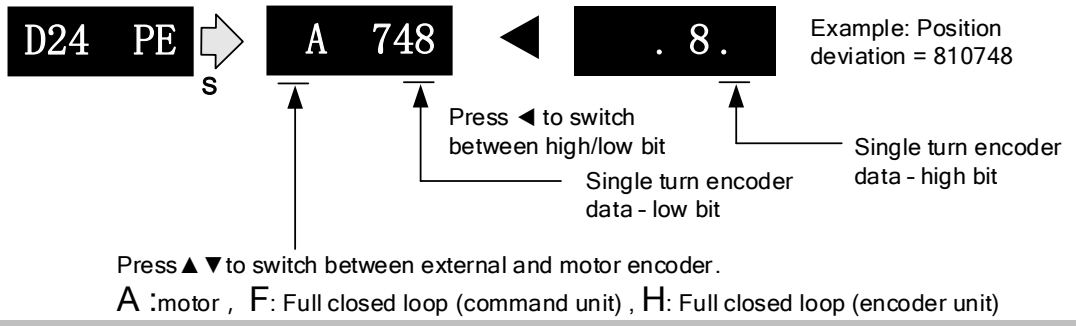


16. d27Pn DC bus voltage

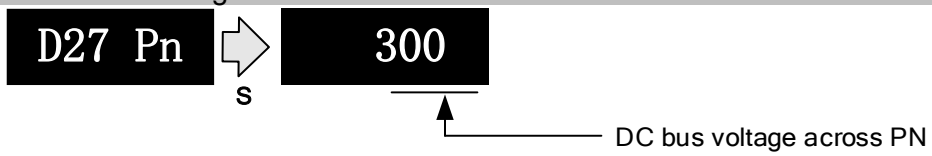

17. d28no Software version

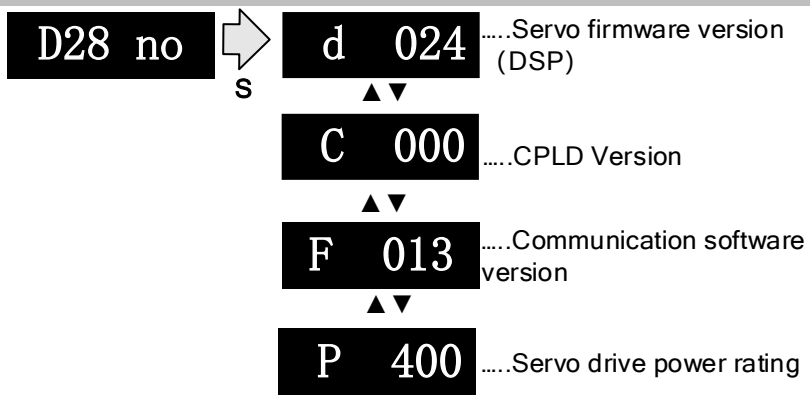


18. d31tE Accumulated operation time

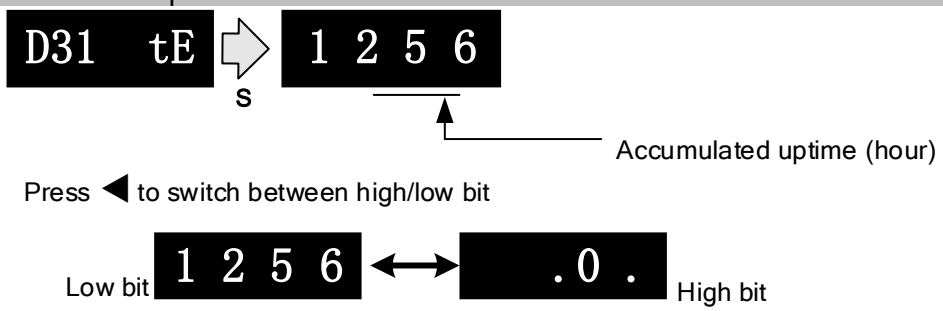

19. d34 Servo driver status display

Driver status: 402 state machine, EtherCAT communication, running mode, running.

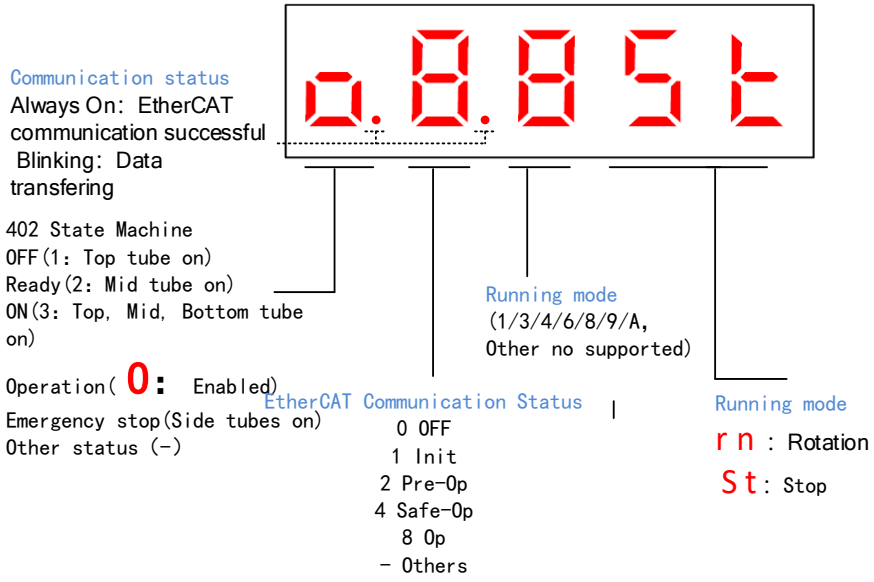

Display setting at power on


Default setting for initialization display settings at power on is **d34**, if any other display is required, please set on P05.28.
Please refer to P05.28 for any display content required on the front panel during initialization

P05.28	Label	LED initial status			Valid mode(s)	P	S	T
	Range	0~35	Unit	—	Default	1		
	Byte length	16bit	Attribute	R/W	485 address	0x0539		
	Valid	Immediate						

To set content display on front panel of the servo driver at servo driver power on.


Value	Status	Value	Status	Value	Status
0	Position deviation	14	Regenerative load rate	28	Software version
1	Motor speed	15	Overload rate	29	Internal usage
2	Position command deviation	16	Inertia load ratio	30	Encoder communication failure counts
3	Velocity control command	17	Cause(s) of non-rotation	31	Accumulated uptime
4	Actual feedback torque	18	No. of I/O changes	32	Internal usage
5	Feedback pulse sum	19	Internal usage	33	Driver temperature
6	Command pulse sum	20	Absolute encoder data	34	Servo status
7	Max. torque	21	Encoder single turn data	35	Internal usage
8	Position command frequency	22	Encoder multiturn data	43	External encoder Z-phase count
9	Control mode	23	485 receive frame	44	External encoder feedback pulse per revolution
10	I/O status	24	Encoder position deviation	45	External encoder direction
11	Analogue input	25	Internal usage	46	Current position comparison point
12	Alarm cause & history record	26	Internal usage		
13	Warning ID	27	PN Voltage		

5.2.4 Parameters Setting Mode

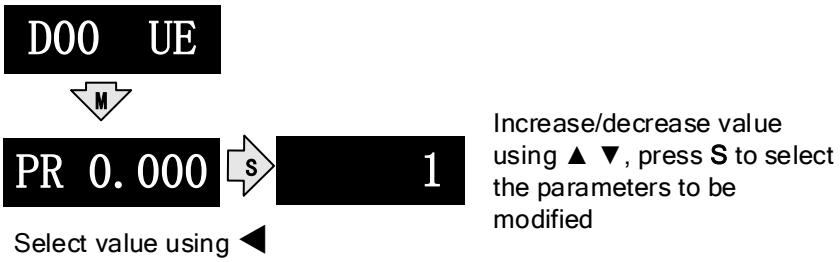


After modifying the selected parameter to desired values, press **S** to confirm and save the changes. If the parameter is modified but user does not want to save the changes, press **M** to exit without saving. Some parameter modifications will only take effect after the driver is restarted.

5.2.5 Auxiliary Function

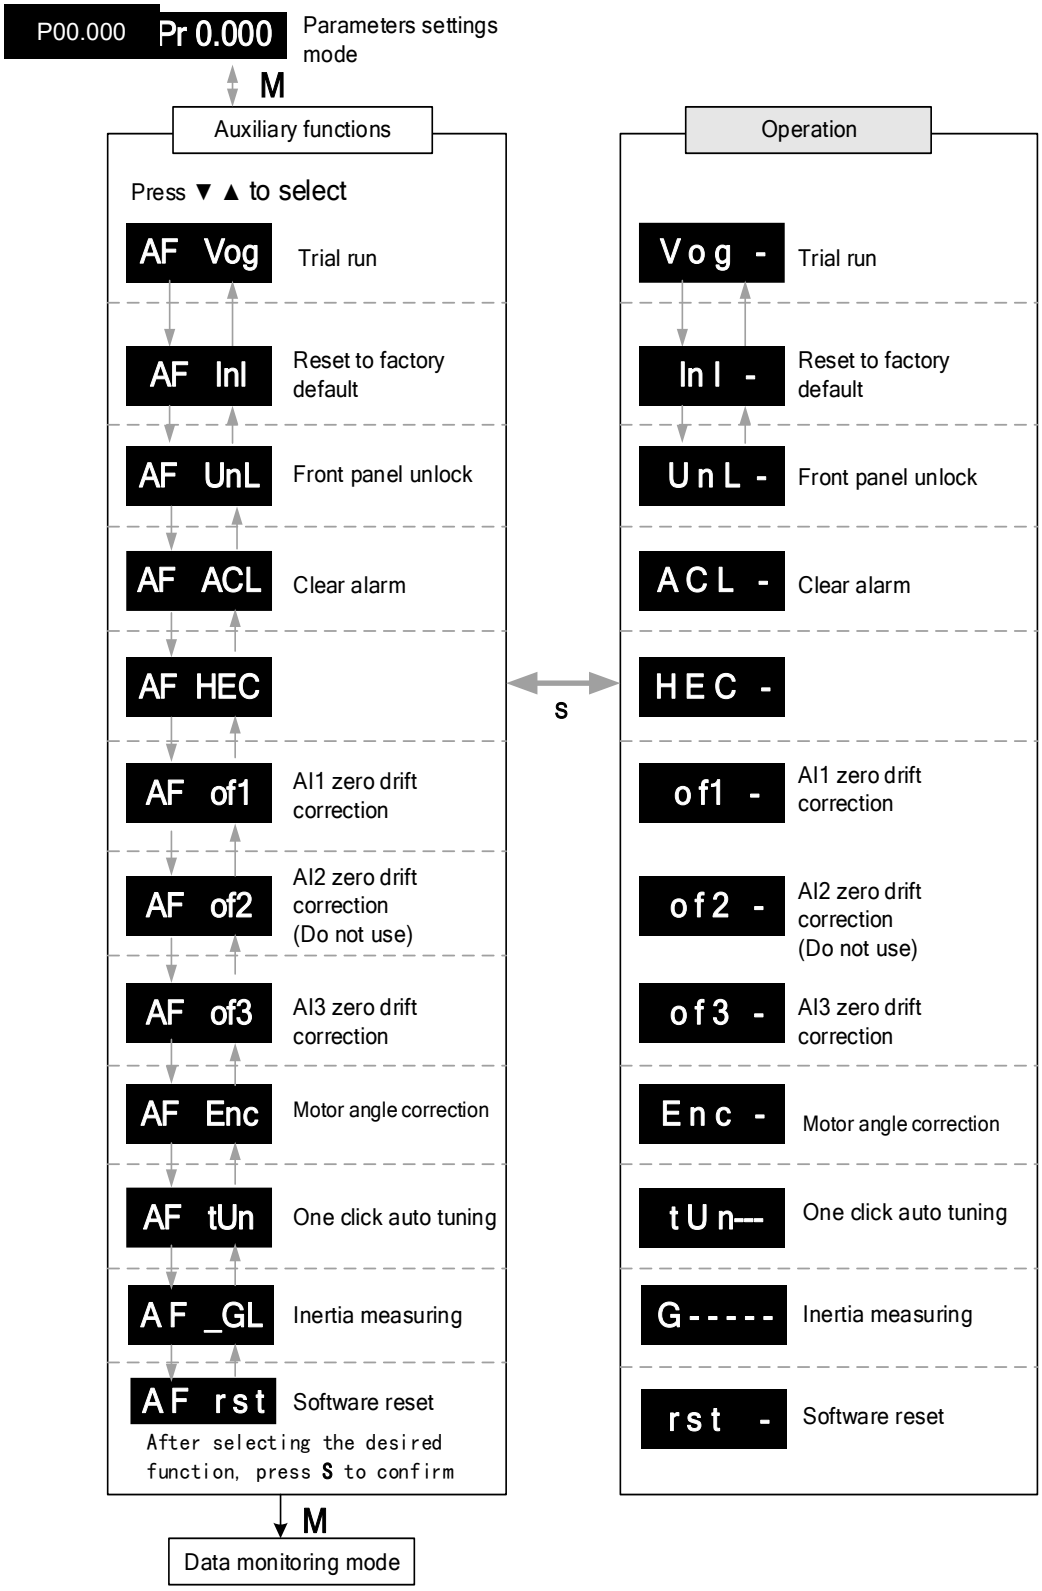


AF Jog Trial Run

- Please Disable Servo Driver Before Performing Any Trial Run.
- Please Don't Modify Gain Related Parameters During Trial Run To Prevent Any Occurrence of Mechanical Vibrations.
- Only Use Trial Run When P00.01 Set To 0, 1, 6.
- Please Check P06.04 (JOG Velocity) And P06.25 (JOG Acceleration) Before Running.
- Press **S** To Exit Trial Run.

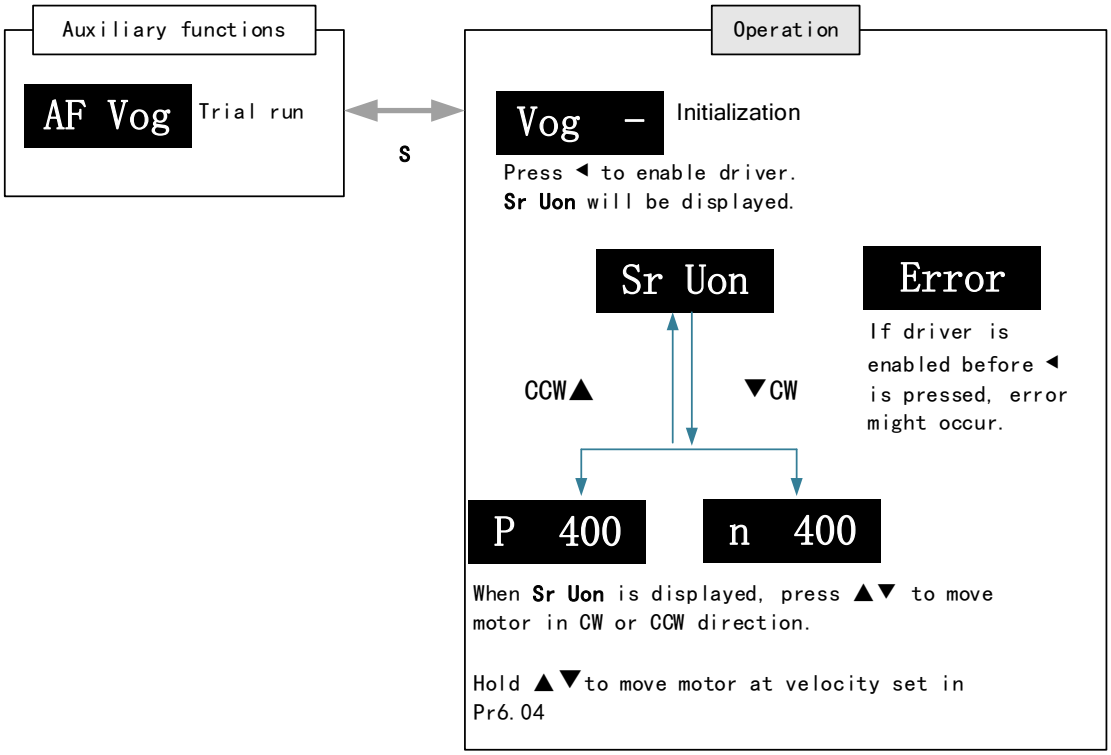


AF Inl Reset To Factory Default

To Reset Parameters Settings To Factory Default. Can Be Used To Reset Parameters Using Auxiliary Function On Front Panel Or Using Object Dictionary.

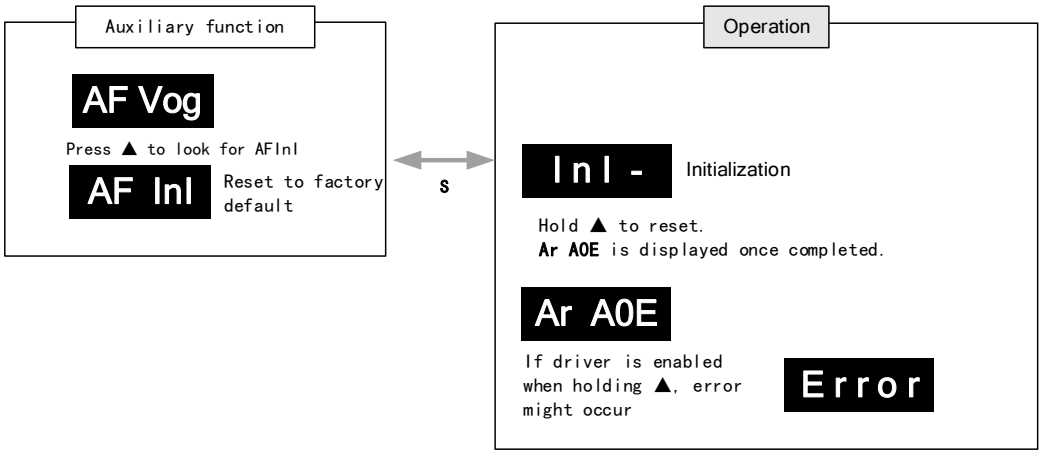


AF Unl Front Panel Unlock

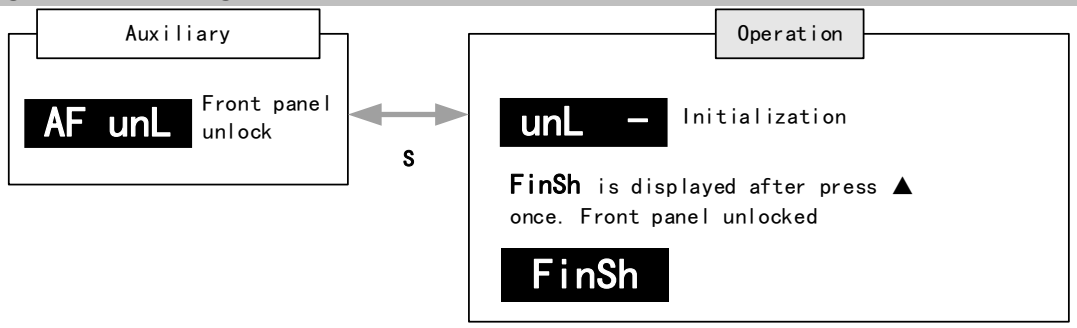

AF ACL Clear Alarm

Alarm Can Be Cleared Using This Auxiliary Function But Before That, The Error Needs To Be Solved And Driver Needs To Be Restarted.

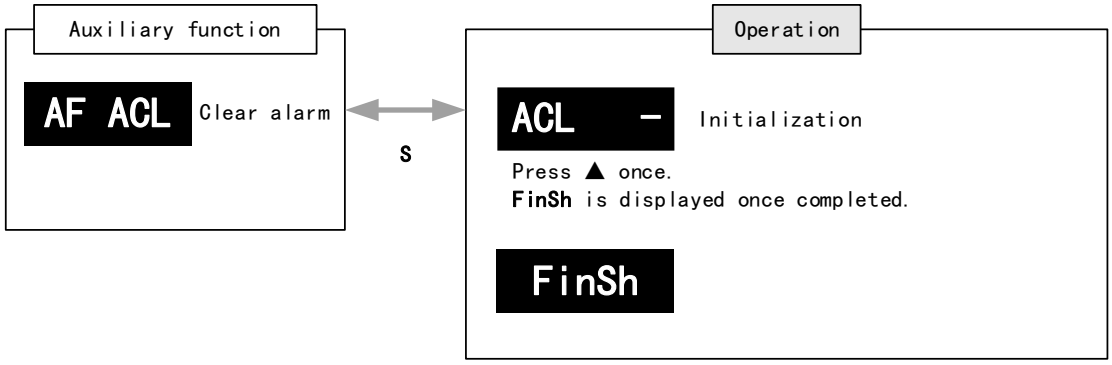


For Alarms That Can Be Cleared Using This Function, Please Refer To Table In Appendix II.


AF Of1 - AF Of3 Analog Input AI1-3 Zero Drift Correction

Auto Adjustment Of Analog Input Zero Drift Settings

Analog Input	Parameter (Zero Drift Settings)
AI1	P04.22
AI2	P04.25
AI3	P04.28

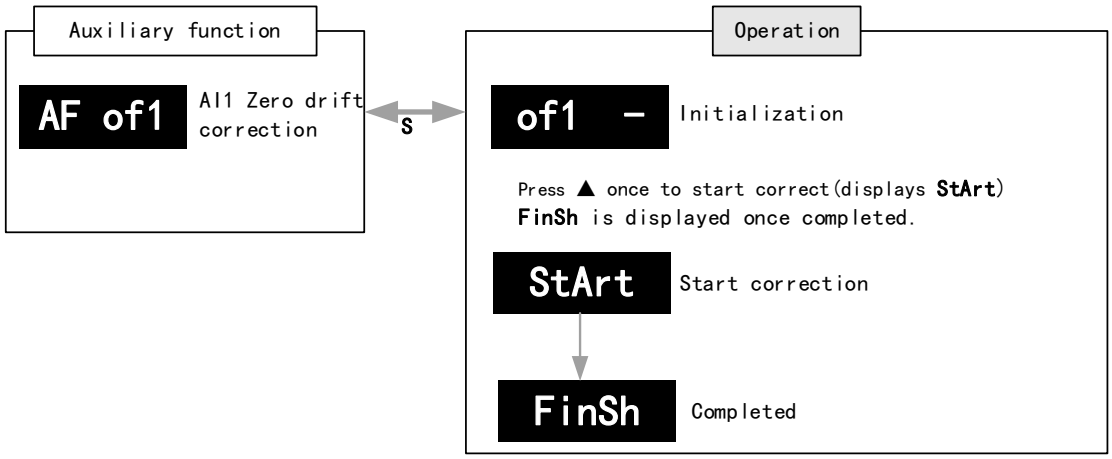

AF Enc Motor Angle Correction

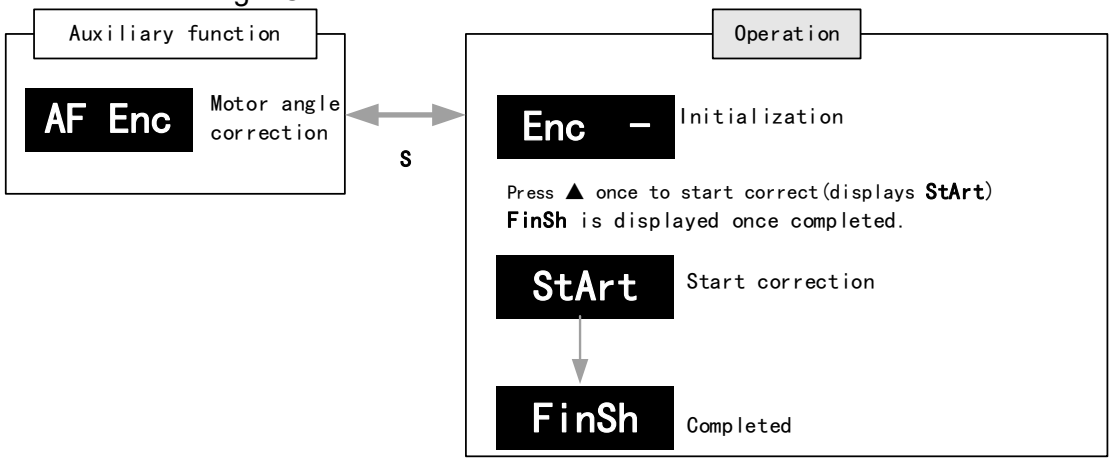


AF_GL Inertia Measuring

Please Make Sure:


1. Velocity < 300RPM, Average Velocity Duration < 50ms
2. Acceleration/Deceleration Time < 500ms

Press **S** To Exit And Disable The Driver Once Completed.

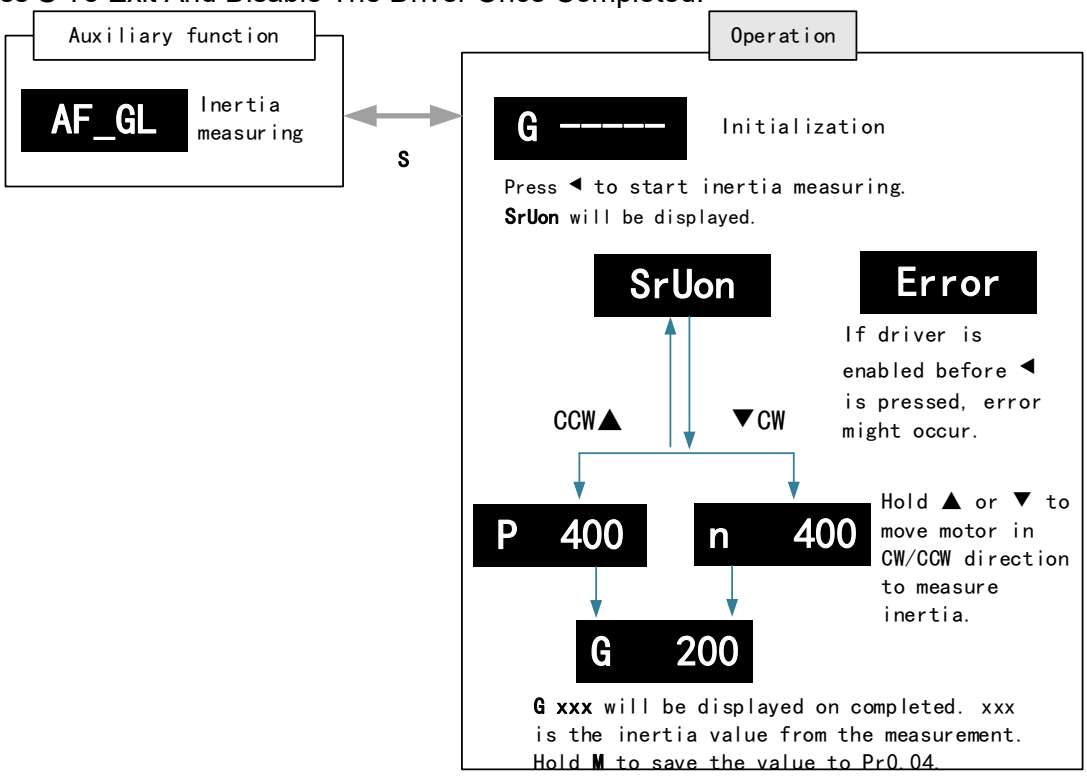


AF rSt Software Reset

Software Reset Is Used Mainly On Parameters Modification That Takes Effect Only After Driver Restarts.

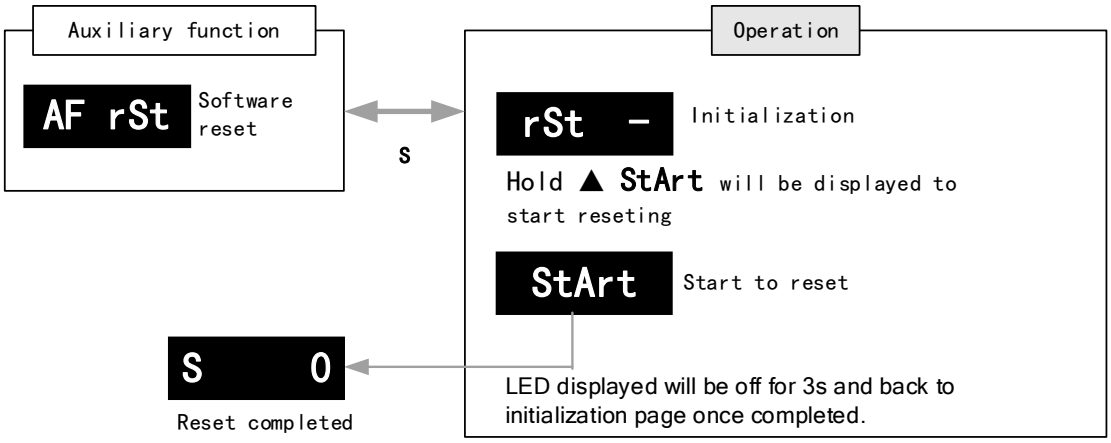

AF_tun One click auto tuning

One click auto tuning can be applied by operating the front panel. Set simple movement range and movement range has to be more than 0.5 motor revolution.

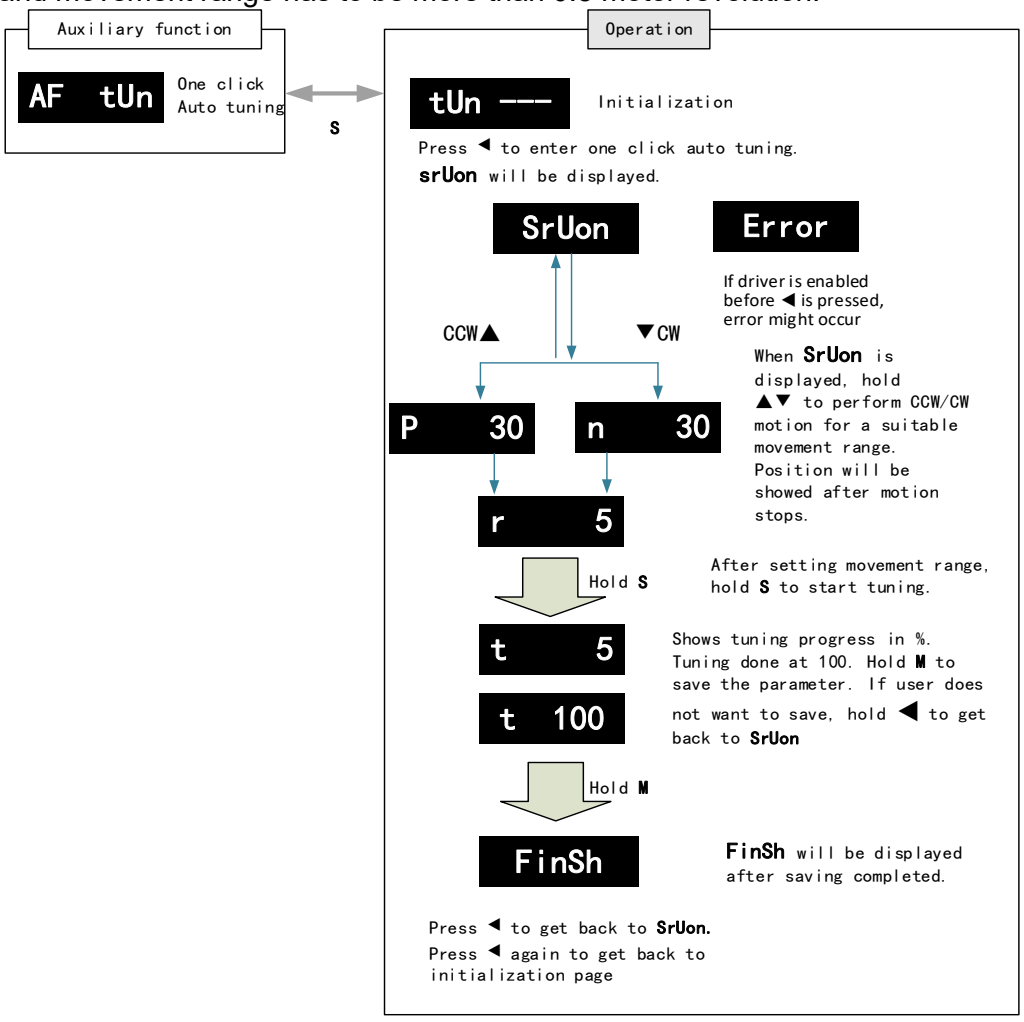

5.2.6 Abnormal Alarm

When a driver error occurs, the front panel will automatically switch to abnormal alarm display mode, showing the corresponding error code.

■ If the panel does not display anything, first check whether the main power supply voltage is faulty. If the power supply is within the correct range, the issue may be with the servo driver itself. Please consult MISUMI support staff.

■ For clearable alarms, you can use the alarm reset function in the auxiliary menu to clear the alarm. For non-clearable alarms, you must resolve the root cause and then power cycle the system to clear the alarm.

■ The servo stop method depends on the type of fault. Faults are categorized into Type 1 and Type 2, and the corresponding stop method is configured via parameter P05.10.


5.2.7 Parameter Saving

Parameter save mode, also known as EEPROM write mode, writes the changed data into the EEPROM. Parameters can be saved via the driver operation panel or via the object dictionary.

Saving parameters via driver operation panel

After modifying the parameters, simply press the "S" key briefly to write the parameters to the EEPROM.

5.2.8 Front Panel Warning Indicator

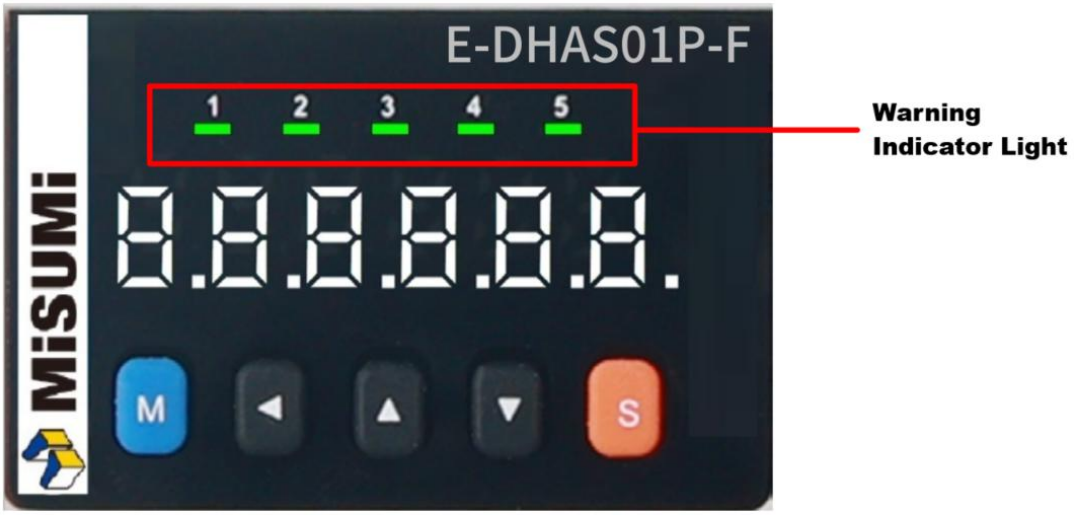

Warning indicator light status

1. Servo powered on but disabled: All 5 LEDs off
2. Servo powered on and enabled: All 5 LEDs lighted in cycles.
3. Warning status: All 5 LEDs lit in accordance with assigned signals. Please refer to the table below.

Warning indicator	Parameter	Assignment
LED 1	P04.74	
LED 2	P04.75	
LED 3	P04.76	
LED 4	P04.77	
LED 5	P04.78	

Set value	Signal
[0]	Null
1	Negative limit switch
2	Battery low voltage
3	Overload
4	Torque limit
5	Positive limit switch

5.3 Get Started with Driver Operation

5.3.1 Checklist Before Operation

No.	Description
Power supply	
1	The voltage of main and control circuit power supply is within rated values.
2	Power supply polarity is rightly connected.
Wiring	
1	Power supply input is rightly connected.
2	Driver's power output UVW matches UVW terminals on the main circuit.
3	No short circuit of driver's input and output UVW terminals.
4	Signal cables are correctly and well connected.
5	Drivers and motors are connected to ground
6	All cables under stress within recommended range.
7	No foreign conductive objects inside/outside the driver.
Mechanical	
1	Driver and external holding brake are not place near combustibles.
2	Installations of driver, motor and axis is fastened.
3	Movement of motors and mechanical axes are not obstructed.

5.3.2 Power On

Connect 220V power supply into main power supply R, S, T terminals and 220V power supply into control circuit power supply L1C, L2C. After power on, light indicator will light up and front panel will display **rEAdY**, then LED initial status will be displayed. Driver is ready for operation if no alarm occurs.

5.3.3 Trial Run

Servo driver must be disabled before performing trial run. For safety precautions, please JOG at minimal velocity.

Related Parameters

No.	Parameters	Label	Set value	Unit
1	P00.01	Control mode settings	0、1、6	/
2	P06.04	JOG trial run command velocity	User defined	r/min
3	P06.25	Trial run acc-/deceleration time	User defined	ms/1000rpm

- Please make sure the mechanical axis is within the range of motion and travelled distance should not be too long to avoid collision.
- Set optimal velocity and acceleration for trial run (not too high!)
- Do not modify any gain related parameters during motion to avoid vibration.

Please refer to "Section 5.6.5 Front Panel Trial Run" for detailed explanations on how to perform trial run using front panel operation. Or refer to EDrive user manual for details guide on how to perform trial run using EDrive.

5.3.4 Debugging Software

Our company provides free download and usage of the debugging software MISUMI EDrive via our website. When used with a debugging cable, one end connects to a PC and the other to the Type-C port of the servo driver, enabling communication between the PC and the servo driver.

Main Functions of MISUMI EDrive

- System Monitoring: Monitor the servo driver's operating status, alarms, and capture/save real-time operation data.
- Key modules include:
- Oscilloscope function
- Alarm display
- Status monitoring (corresponds to front panel motion data monitoring)
- Oscilloscope: Supports single/multi-frame high-precision sampling, overlapping waveforms, analog and digital channels, and dual cursors for waveform analysis.
- Auto Tuning: Automatically adjusts gain parameters based on simple operating condition settings.
- Parameter Management: Read and download all parameters from P00 to P09, load previously saved parameter files, modify and write parameters to the driver, save to EEPROM, and restore factory settings.
- IO Configuration: Configure or monitor IO signals via the IO settings interface, with support for forced IO input/output.
- Trial Run (JOG): Perform simple forward/reverse motor movements. Supports position and speed test runs.
- Inertia Identification: Identify load inertia through a series of actions and write the actual inertia ratio to P00.04 via parameter management.
- Mechanical Characteristic Analysis: Analyse the system’s resonance frequency and apply notch filters for improvement.
- Gain Adjustment: Adjust servo rigidity level and tuning method. In manual mode, individual parameters can be modified. In standard/real-time mode, predefined rigidity tables are used, and individual parameters cannot be changed.
- PR Motion Function: Plan up to 16 segments of single-axis motion, including homing, path movement, limit, and emergency stop functions.
- Position Comparison: Configure up to 42 position comparison points.
- Black Box: Read and analyse servo black box data using the debugging software.

Notes:

- Supports USB-powered connection to the driver, allowing parameter modification via MISUMI EDrive without external power.
- Recommended to use a Windows 10 PC.
- Serial port driver vendors no longer support Windows 7, which may cause disconnection after power cycling the driver.
- If using Windows 7, you may need to re-plug the debugging cable to reconnect.

5.3.5 Front Panel Trial Run

JOG Test Run (Jogging Control) Operation Procedure

Set all parameters related to jogging control.


1) After successfully writing the parameters, power off and restart the driver.
2) Ensure the driver is in a disabled state to enter JOG control mode.
3) Enter the “AF Jog” submenu under Auxiliary Functions Mode.
4) Press the SET key once — the display should show “Jog -”.
5) Press ◄ key once — if there are no issues, the display should show “SrUon”. If “Error” appears, press the ▲ key again — it should then show “SrUon”. If it still shows “Error”, switch to the “d17Ch” submenu under Data Monitoring Mode to check why the motor is not rotating. Troubleshoot the issue and retry.
6) In Position JOG Mode, once “SrUon” is displayed, hold the ▲ key to increase motor speed up to the maximum set in P06.04, and the motor will run forward continuously. Release the ▲ key to decelerate and stop — the display should return to “SrUon”. Hold the ▼ arrow key to run the motor in reverse at increasing speed up to P06.04. Release the ▼ key to decelerate and stop — the display should return to “SrUon”. If the motor does not rotate, check the “d17Ch” submenu in Data Monitoring Mode to identify the issue and retry after resolving it.
7) During the JOG test run, press the SET key to exit JOG control mode.

5.3.6 Trial Run Using Debugging Software

Use the MISUMI EDrive debugging software to perform test runs on the servo driver and motor.

Debugging Software Trial Run Procedure

1) Wiring Check:
   - Confirm correct wiring for power input and motor output.
   - Use a Type-C cable to connect the servo driver to the PC for communication.
2) Confirm Power Supply Voltage, ensure it is within the rated range.
3) After establishing communication between the PC and the driver, open the test run function in MISUMI EDrive. The test run interface will appear.

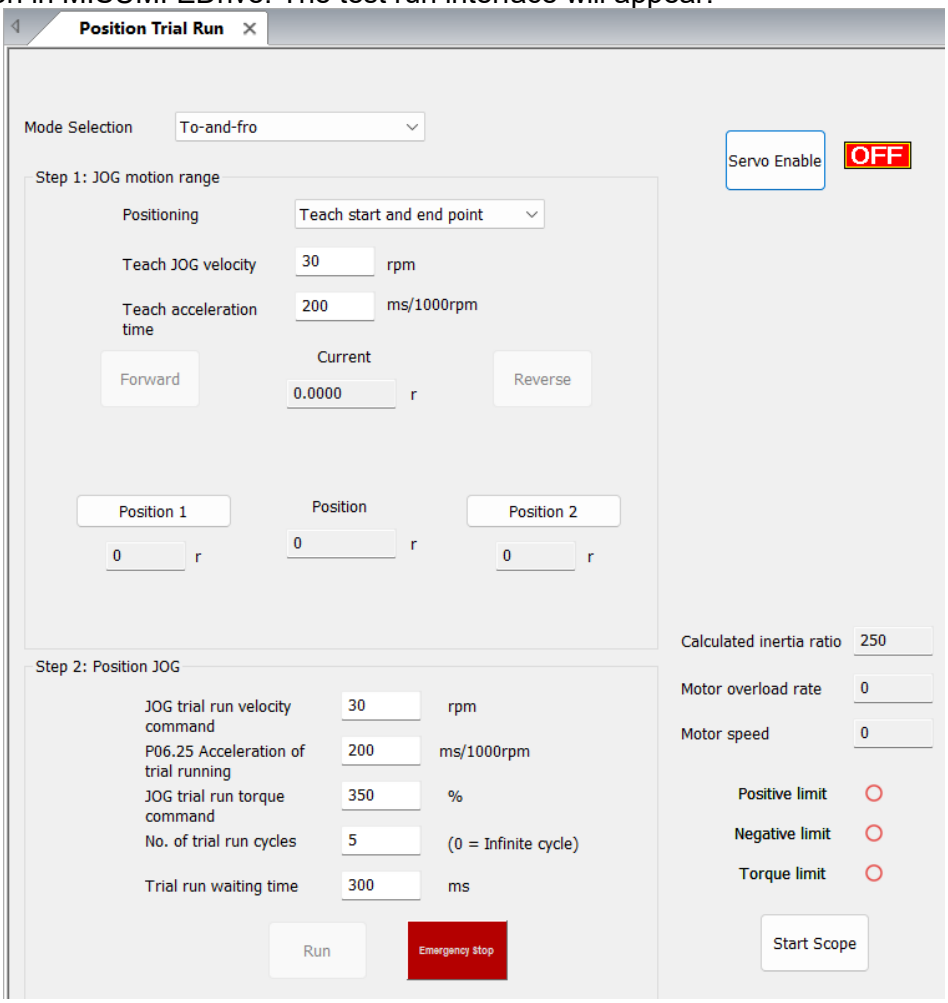


4) Set to Reciprocating Motion Mode, choose positioning start/end point operation mode. After clicking Enable, the red OFF will turn green ON. Set the teaching motion attributes — avoid high speeds to prevent collisions. Use the forward/reverse motion buttons to teach and set the desired start and end points.
5) STEP-2: Configure JOG motion attributes. Execute the set motion within the taught range. Set the number of repetitions for reciprocating motion based on the planned path.
6) During operation, use the monitoring panel on the right to view: Estimated inertia, Motor speed, Motor load rate and Limit status indicators.

Chapter 6 EDrive Quick Commissioning Guide

6.1 Software Installation

EDrive software can be downloaded from Misumi website for free.
https://sg.misumi-ec.com/linked/material/mech/MSM1/CAD/3D/10311229039/E-DHAS.zip

Simply unzip the ZIP file and double-click the EXE file in the folder to open it.

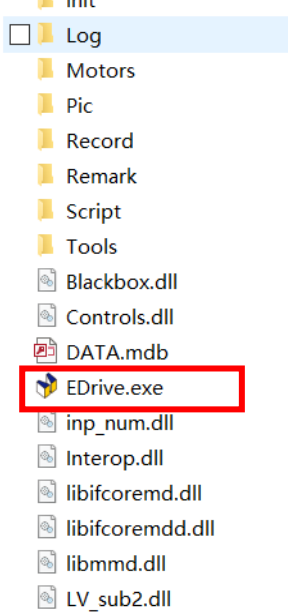

6.2 Connect to Drive

A serial USB type A to type C cable is required for commissioning the drive through EDrive.




When the drive software is started with the USB plugged in, it is automatically identified, and when you press the connect button, it is connected.




EDrive Screen Components





Tool Bar: Select various common functions and execute operations or enter related function interfaces.
Navigation Bar: Fully displays the functions and tools of the servo drive.
Status Bar: Displays the current connection status, emergency stop status, enable status, and alarm status of the servo.
Task Screen: Displays the interface of the selected function.
General Bar: Allows for administrator login, display mode switching, and debugging software reset.

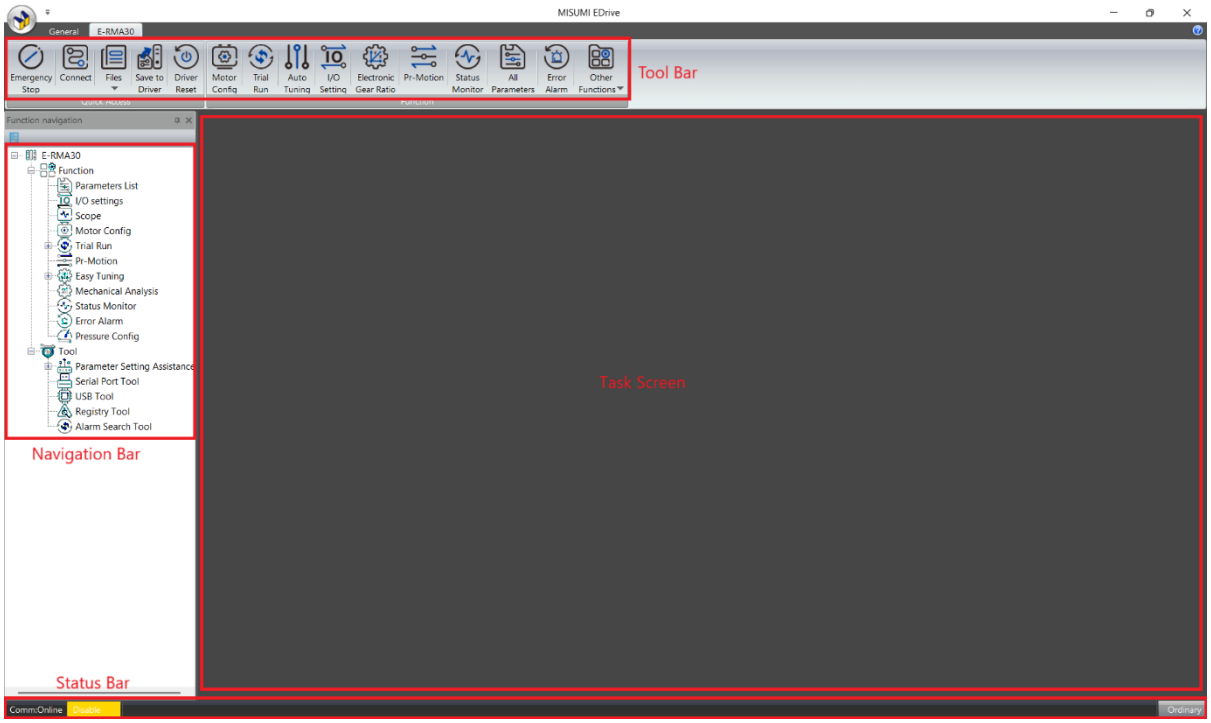


The Navigation Bar is hidden by default. To open it, please go to ‘General’ and check ‘Navigation Bar’.
To change display language, please to go to ‘General’ -> ‘Language’.

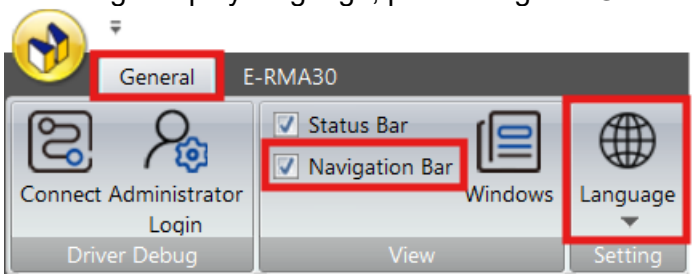

Can open the operation windows of various functions through the function names displayed on the Tool Bar and the Navigation Bar in the main window.

Icon	Name	Description
	**Emergency Stop**	Emergency stop during motion.
	**Connect**	Connect or disconnect the drive from PC. Check Drive’s information.
	**Files**	Open parameter file or download to drive.
	**Save to Driver**	Save parameters to drive.
	**Driver Reset**	Soft restart drive.
	**Motor Config**	Select built in Misumi LMAC motor configuration parameters or create user's motor parameters. Modify motor parameters.
	**Trial Run**	To do jog motion or point to point debug motion.
	**Auto Tuning**	Set and execute auto tuning process.
	**I/O Setting**	Configure physical I/O and virtual I/O. Monitor I/O functions and status.
	**Electronic Gear Ratio**	Set Electronic Gear Ratio.
	**Pr Motion (Pulse drive only)**	Set Pr motion parameters. Set Pr motion paths. Manual trigger Pr motion paths.

	**Status Monitor**	Select monitoring values. Set monitoring rate.
	**All Parameters**	Check and modify all the parameters. Read/Save parameters from/to drive/PC. Compare parameters values.
	**Error Alarm**	Check, read or search Alarm. Check cause(s) of motor not moving.
	**Other Functions**	Open configuration page for Gantry Function and Position Comparison
	**EtherCAT (EtherCAT drive only)**	Open Object Dictionary, 402 Observer, Diagnostics and Object Dictionary Tool. Download ESI file.


6.3 First Motor Movement

Trial Run is divided into Position Trial Run and Velocity Trial Run.
Position Trial Run: Perform reciprocating or unidirectional motion at the set operating speed within the defined positioning range.
Velocity Trial Run: Perform continuous unidirectional motion or jog at the set speed.

Position Trial Run

There are 4 kinds of JOG motion mode:
To-and-fro: The motor moves back and forth within the start and end positions.
One way motion (Positive direction): The motor uses the absolute value of the start and end position difference as the distance for each unidirectional movement, maintaining forward motion.
One way motion (Negative direction): The motor uses the absolute value of the start and end position difference as the distance for each unidirectional movement, maintaining reverse motion.
Multiple round trip motion: The motor uses the absolute value of the start and end position difference as the distance for each unidirectional movement. Moves back and forth based on set trip numbers.


1. JOG motion range:

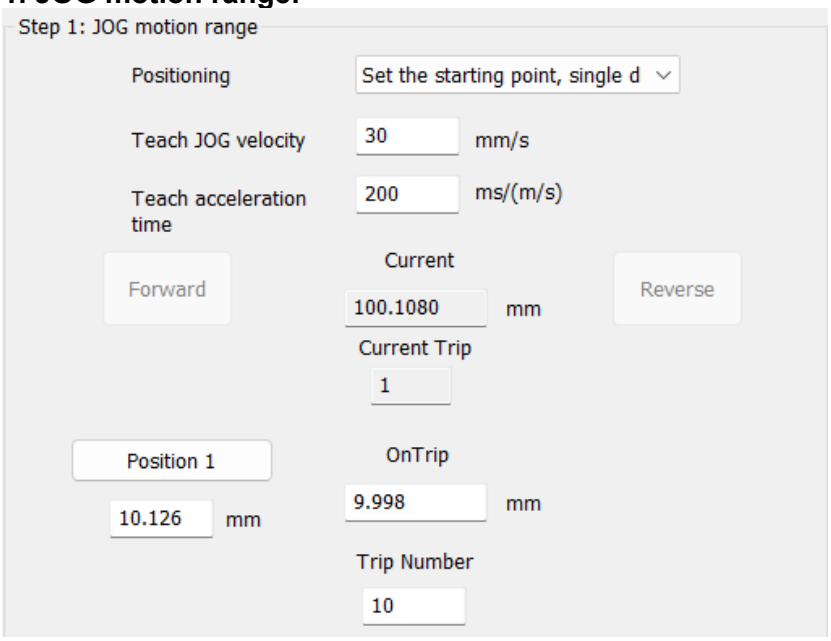

You can use the trial run function to configure the operating path, speed, and acceleration to make the motor move.
Currently, there are three ways to teach the operating range for E-RMA/RME position trial run:
Teach start and end point: After enabling the servo, use the forward and reverse buttons to adjust the position. Click the Set Current Position as Start/End button to complete the start and end position settings.
Input start and end points: Select this mode to directly input the positions in the start and end input boxes. The motor will move to the start point and then perform reciprocating motion.
Input distance: Select this mode to input the operating distance in the position difference. The motor will perform reciprocating motion at the current position.

Note: The teaching speed should not be too fast to avoid collision!


2. Position JOG:

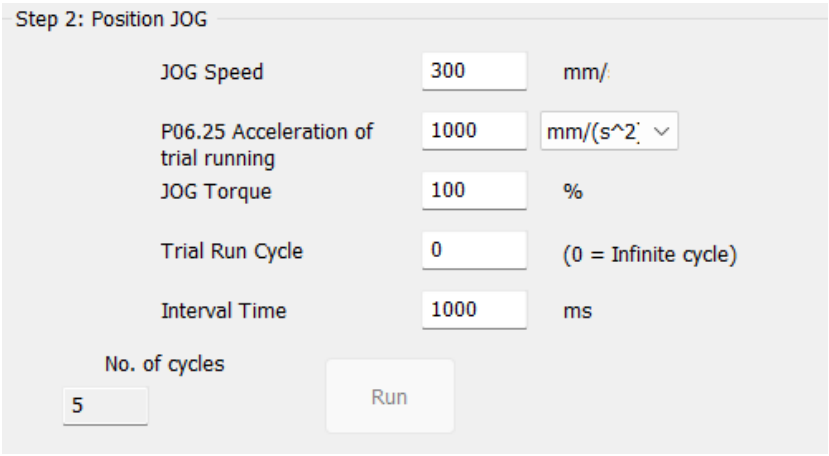

After setting the operating range, the motor will operate differently based on the Position JOG mode.
Before operation, you can set the JOG Speed and Acceleration/Deceleration of trial running.
JOG Torque: You can limit the maximum torque during operation.
Trial Run Cycle Set the number of runs.
Interval Time: Set the interval time for Position JOG.


3. Trial Run Status Monitoring:

The status on the right side allows you to view the Calculated inertia ratio, Motor overload rate, Motor speed and some limit states.



Velocity Trial Run


Velocity Trial Run primarily operates at the set speed and is divided into jog operation and continuous operation.

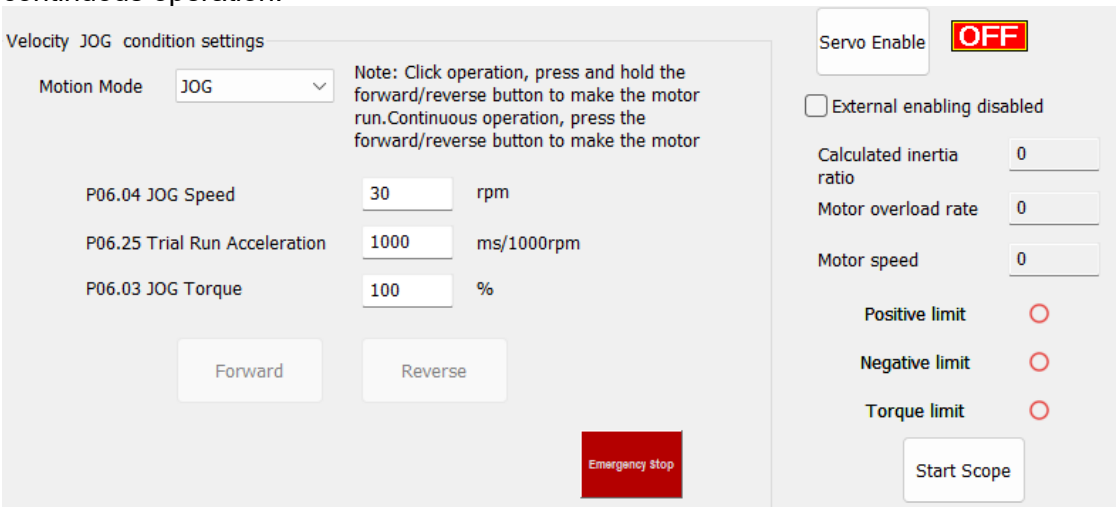


JOG:
The motor runs only while holding the forward/reverse button. When the button is released, the motor stops.
Continuous:
For continuous operation, pressing the forward/reverse button once will make the motor run continuously.

6.4 Auto Tuning

1. Click ‘Auto Tuning’ in the Tool Bar.

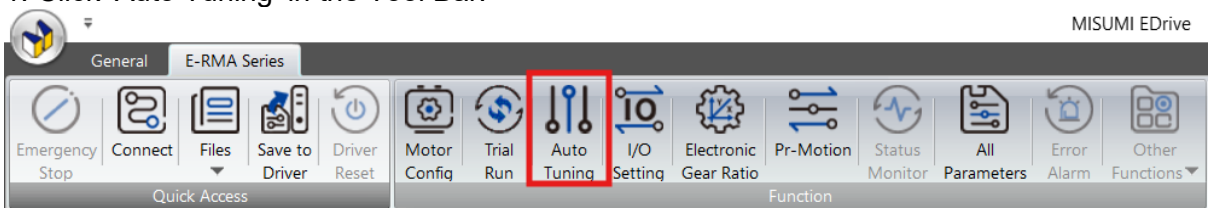


2. Enter the “Auto Tuning” interface. The first screen is for tuning adjustments. The main purpose is to set the execution standards for the auto-tuning process.
‘Tuning response’ is divided into three situations, selected based on the actual mechanical conditions.
‘Tuning mode’ is divided into Positioning mode and Track mode.
You can also select the Unit and set the In position range.

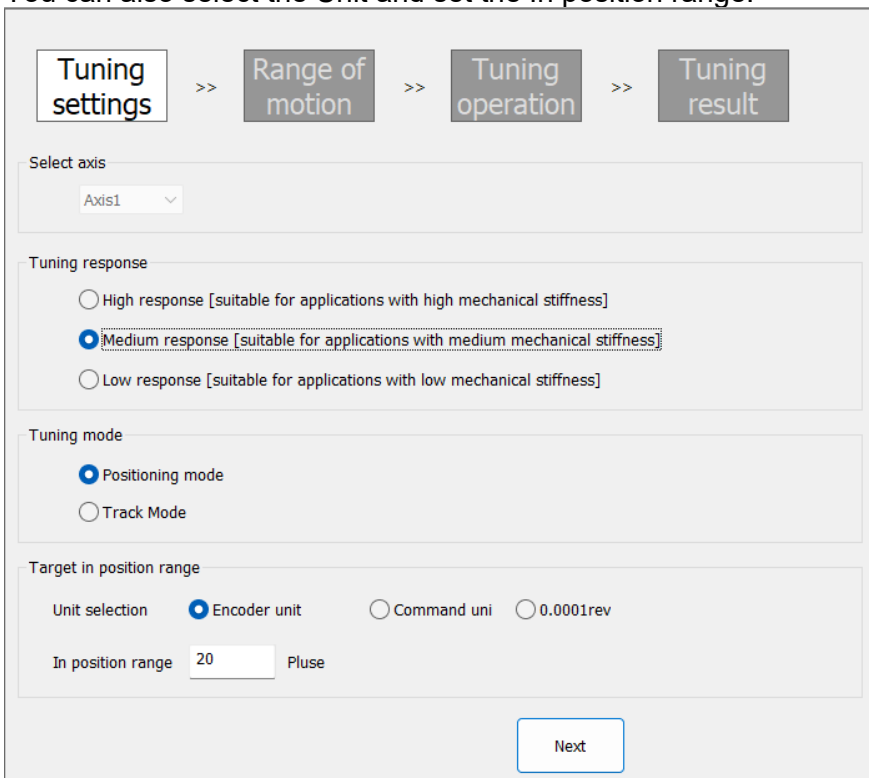

3. Click ‘Next’ to enter the operating range setting interface, where you can set the operating range for one-click auto-tuning.
There are three operating modes, chosen based on the allowable movement direction of the actual machinery:

- To and fro: The motor moves back and forth within the start and end positions.
- One way motion (Positive): The motor uses the absolute value of the start and end position difference as the distance for each unidirectional movement, maintaining forward motion.

- One way motion (Negative): The motor uses the absolute value of the start and end position difference as the distance for each unidirectional movement, maintaining reverse motion.

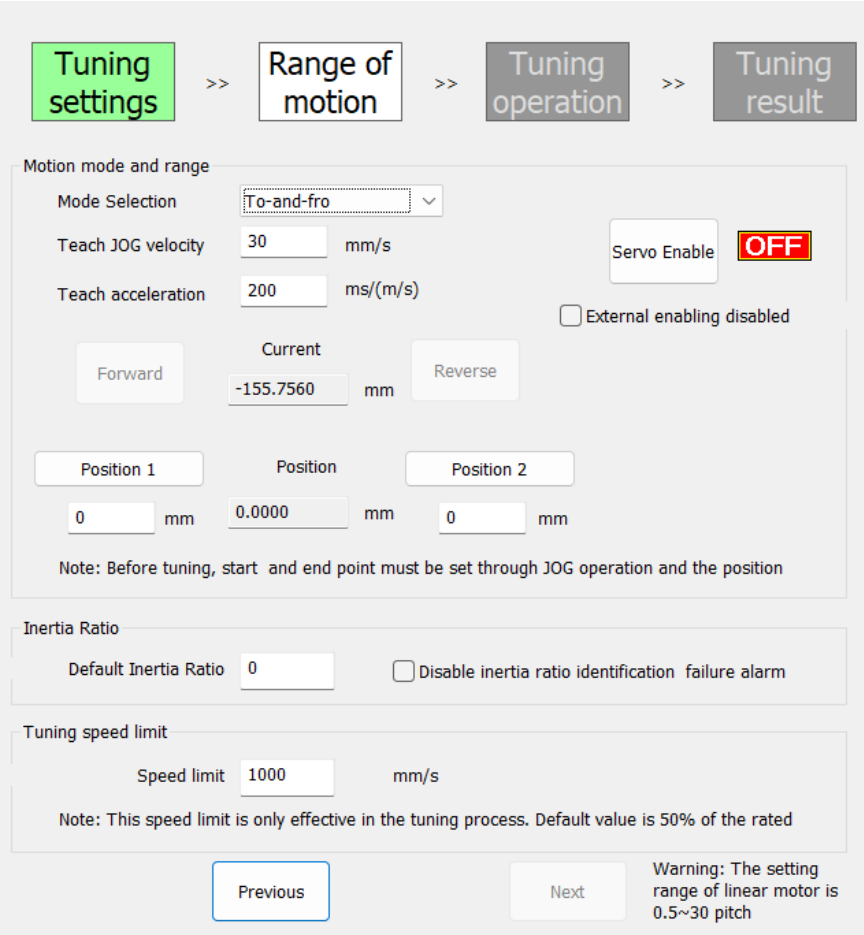


After enabling the servo, use the Forward and Reverse buttons to adjust the position. Click the 'Position 1(2)' button to complete the setting.

Note: The closer the start and end positions are to the actual application travel difference, the better the tuned parameters will adapt, although the adjustment time may increase.


After setting the operating range, you need to set the 'Inertia Ratio'. You can choose whether to mask inertia recognition failures to avoid unsuccessful tuning due to inertia recognition failures. The inertia ratio can be manually entered or preset to a suitable value to avoid equipment shaking in belt applications due to low inertia.

Tuning Speed Limit: Please use the highest speed that will be used in application.


4. Click ‘Next’ and confirm the safety of the movement to enter the tuning operation interface. Tuning will begin, with progress displayed and an emergency stop button provided.

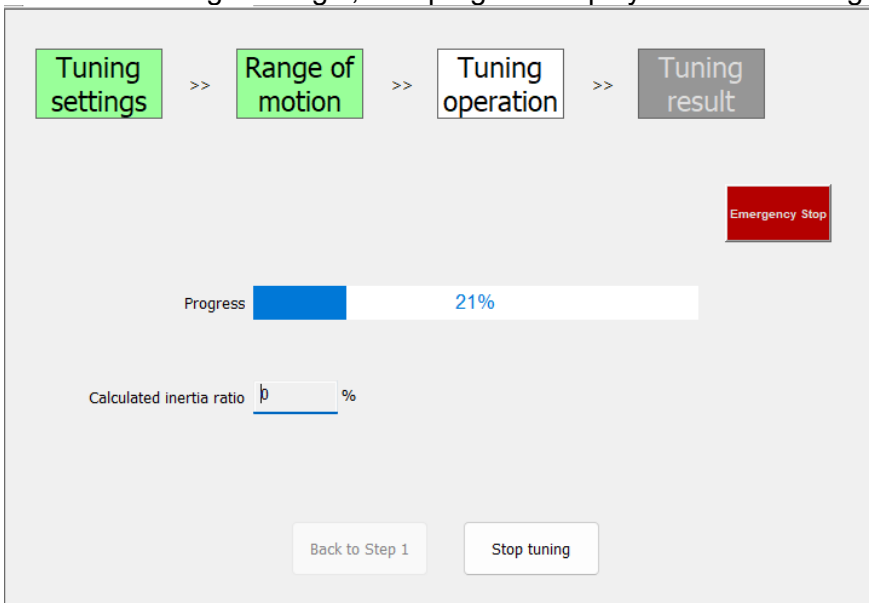


5. After tuning is completed, it will jump to the tuning results interface, showing the Tuning result, Manual fine adjustment and Para comparison.
Tuning result:

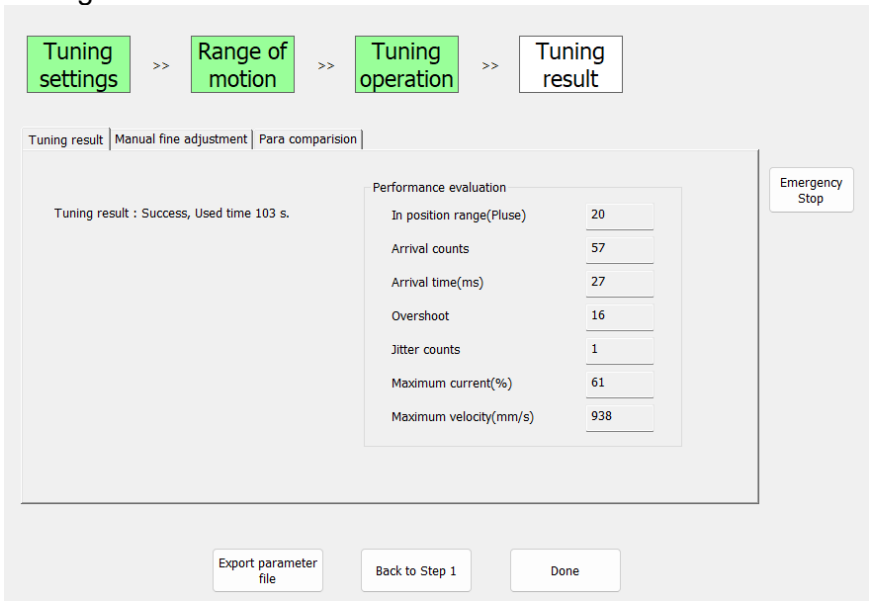


Para comparison:

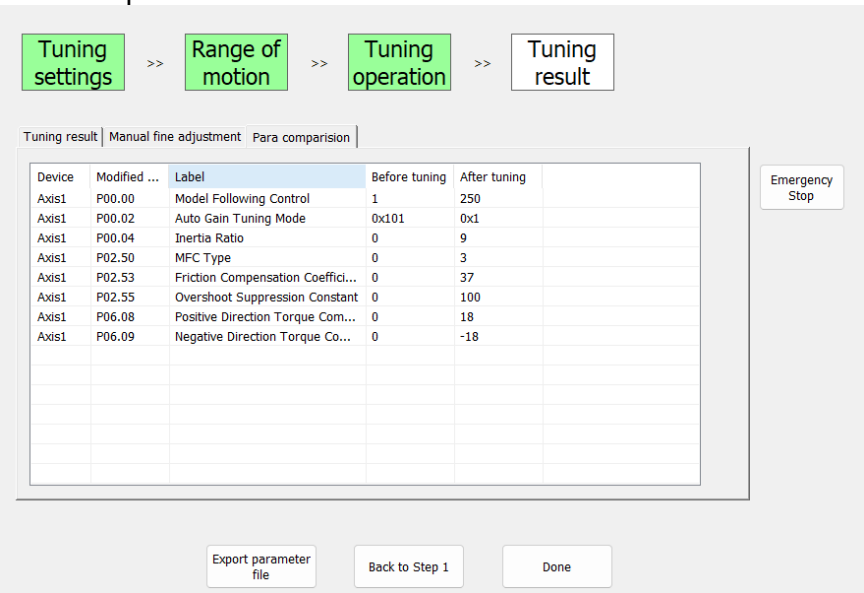

Manual fine adjustment:
If you need to fine-tune the tuning effect, you can enter the manual fine-tuning to modify the gain.

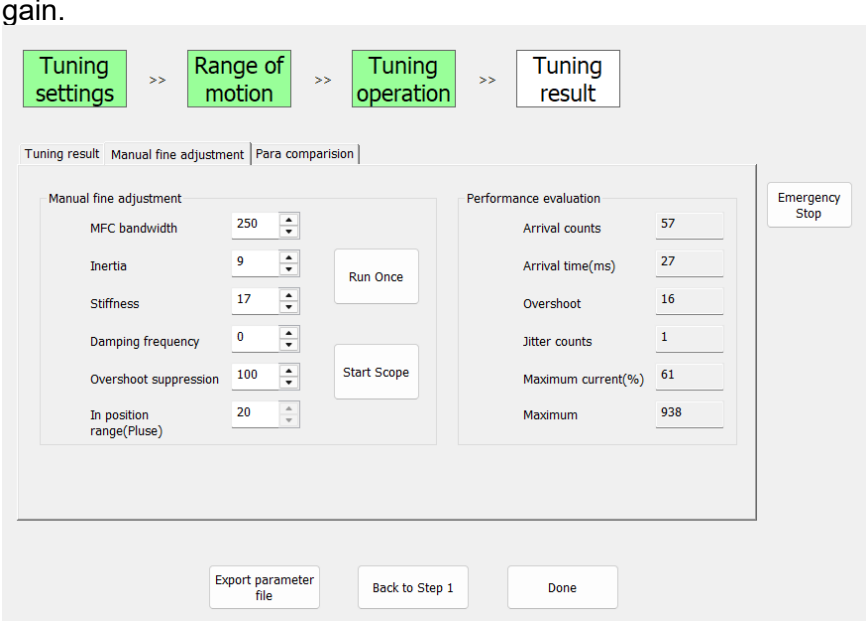

After fine-tuning the parameters, run it again to check the performance evaluation or use the Scope to see if it meets the actual needs.
If you are satisfied with the tuning results, click ‘Done’, and a prompt will ask if you want to save the parameters. Click ‘Yes’ to save the tuned parameters, or ‘No’ to restore the parameters before tuning.

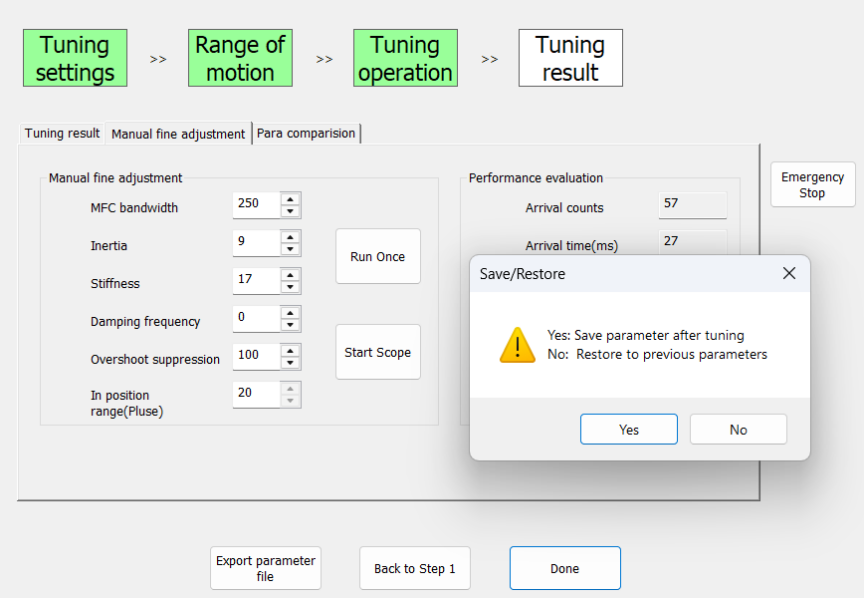


Note: After clicking 'Done', regardless of whether you click 'Yes' or 'No', you will exit the one-click auto-tuning interface.

6.5 Read & Save Parameters

Parameter Management includes 'All Parameters', 'Parameter Download', 'Parameter file open' and 'Offline Parameter file modification'.

6.5.1 All Parameters

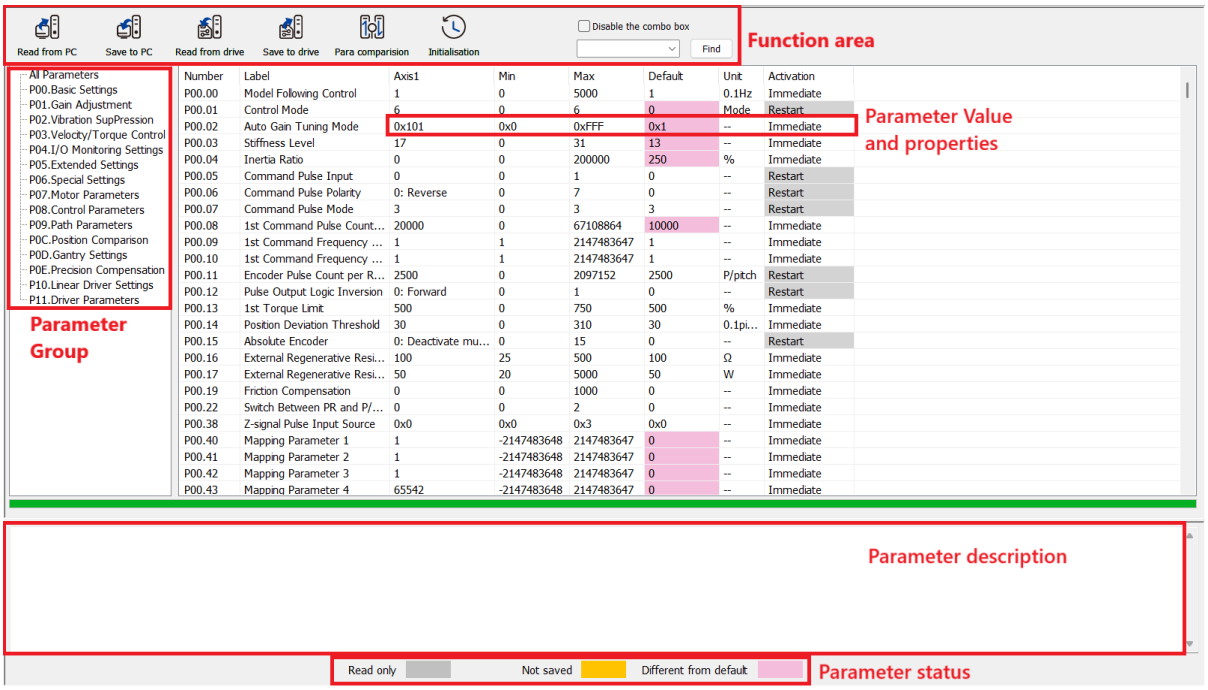

Function area:



Read from PC: Open a saved parameter file.
Save to PC: Save the current parameter recipe as a file to the computer.
Read from drive: Read and refresh the current drive parameters.

Save to drive: Save the current parameters to the drive EEPROM.
Para comparison: Compare current values with factory default values, current values with parameter files, parameter files with default values, and parameter files with each other.
Initialization: Restore the current axis parameters to the default factory settings. After restoring factory settings, the drive needs to be restarted.


Parameter Group: Displays the current servo's parameter group. You can select a parameter group to display all parameters of that group.
Parameter value and properties: The parameter status will show the current set value, the parameter's range, default value, unit, effective mode, etc. Additionally, after modifying the axis set value, it will display the parameter save status. The default value will show whether the current set value matches the default value.
Parameter description: Clicking on a parameter with the mouse will display the description of the current parameter.

6.5.2 Parameter Modification and Download


1. Parameter modification:
Select the parameter you want to modifying and click the current value to modify it.

Number	Label	Axis1	Min	Max	Default	Unit	Activation
P00.00	Model Following Control	1	0	5000	1	0.1Hz	Immediate
P00.01	Control Mode	6	0	6	0	Mode	Restart
P00.02	Auto Gain Tuning Mode	0x101	0x0	0xFFF	0x1	--	Immediate
P00.03	Stiffness Level	17	0	31	13	--	Immediate

2. After setting, exiting the edit or pressing Enter will directly send the parameter to the drive, but it will not be saved to the EEPROM. After powering on again, the parameter will revert to the value saved in the EEPROM.
When the parameter value is sent but not saved, an orange background will notify the user that the current set value is not saved.

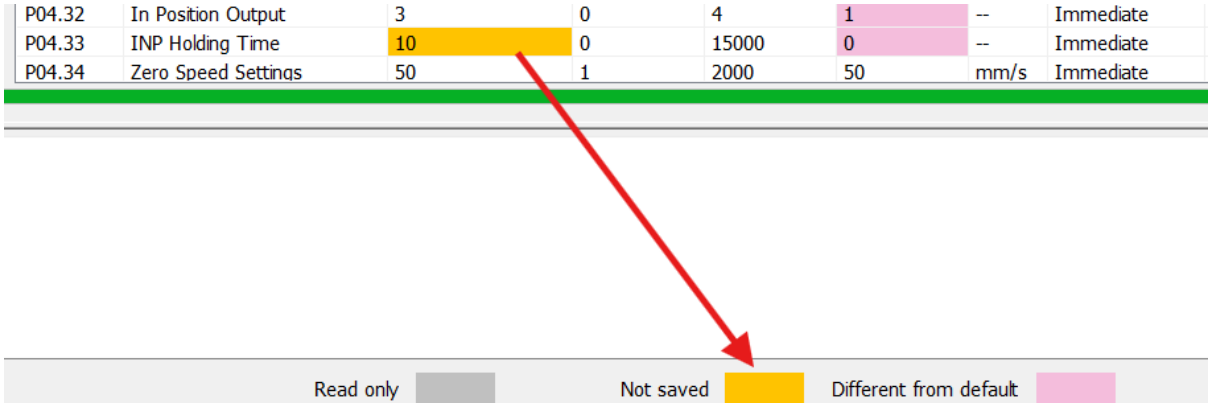


3. Save to drive:
After modifying, if you need to save the parameter to the drive EEPROM to prevent loss due to power failure, or if the effective mode is a power-off effective parameter, you must save the parameter. Click "Parameter Save" to save the parameter to the EEPROM. A green progress bar will show the save progress, and a prompt will indicate that the parameter has been successfully sent.

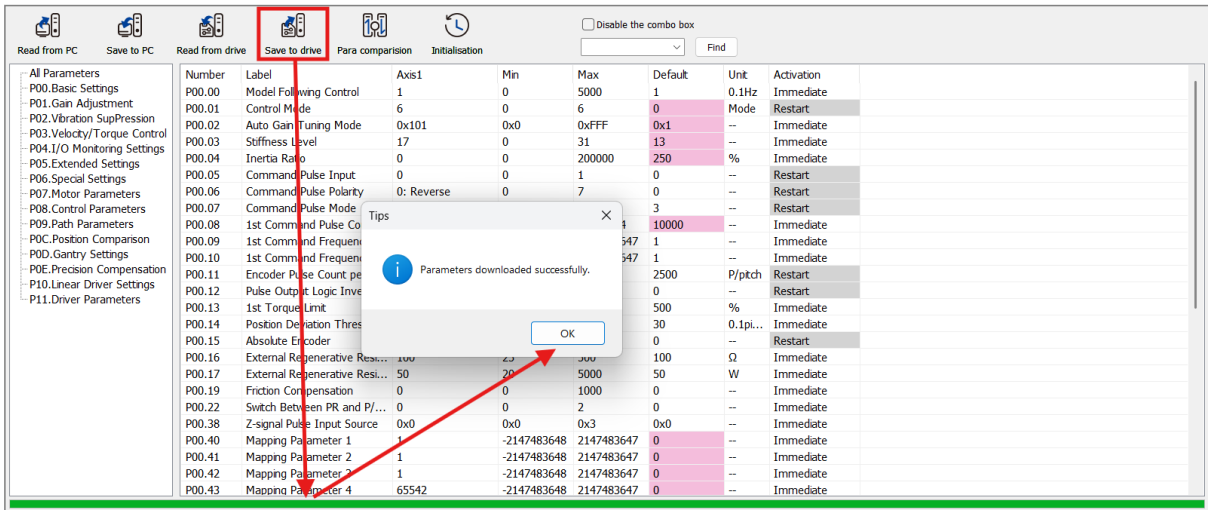

6.5.3 Parameter Save to PC


Save to PC allows you to save the servo drive's parameters to a file, enabling you to confirm drive parameters without connecting to the servo drive or import parameters into another servo drive.
Clicking " Save to PC " in the function area allows you to save the servo drive's parameter recipe as a file. After clicking "Save to PC," select all the check box in the pop out window then click ‘OK’. A save dialog box will pop up. Choose an appropriate path, name the parameter file, and click "Save" to save the parameter file to the current folder.

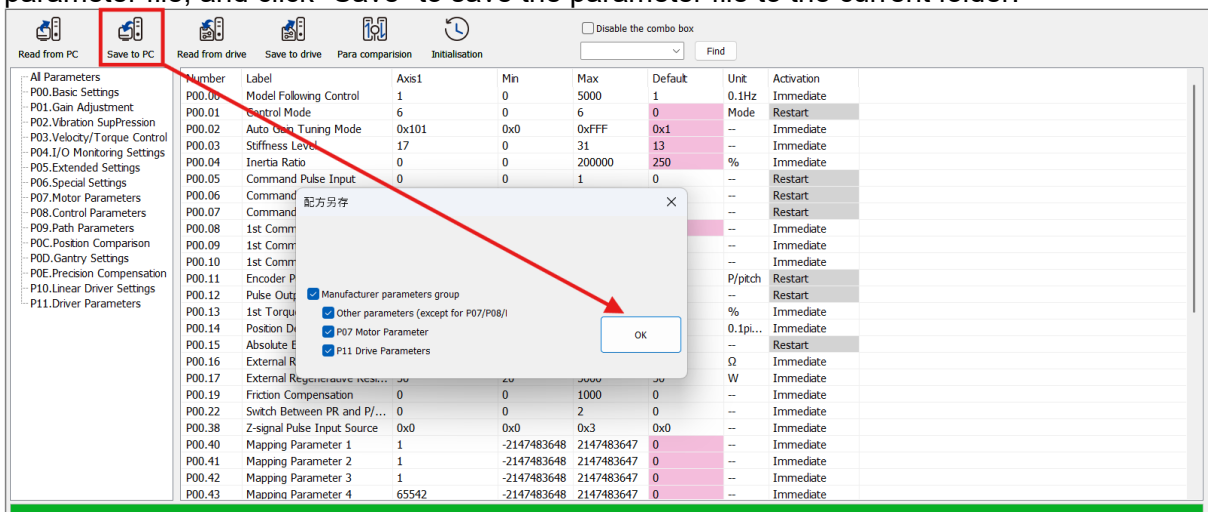

6.5.4 Read Parameter File From PC

Open the parameter file saved on the PC (with the .msm file extension). After opening, you can view the parameter settings in the parameter file and send the parameter recipe file to the currently connected drive.
1. Click "Read from PC" in the Function area to open the parameter file.

2. Click "Send and Save" to send and save the current parameter table to the drive.




3. To prevent confusion and operational errors or risks, there are corresponding restrictions on sending and saving parameters:

- If the drive series of the parameter file does not match the drive series to be sent: Sending is not allowed.
- If the drive series matches but the software version does not: Differences are indicated, but sending is allowed.


6.5.5 Compare Parameters


Click the “Para comparison”, and a comparison box will pop up. You can select parameters to compare. It provides comparisons between the current parameter table, default values, and parameter files.
After clicking “Compare”, it will display the parameters where Compare Object 1 and Compare Object 2 are inconsistent.

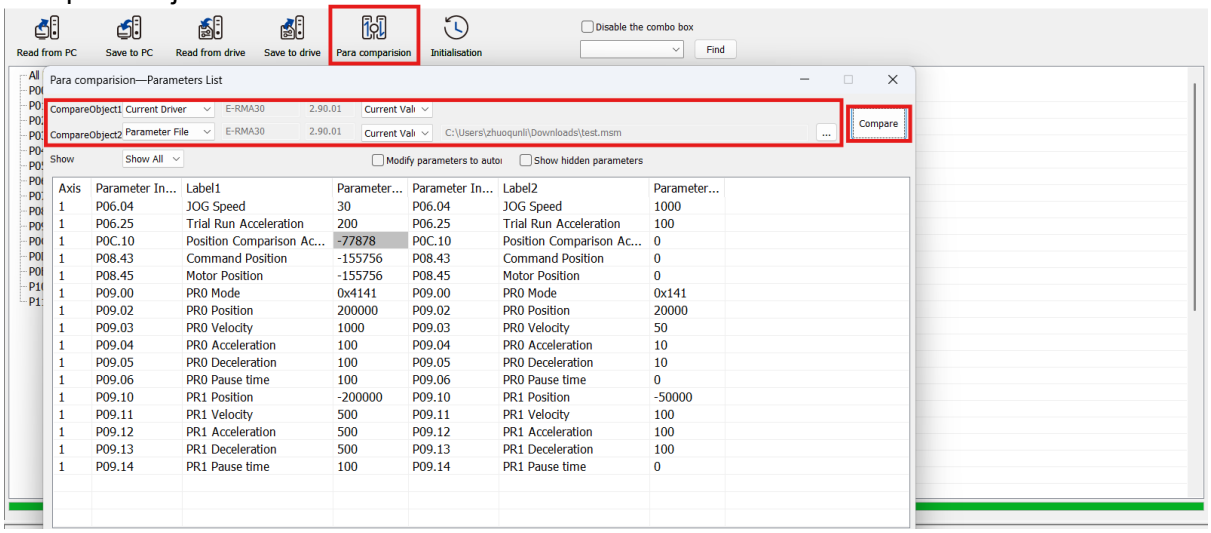

6.5.6 Initialization

Click the “Initialization”, and a restore factory settings popup will appear. You can select the parameter groups you want to restore to factory settings:
Manufacture parameters group:
Other parameters (except for P07/P08(P011))
P07 Motor Parameter
P08 P09 RE Parameter (For Pulse drive only)
P11 Drive Parameters
Objection Dictionary Parameter: (For EtherCAT drive only)
Communicate Parameter
402 para
Note: Manufacturer group parameters do not support resetting only P07 or P11 parameters. They must be restored along with other parameters.

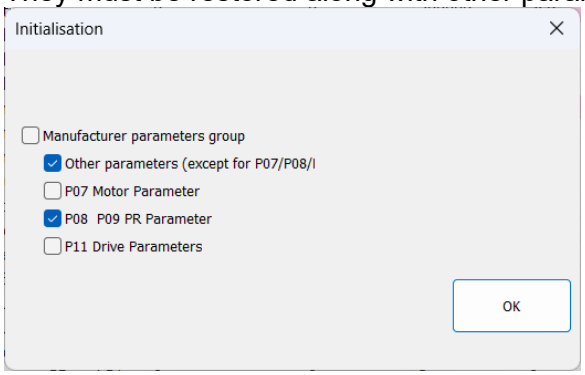

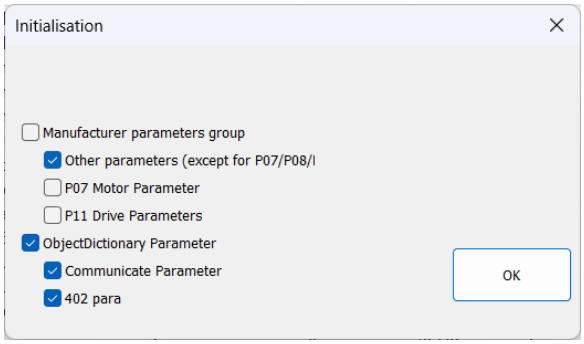


After the progress bar is completed, the factory reset is successful. If unsuccessful, a failure prompt will appear.

Note:

1. Factory reset is not allowed in the enabled state.
2. After restoring factory settings, please perform a soft reset/power-off restart of the drive.

6.5.7 Save to Drive


There is no need to open the parameter summary table for sending and counting. This is for scenarios where parameters need to be quickly imported into other drives.

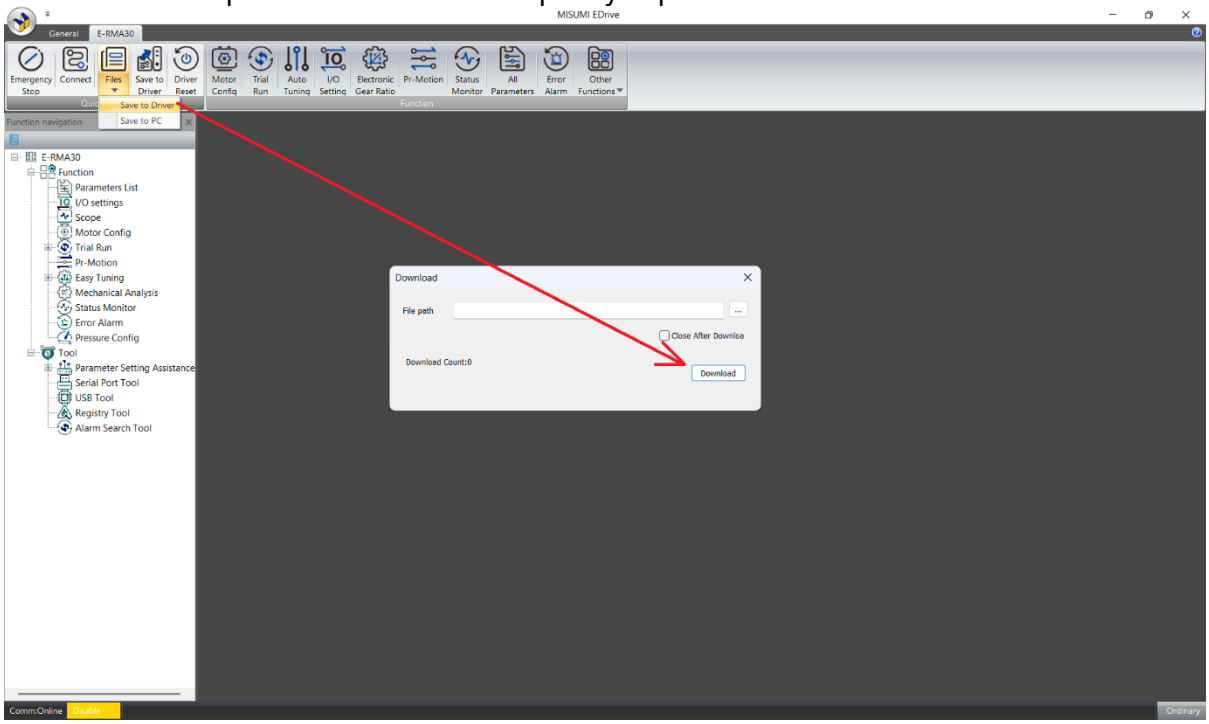

6.5.8 Open Parameter File, Object Dictionary File and Scope File


In offline mode, you need to switch to offline mode and select the corresponding series to open the relevant parameter file.

If you must open parameters in offline mode without selecting offline mode, you can use the file open tool.

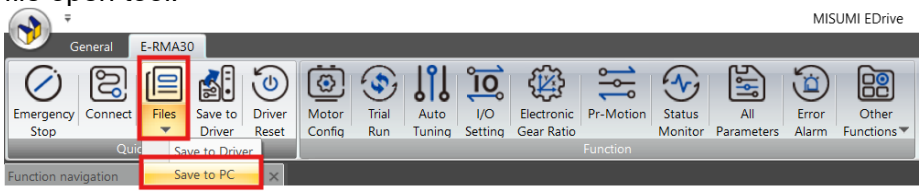

6.5.9 Offline Parameter File Modification


After opening the offline parameter file, you can modify the parameter settings. After modification, click "Recipe Save As" to save the modified parameters.

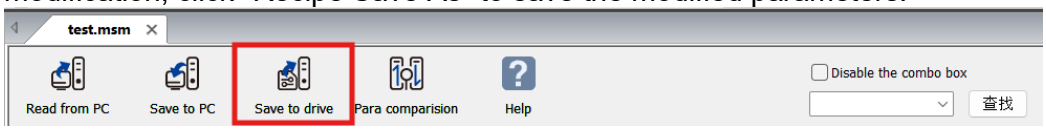


6.6 Scope Measurement

Display the operating status as waveform images on the scope to monitor the action status during servo adjustment.
Double click “Scop’ under Navigation Bar to open it. The scope's functional areas are as follows:


Area	**Function description**
A: Waveform Open/Save File Area	Supports opening waveform files and saving waveforms as files.
B: Sampling Precision Selection Area	Mode: Options include single-frame high precision and multi-frame high/low precision. Sampling Interval: With 1024 sampling points, the larger the sampling interval, the longer the total sampling time. Continuous Sampling: When continuous sampling is selected, waveform sampling will occur as long as the trigger conditions are met after clicking Collect.
C: Trigger Condition Selection Area	Allows setting trigger conditions, with options for axis signals and channel signals.
D: Sampling Channel Selection Area	Can set six groups of analog channels and four groups of digital signal channels.
E: Waveform Collection, Measurement, and Display Area	Includes scale display, time axis, collect button, cursor function, and adaptive features.
F: Waveform Display Area	Displays the collected waveforms.
G: Channel Setting Area	Allows changing the scale value and offset of each channel waveform.
H: Historical Waveforms	View the waveforms from the last 16 collections, and perform waveform overlay and comparison of multiple waveforms.

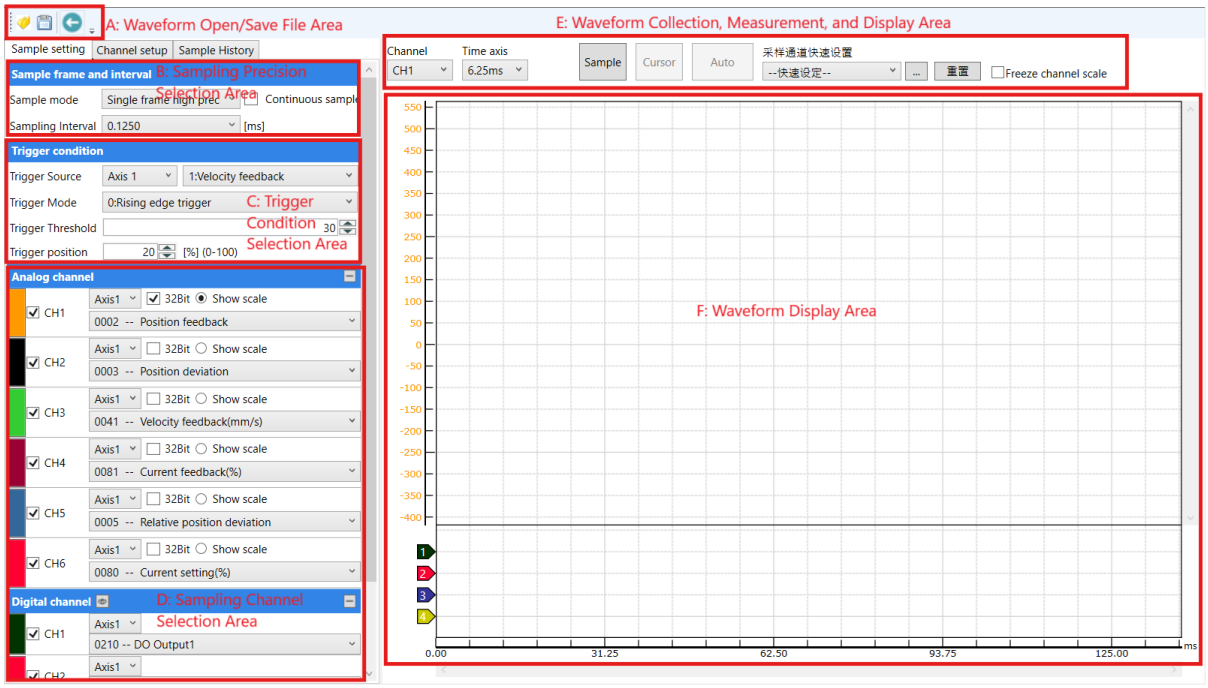

Channel Setting Area:

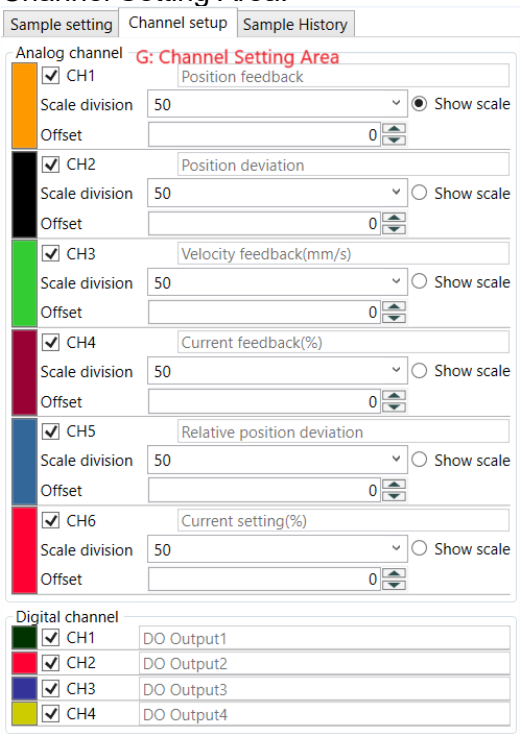


H: Historical Waveforms

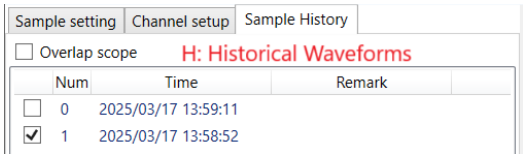

Buttons Introduction:

① Open offline files
② Save graph data
③ Hide configuration bar
④ Select simulation channel Y-axis
⑤ Set X-axis interval


⑥ Start acquisition
⑦ Open cursor
⑧ Automatically calculate suitable simulation channel scale value and offset to fit waveform to screen size
⑨ Reset sampling settings
⑩ Maintain channel display ratio. Do not perform auto-adaptation when drawing waveform after next acquisition



6.6.1 Single Capture


Single frame high precision:

(1) Set the sampling mode to Single frame high precision and adjust the sampling interval according to actual needs. The larger the sampling interval, the longer the total sampling time, and the worse the precision.
(2) Set the trigger conditions. The trigger source can be selected as either an axis or a channel. The trigger mode can be set to rising edge or falling edge. Position setting: For example, when the position is set to 50%, the trigger point is at 50% of the entire waveform.
(3) Channel settings: Set the desired sampling channels according to your needs.
(4) After completing the settings, click "Acquire." As long as the trigger conditions are met, a waveform will be acquired once.

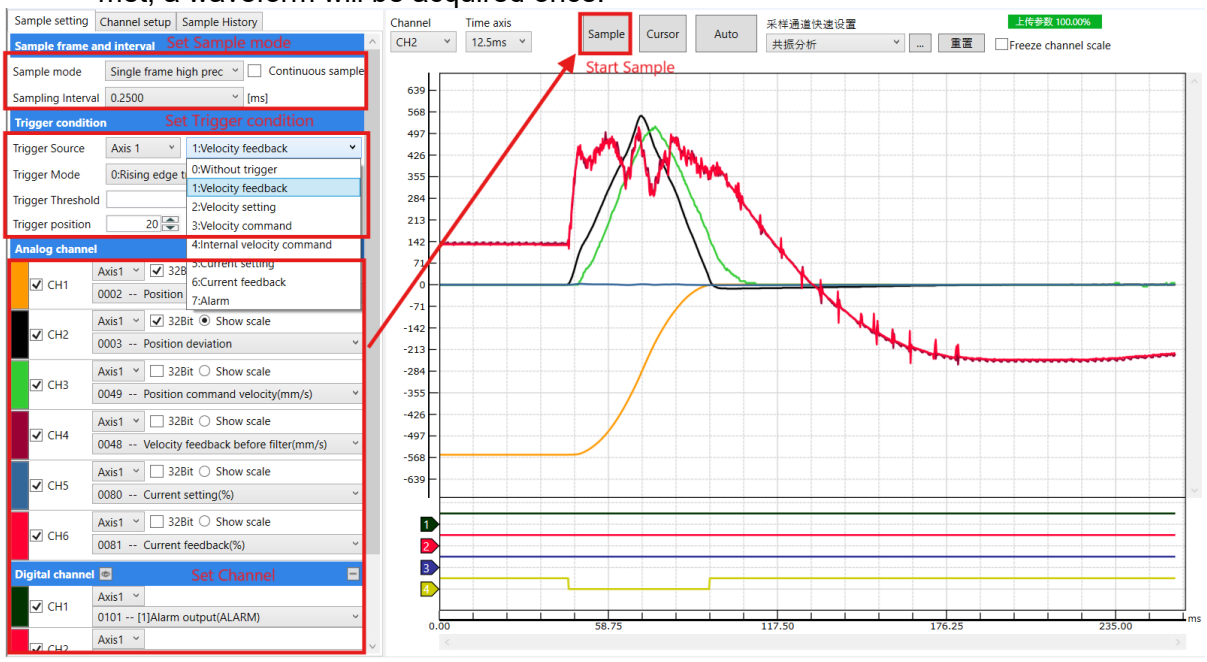

6.6.2 Continuous Capture

After selecting ‘Continuous sampling’, click ‘Sample’. As long as the trigger conditions are met, waveforms can be acquired without needing to click ‘Sample’ before each waveform acquisition.

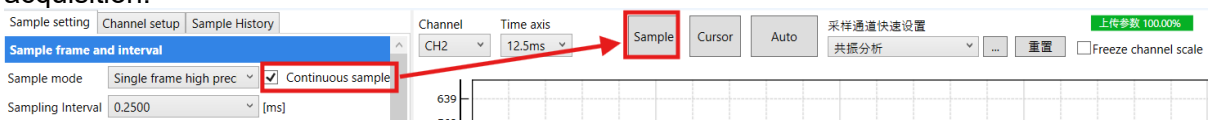


6.6.3 Zoom In/Out

This supports quick zooming of Scope waveforms.

Simply select the waveform area to be enlarged, and it will be magnified to fit the entire waveform interface.
Forward selection enlarges the waveform, reverse selection reduces it, and double-clicking the waveform returns it to the initial state.


6.6.4 Cursor Function

After data acquisition is complete, click the cursor button to open the cursor window. The cursor includes the following functions:
Supports two X-axis cursors: t1, t2, placed using the left and right keys
Supports two Y-axis cursors: v1, v2, placed using Ctrl + left and right keys
Displays the amplitude corresponding to t1, t2, v1, v2 for each channel
Calculates the maximum, minimum, average, and effective values between t1 and t2 for the analog channel

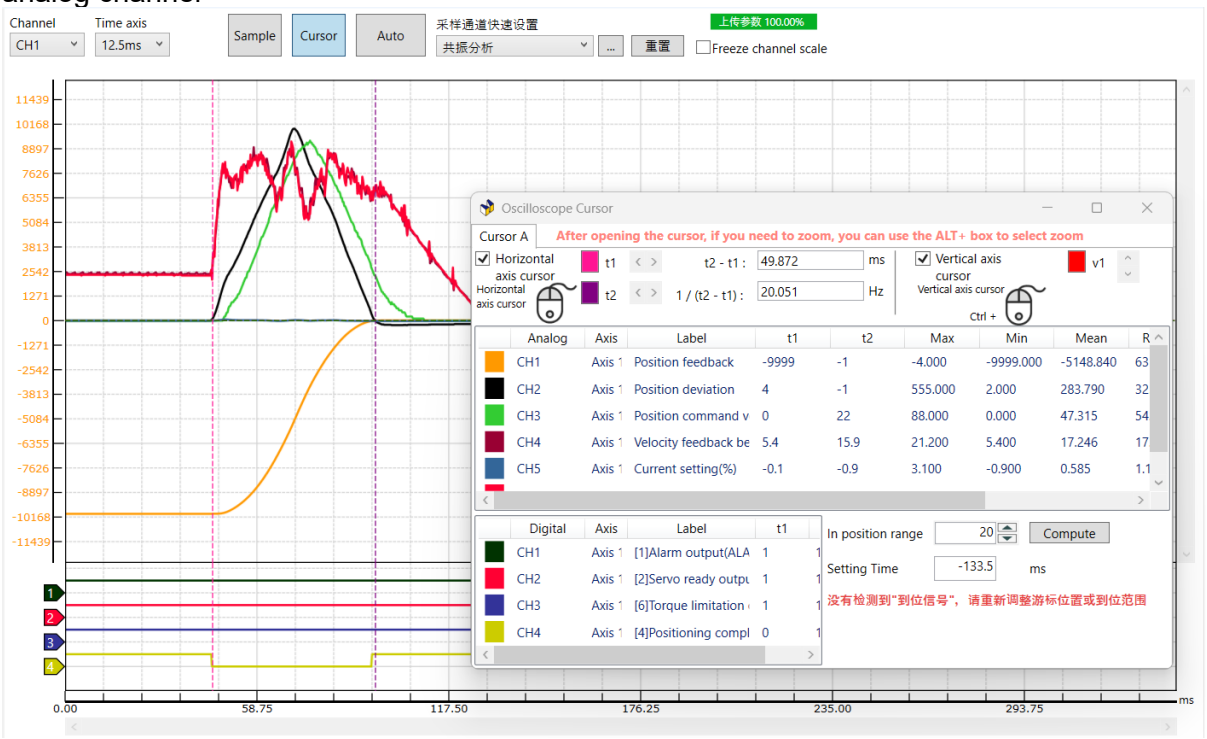

6.6.5 Overlap Scop


Switch to the ‘Sample History’, which records the last 16 waveforms acquired. At this point, you can select ‘Overlap scop’ to compare multiple sets of waveforms.
Note: ‘Sample History’ only saves waveforms with the same sampling conditions. If you change the sampling conditions and acquire again, the historical waveforms will be cleared!

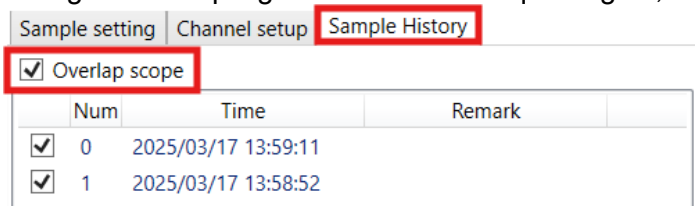


6.7 Fault Diagnosis

Fault analysis currently includes two methods: Error Alarms and Black Box.


When a fault alarm occurs, an alarm message will appear in the status bar below. You can double-click the alarm message in the Status bar to enter the fault alarm function or click the ‘Error Alarm’ button in the Tool Bar to enter.
Clicking on the current alarm allows you to view the current alarm information, fault type, fault analysis, and some information at the time of the fault, making it convenient for diagnosing and analysing the alarm.
If the current fault is clearable, after eliminating the cause of the fault, click "Clear" to remove the alarm status.

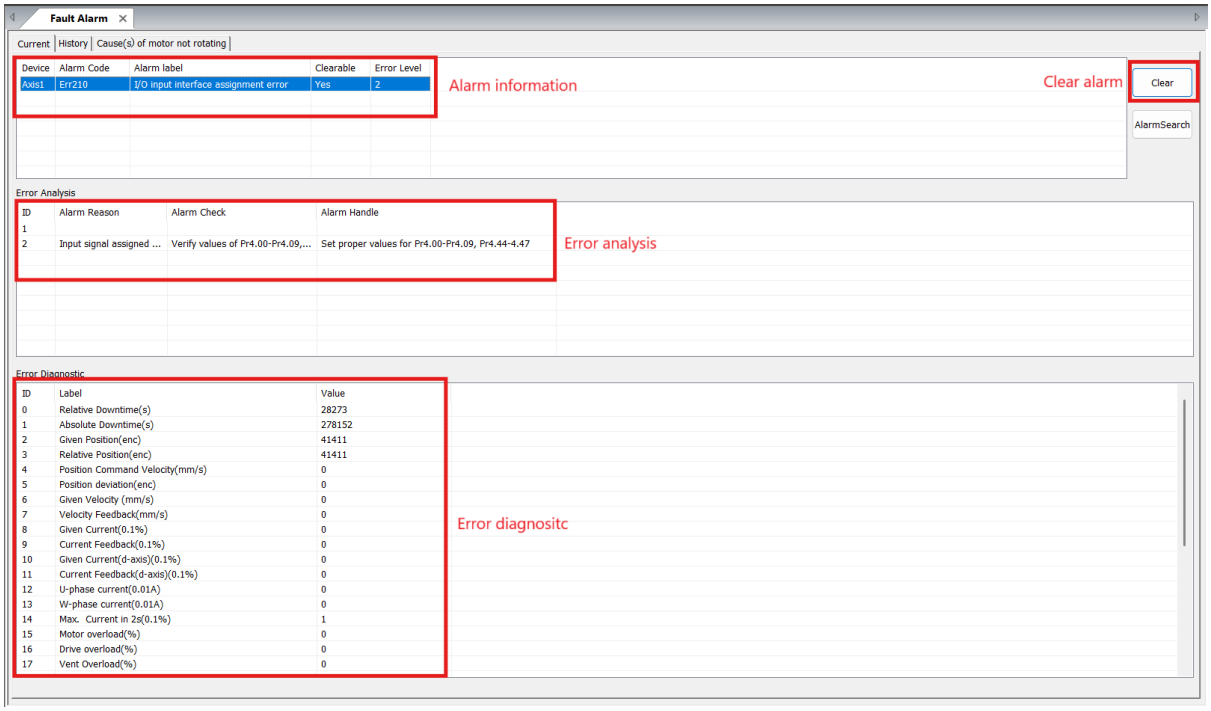

Clicking "History" allows you to view previous alarm information, saving up to the last 14 alarm messages. If there are more than 14 alarms, the alarm information will be overwritten in order of occurrence.
Clear Historical Alarms: You can clear the alarm history of the drive. Generate Report: You can generate a file of historical alarms, making it convenient for customers to create fault documents to send to engineers for analysis.

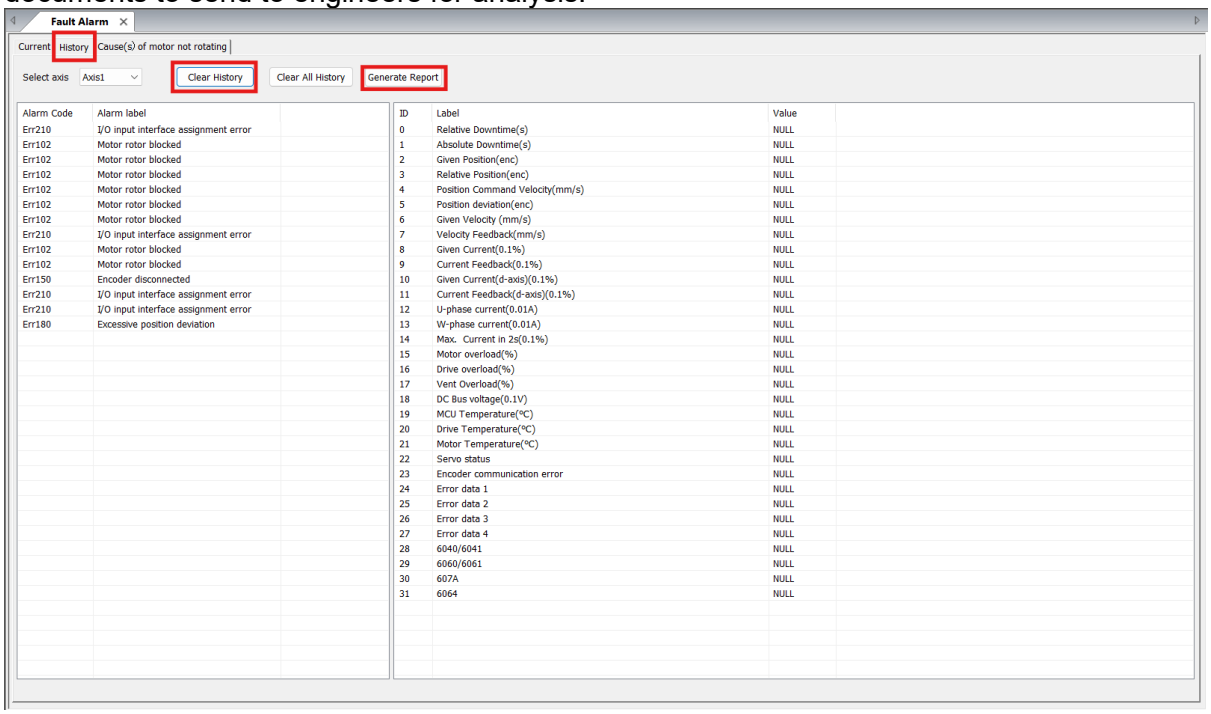

Clicking "Cause(s) of motor not rotating" allows you to view the current reasons why the drive is not rotating.

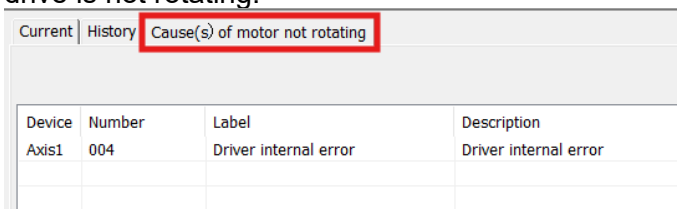

Chapter 7 Control Mode

Control modes for E-DHAS□□PF series AC servo drivers can be divided into 3 categories: Position control mode, Velocity control mode and Torque control mode. RS models also come with a hybrid control mode which is a combination of any 2 modes which are above.

- Position control mode determines position through pulse count. External input pulse frequency determines rotational speed, mainly through motion controller, control card (5V pulse), PLC (24V pulse). Due to the ability of position control mode to control velocity and position tightly, it is usually used in positioning devices. It is the most widely used control mode for servo drivers.
- Velocity control mode controls rotational speed through digital I/O or communication command settings. Mainly use in application where speed stability is required.
- Torque control mode is used in applications where forced applied on production material is restricted, mainly winding or scrolling devices. For example, coil winding machines or optical fiber cable production. Torque settings change according to the coil winding diameter as to maintain stable force output throughout the process.

To set control mode


P00.01	Label	Control Mode Settings			Valid mode(s)	P	S	T
	Range	0~10	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0003		
	Valid	After restart						

Value	Description	
	1st mode	2nd mode
【0】	Position	—
1	Velocity	—
2	Torque	—
3	Position	Velocity
4	Position	Torque
5	Velocity	Torque
6	PR internal command control	Position P00.22=1
		Velocity P00.22=1
		Torque P00.22=2
7~10	Reserved	

◆When 3, 4, 5, 6 combination hybrid mode, 1st and 2nd mode can be chosen accordingly with control mode switching input (C-MODE).
C-MODE: Invalid, select 1st mode.
C-MODE: Valid, select 2nd mode.
Please allow some time in between mode switching commands.
◆Please set P00.01 = 6 to switch to other modes from PR mod, then set 2nd mode using P00.22.

C-MODE is defaulted to Normally Open


How to Select the Correct Control Mode

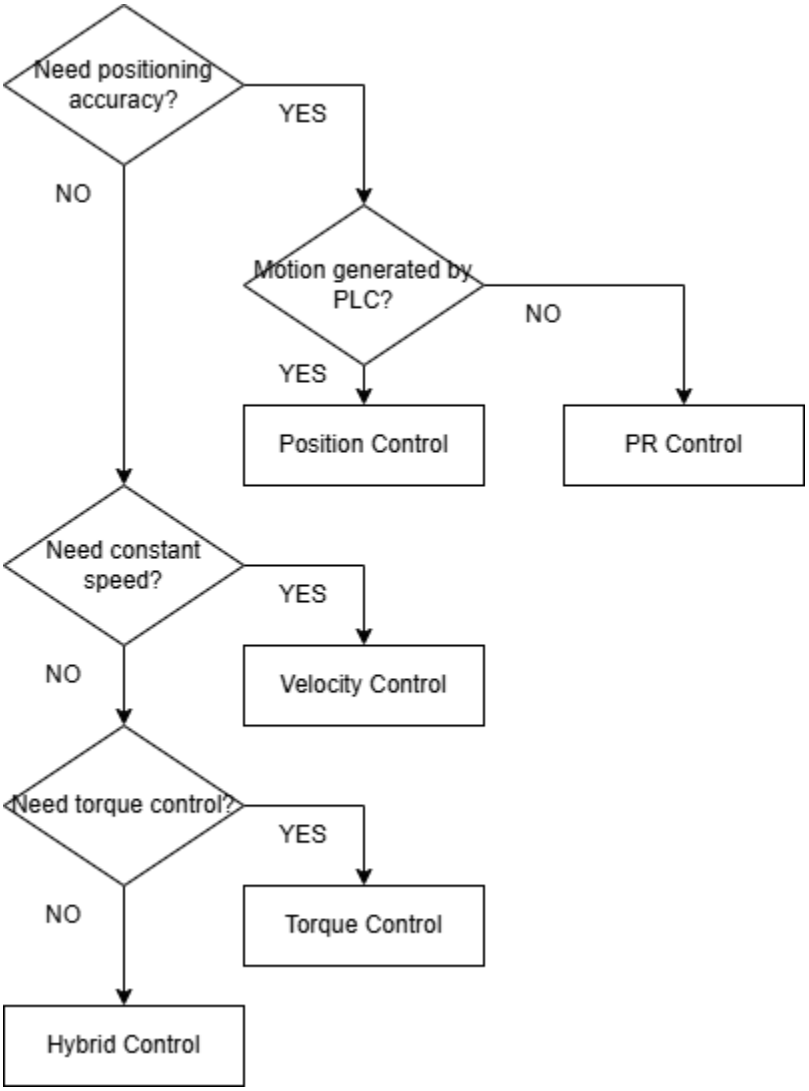


7.1 Position Control

Position control determines rotational speed by frequency of external input pulse and angle of rotation through pulse count using 5V pulse from motion controller, control card or 24V pulse for PLC. Applies where precise positioning is required.


The basic position control flow chart shows as below:

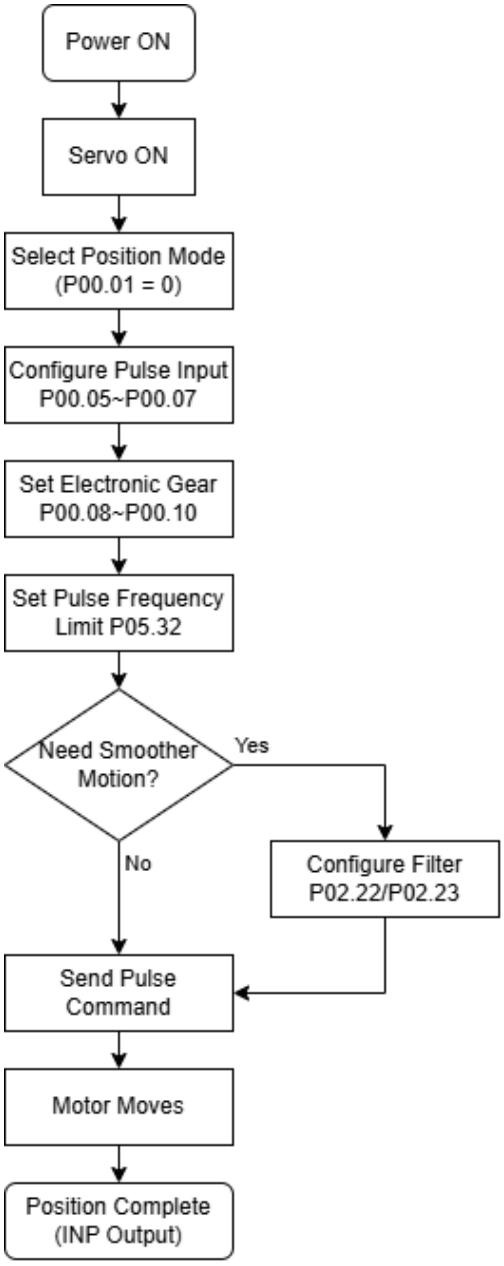

Set P00.01 = 0 to activate position control mode.

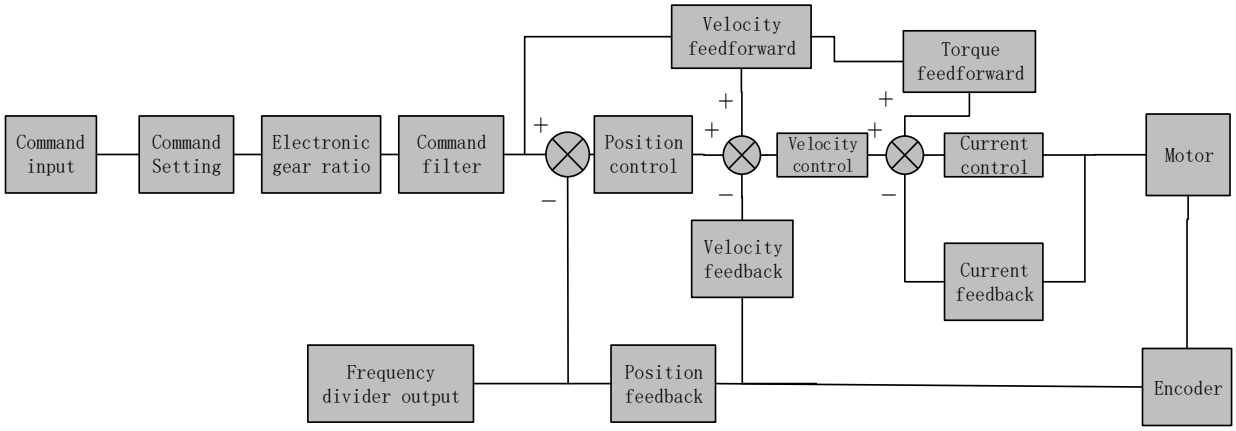

Please set related servo parameters according to the following diagram.

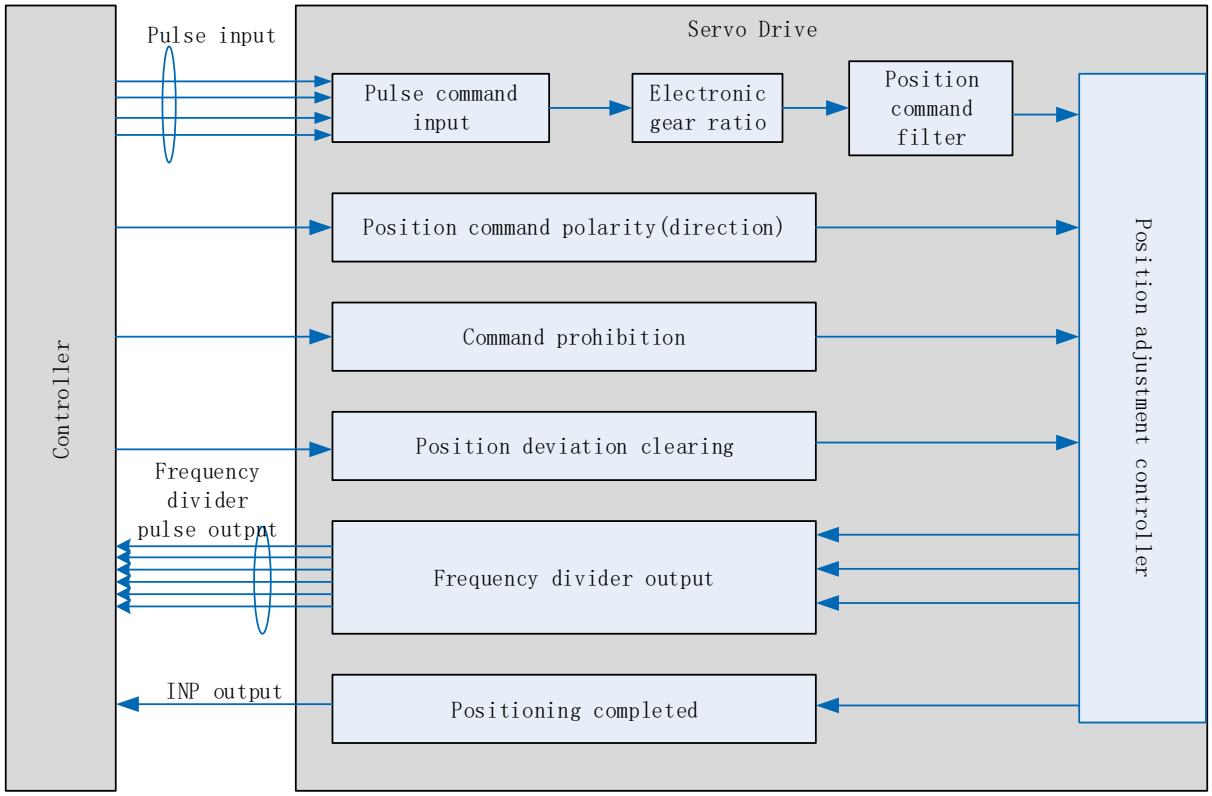

7.1.1 Pulse Input and Direction Settings

Position command (pulse) input method:

1. A and B phase pulse
2. Positive/Negative direction pulse (CW / CCW)
3. Pulse and direction

Set pulse mode, rotational direction and max. pulse input frequency according to actual need

CN1 PIN	Label	Definition	Description
1	PUL+24	Pulse command input	Low speed pulse direction command input： PUL+ / PUL-： 5V differential input（500KHz） DIR+ / DIR-： 5V differential input（500KHz） PUL+24 / PUL-： 24V single ended input (200KHz) DIR+24 / DIR-： 24Vsingle ended input (200KHz)
3	PUL+		
4	PUL-		
2	DIR+24	Direction command input	
5	DIR+		
6	DIR-		
44	PULSH+	High speed pulse command input	4MHz high-speed pulse command input: 5V differential input
45	PULSH-		
46	SIGNH+	High speed direction command input	4MHz high-speed direction command input: 5V differential input
47	SIGNH-		

P00.05	Label	Command pulse input selection			Valid mode(s)	P		
	Range	0~1	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x000B		
	Valid	After restart						

Value	Description
【0】	Pulse input low speed channel (200/500kHz pulse input)
1	Pulse input high speed channel (4MHz pulse input)









Both channels cannot be used at the same time.

P00.06	Label	Command pulse polarity inversion			Valid mode(s)	P		
	Range	0~1	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x000D		
	Valid	After restart						

P00.06 and P00.07 set command pulse input inversion and mode correspondingly.

P00.07	Label	Command pulse input mode			Valid mode(s)	P		
	Range	0~3	Unit	—	Default	3		
	Byte length	16bit	Attribute	R/W	485 address	0x000F		
	Valid	After restart						

Command pulse input

Command Polarity inversion (P00.06)	Command pulse input mode settings (P00.07)	Command Pulse Mode	Positive signal	Negative signal
【0】	0 *or* 2	90°phase difference 2 phase pulse （Phase A+ Phase B）		
	1	CW pulse sequence ＋ CCW pulse sequence		
	【3】	Pulse sequence ＋ Directional symbol		
1	0 *or* 2	90°phase difference 2 phase pulse （Phase A＋Phase B）		
	1	CW pulse sequence ＋ CCW pulse sequence		
	3	Pulse sequence ＋ Directional symbol		

Command pulse input signal max. frequency and min. duration needed

Command pulse input interface		Max. Frequency	Min. duration needed（μs）					
			t1	t2	t3	t4	t5	t6
Pulse sequence interface	Differential drive	500 kHz	2	1	1	1	1	1
	Open collector	200 kHz	5	2.5	2.5	2.5	2.5	2.5
	High speed differential drive	4Mhz	0.25	0.125	0.125	0.125	0.125	0.125

Please set >0.1μs for the duration between rising and falling edge of command pulse input signal.
1 revolution with 2500 pulses 2-phase pulse input when P00.07=0 or 2, P00.08 = 10000;
1 revolution with 10000 pulses 1-phase pulse input when P00.07=1 or 3, P00.08 = 10000

P05.32	Label	Max. command pulse input frequency			Valid mode(s)	P		
	Range	0~8000	Unit	kHz	Default	4100		
	Byte length	16bit	Attribute	R/W	485 address	0x0541		
	Valid	Immediate						
	Please set the max. frequency required for command pulse input. Er1B0 will occur, if command pulse input frequency exceeds P05.32.							

7.1.2 Electronic Gear Ratio

To realize correspondent motor rotational angle to arbitrarily set input command input by multiplying pulse command input from controller and coefficient of frequency divider/multiplier. Motor might not reach target velocity due to insufficient pulse output from controller. This function can be used to solve this issue by increasing pulse command frequency.

1. When P00.08 = 0, P00.09 and P00.10 will be valid. Other than that, P00.08 set value will be valid.
2. E-DHAS□□PF series supports 2 independent sets of electronic gear ratio. The 2 sets can be switched by delivering a command frequency divider/multiplier input DIV1. Both sets of electronic gear ratio is set up using P00.08, P00.09 and P00.10; P05.00, P05.01 and P05.02.

P00.08	**Label**	1st command pulse count per revolution			**Valid mode(s)**	**P**	**S**	**T**
	Range	0-67100864	**Unit**	PULSE	**Default**	10000		
	Byte length	32bit	**Attribute**	R/W	**485 address**	H: 0x0010 L: 0x0011		
	Valid	After restart						
	Control will affect if value set is too low. Err1b1 might occur if value < 500. (1) P00.08 valid when ≠ 0: Motor revolution = input pulse count / [P00.08 value] (2) P00.08 invalid when = 0: P00.09 and P00.10 valid.							
P00.09	**Label**	1st command frequency divider/multiplier numerator			**Valid mode(s)**	**P**		
	Range	1~2147483647	**Unit**	—	**Default**	1		
	Byte length	32bit	**Attribute**	R/W	**485 address**	H: 0x0012 L: 0x0013		
	Valid	After restart						
	Valid when P00.08 = 0, please refer to description in P00.10.							
P00.10	**Label**	1st command frequency divider/multiplier denominator			**Valid mode(s)**	**P**		
	Range	1~2147483647	**Unit**	—	**Default**	1		
	Byte length	32bit	**Attribute**	R/W	**485 address**	H: 0x0014 L: 0x0015		
	Valid	After restart						
	1. Settings： (1) Driver command pulse input count: X (2) Encoder pulse count after frequency divider/multiplier: Y (3) Encoder pulse count per revolution: Z (4) Motor revolution: W 2. Calculation： （1）X, Y Y = X * P00.09 / P00.10 Please keep the value of P00.09 and P00.10 to be smaller than 2^{24} (16777216). （2）Z Motor with 23-bit motor： $Z= 2^{23} = 8388608$ （3）Y, Z, W W = Y / Z *Performance cannot be guaranteed if frequency divider/multiplier ratio is set to extreme values. Err1b1 might occur if W < 500.*							

7.1.3 Position Command Filter

Position command filter is to filter position command after electronic gear ratio frequency dividing/multiplying. Including position command smoothing filter and position command FIR filter.

Position command filter should be added for the following cases:


1. Position command pulse from controller has not yet to undergo acceleration/deceleration (with steep acceleration/deceleration).
2. Low command pulse frequency
3. Electronic gear ratio = 10 times or above

Position command filter can smoothen position command and motor rotation will be more stable

P02.22	Label	Position command smoothing filter			Valid mode(s)	P		
	Range	0~32767	Unit	0.1ms	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x022D		
	Valid	At stop						

To set time constant of 1 time delay filter of position command.


To set time constant of 1 time delay filter, according to target velocity Vc square wave command as show below.

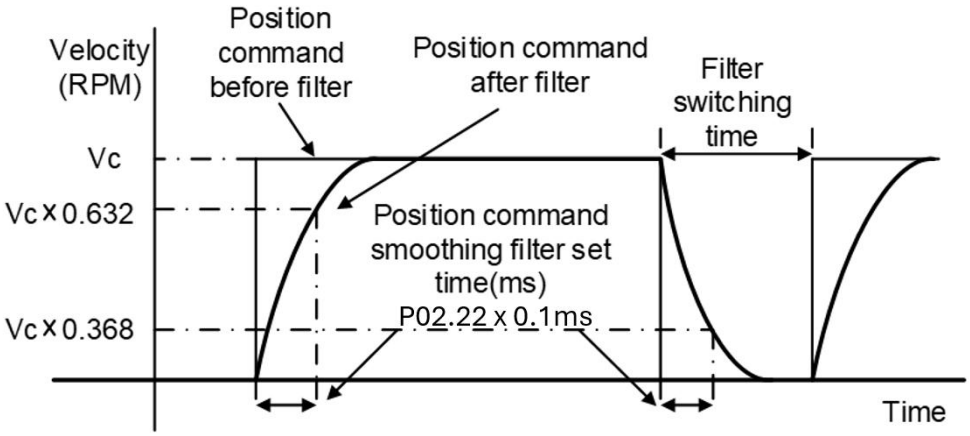


Usually applied when there is rather sharp acceleration which might cause motor overshoot or undershoot. To smoothen command signal, reduces impact to machines and eliminate vibration. If P02.22 is set too high, overall time will be lengthened.

P02.23	Label	Position command FIR filter			Valid mode(s)	P		
	Range	0~2500	Unit	0.1ms	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x022F		
	Valid	At stop						

As shown below, when target velocity Vc square wave command reaches Vc, it becomes trapezoidal wave after filtering.

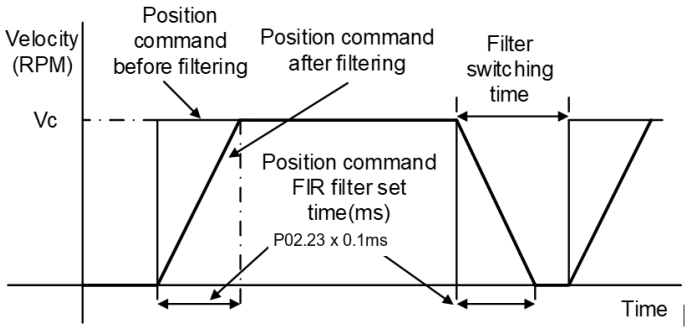

As shown below, when target velocity Vc trapezoidal command reaches Vc, it becomes S wave after filtering.

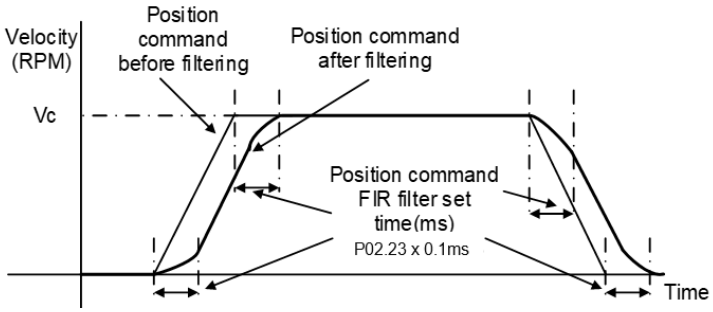

Usually applied when there is rather sharp acceleration which might cause motor overshoot or undershoot. To smoothen command signal, reduces impact to machines and eliminate vibration. If P02.23 is set too high, overall time will be lengthened.


Note: Please wait for command to stop and after filter idle time to modify P02.23.
Filter switching time = (P02.23 set value x 0.1ms + 0.25ms)

7.1.4 Frequency Divider Output

Frequency divider output indicates position command pulse or encoder feedback position pulse which is A and B phase pulse output.
Frequency divider output delivers motor encoder or external encoder position feedback to controller using ABZ phase pulses

***Encoder Z-signal width ≥ 62.5ms, or equivalent to an A/B signal cycle. If frequency divider output Z-signal width has to be widened, set through P05.43.*
**When P05.43 = 0, frequency divider Z-signal width is similar to width of single A/B cycle. If P05.43 = 1~500, set delay based on A/B cycle width.*

Value	Description
【0】	Z bandwidth equivalent to 1 cycle of A/B
1~500	Delay setting on top of A/B cycle width




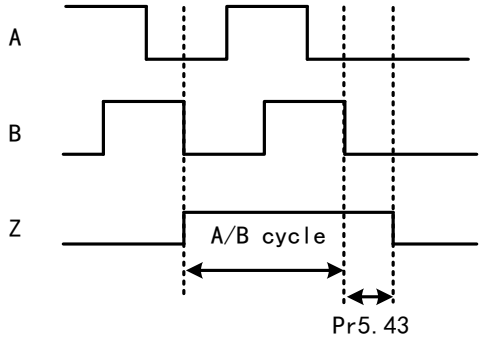


Related parameters

P00.11	**Label**	Encoder output pulse count per revolution			**Valid mode(s)**	**P**	**S**	**T**
	Range	1~32767	**Unit**	P/r	**Default**	2500		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0017		
	Valid	After restart						
	If P00.11 = 1000, encoder differential output signal per revolution = 4000 pulses							
P00.12	**Label**	Pulse output logic inversion			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~1	**Unit**	—	**Default**	0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0019		
	Valid	After restart						

To set phase B logic and output source from encoder pulse output. To inverse B-Phase pulse logic and change the relation between Phase A and Phase B

Pulse output logic inversion

P00.12	Phase B logic	CCW direction	CW direction
[0]	Not inverted		
[1]	Inverted		

P05.42	**Label**	Frequency divider output – Z-signal polarity			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~7	**Unit**	—	**Default**	0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0555		
	Valid	Disabled						

Bit	Polarity	Description
Bit0	0 = Positive 1 = Negative	Z polarity setting of frequency divider output and position comparison
Bit1	0 = Positive 1 = Negative	Only valid in position comparison. Polarity setting when phase A frequency divider as position comparison output
Bit2	0 = Positive	Only valid in position comparison. Polarity setting when phase B frequency divider as position comparison output

P05.44	**Label**	Frequency divider output source			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~4	**Unit**	—	**Default**	0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0559		
	Valid	After restart						

Value	Description
【0】	Position feedback of encoder #1(motor encoder)
1	Position feedback of encoder #2(external encoder)
2	Reserved
3	Pulse input command position synchronous output; position comparison not available in this mode
4	Frequency divider output prohibited

7.1.5 Positioning Completed INP Signal Output

INP signal output will be valid when position deviation is within the range when positioning is completed. Set unit in P05.20.

P04.31						
	Label	Positioning complete range			**Valid mode(s)**	**P**
	Range	0～10000	**Unit**	P05.21 set unit	**Default**	20
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x043F
	Valid	Immediate				

To set position deviation range of INP1 positioning completed output signal. INP1 output signal will be valid once position is complete within the range of deviation set.
Default unit: 0.00001rev. Can be set on P05.21 as command unit (pulse) or encoder unit (pulse)

P04.32						
	Label	Positioning complete output setting			**Valid mode(s)**	**P**
	Range	0~4	**Unit**	—	**Default**	1
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0441
	Valid	Immediate				

To set conditions for INP1 output signal to be valid

Value	Positioning completed signal
0	Signal valid when the position deviation is smaller than P04.31
1	Signal valid when there is no position command and position deviation is smaller than P04.31
2	Signal valid when there is no position command, zero-speed clamp detection (ZSP) signal is ON, and the positional deviation is smaller than P04.31
3	Signal valid when there is no position command and position deviation is smaller than P04.31. Signal ON when within the time set in P04.33 otherwise OFF.
4	When there is no command, position detection starts after the delay time set in P04.33. Signal valid when there is no position command and positional deviation is smaller than P04.31.

P04.33						
	Label	INP positioning delay time			**Valid mode(s)**	**P**
	Range	0~15000	**Unit**	1ms	**Default**	0
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0443
	Valid	Immediate				


Valid when P04.32 = 3.

Set value	Positioning completed signal
0	Indefinite delay time, signal ON until next position command
1-15000	OFF within the time set; ON after time set. Switch OFF after receiving next position command.


7.2 Velocity Control Mode

Velocity mode precisely controls motor rotational speed/direction using analog velocity command or internal related parameters. There are 4 types of velocity control modes for E-DHAS□□PF series AC Servo drivers: Analog control, internal velocity 4 speeds, internal velocity 8 speeds and analog + internal velocity control.


The basic velocity control flow chart shows as below:

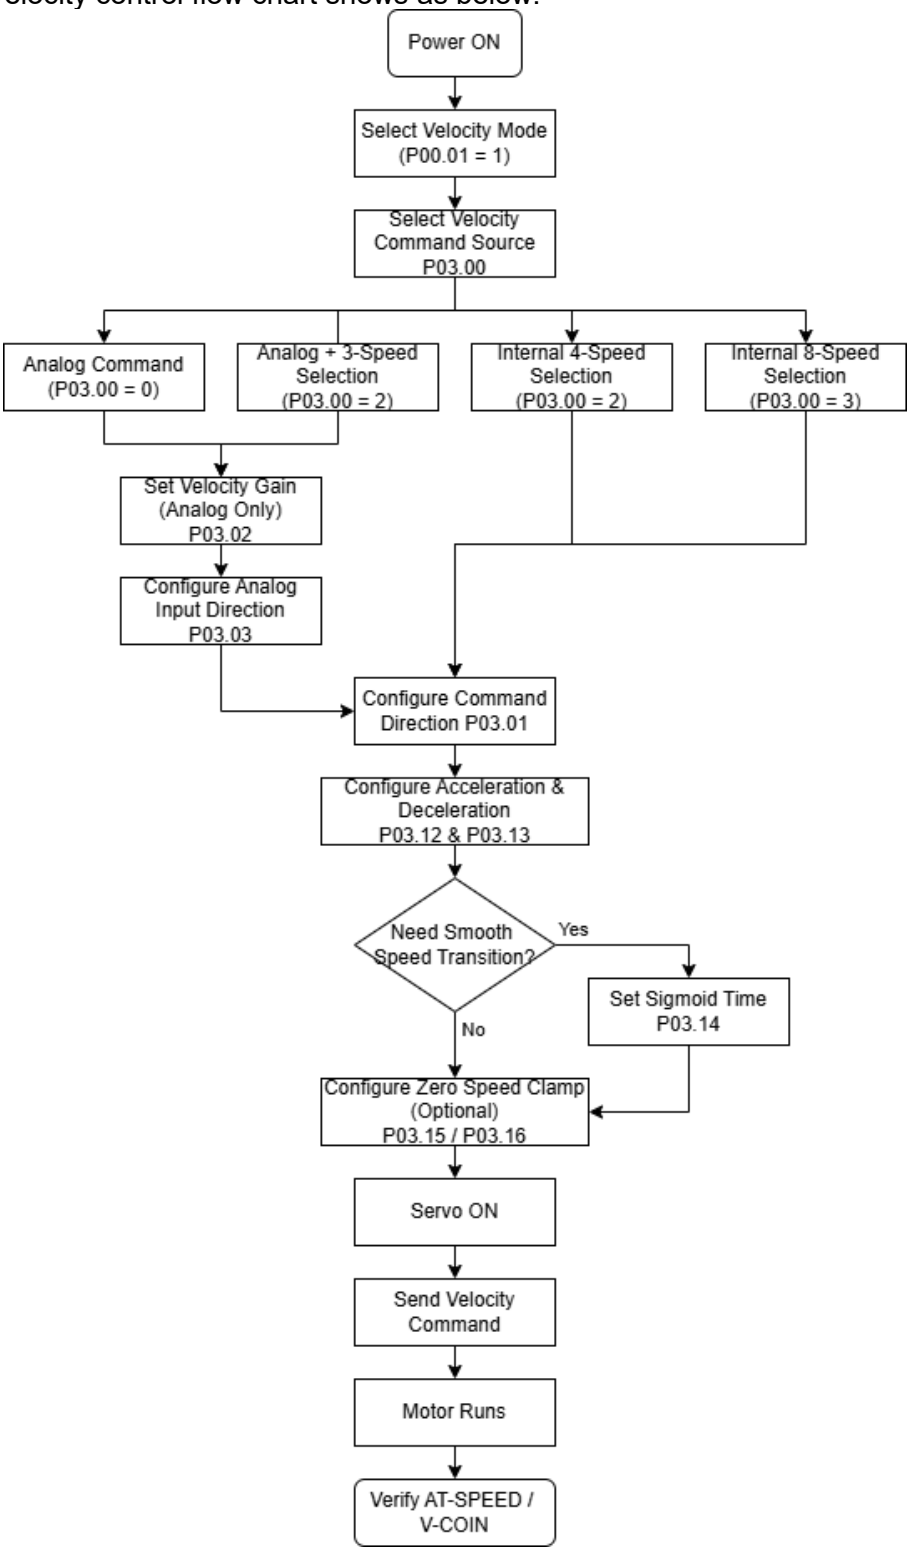

Set P00.01 = 1 to activate velocity control mode.

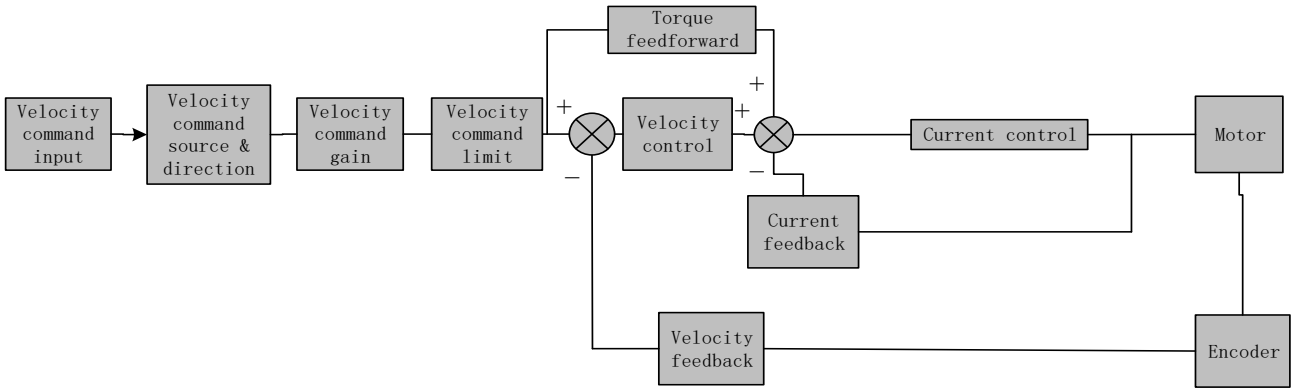


Please set related servo parameters according to the following diagram.

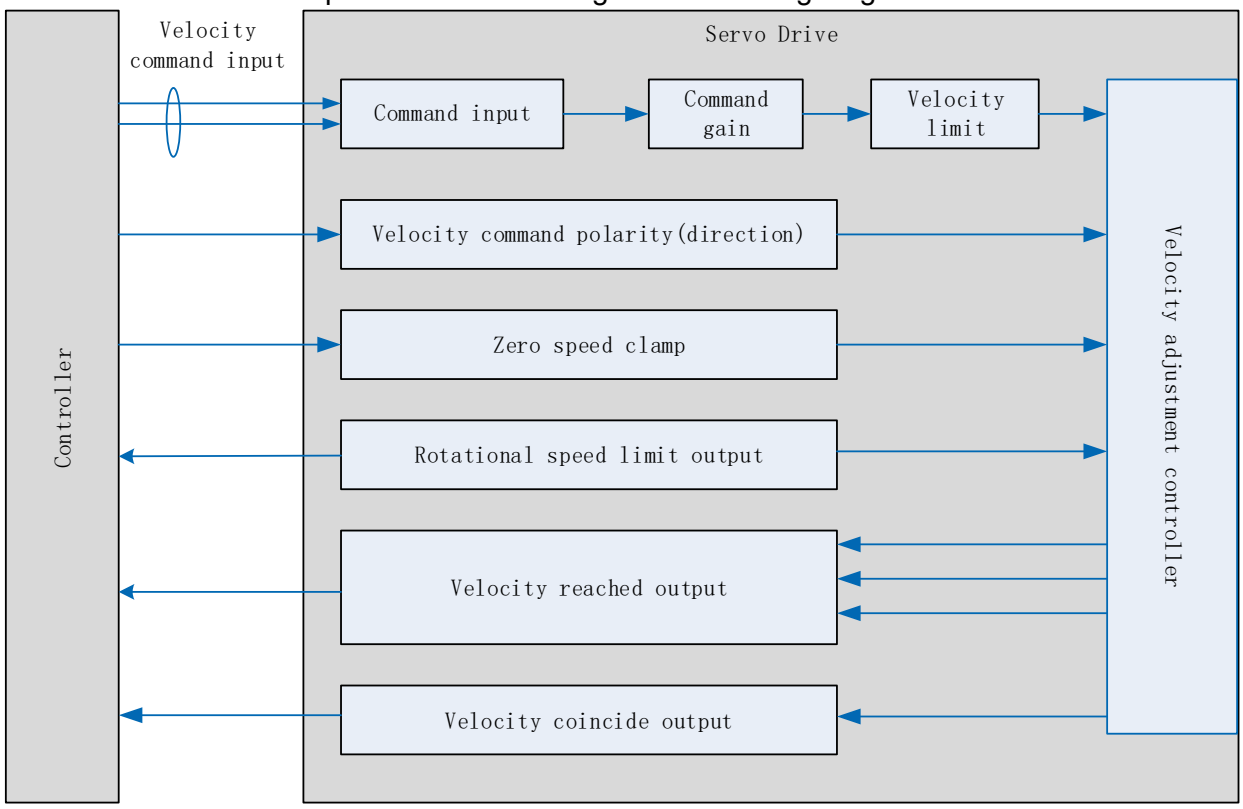

7.2.1 Velocity Command Input Control

Set velocity control mode in P03.00

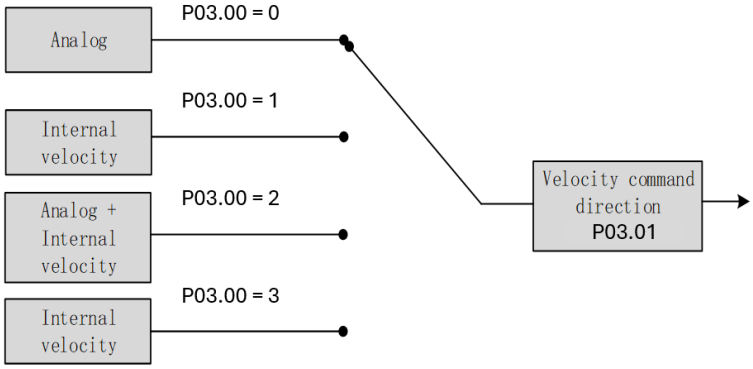


P03.00	Label	Velocity internal/external switching			Valid mode(s)	S
	Range	0~3	Unit	—	Default	1
	Byte length	16bit	Attribute	R/W	485 address	0x0301
	Valid	Immediate				

Connect to the right DI to control internal command velocity settings.


Value	Velocity settings
0	Analog - Velocity command（SPR）
【1】	Internal velocity settings 1st – 4th speed（P03.04～P03.07）
2	Internal velocity settings 1st – 3rd speed（P03.04～P3.06）、Analog velocity command（SPR）
3	Internal velocity settings 1st – 8th speed（P03.00～P03.11）

Value	Internal command velocity 1（INTSPD1）	Internal command velocity 2（INTSPD2）	Internal command velocity 3（INTSPD3）	Velocity command
1	OFF	OFF	No effect	1st speed
	ON	OFF		2nd speed
	OFF	ON		3rd speed
	ON	ON		4th speed
2	OFF	OFF	No effect	1st speed
	ON	OFF		2nd speed
	OFF	ON		3rd speed
	ON	ON		Simulated speed
3	Similar to P03.00=1		OFF	1st – 4th speed
	OFF	OFF	ON	5th speed
	ON	OFF	ON	6th speed
	OFF	ON	ON	7th speed
	ON	ON	ON	8th speed

Please change internal command velocity as per diagram below as unexpected axis movement might occur if 2 command velocities are changed at the same time.

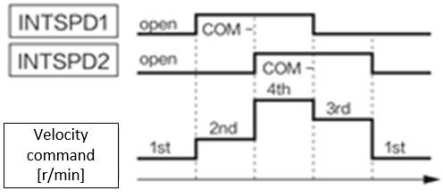

P03.00=1 / 2

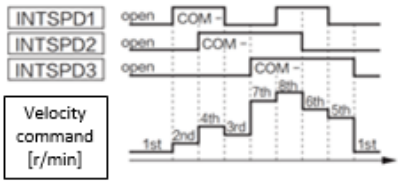

P03.00=3

Velocity command direction settings

Switch velocity command direction using I/O. Assign VC-SIGN to correspond DI terminal, velocity command direction will be in accordance with DI signal.

P03.01	Label	Velocity command rotational direction selection			Valid mode(s)	S
	Range	0~1	Unit	—	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0x0303
	Valid	Immediate				

To set positive/negative direction of velocity command

Value	Velocity settings（Analog or internal velocity）	Velocity command sign selection (VC-SIGN)	Velocity command direction
【0】	＋	No effect	Positive
	—	No effect	Negative
1	No effect	OFF	Positive
	No effect	ON	Negative

Velocity command input inversion

Set Analog-Velocity command (SPR) voltage polarity

P03.03	Label	Velocity command input inversion			Valid mode(s)	S
	Range	0~1	Unit	—	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0x0307
	Valid	Immediate				

To set voltage polarity of analog velocity command.
Only valid when P03.01 = 0. When P03.01 = 1, rotational direction is only related to VC-SIGN.

Value	Motor rotational direction	
【0】	Not inversed	「Positive voltage」→「Positive direction」 「Negative voltage」→「Negative direction」
1	Inversed	「Positive voltage」→「Positive direction」 「Negative voltage」→「Negative direction」

If there is an external position sensor with different polarity from P03.03, motor might undergo abnormal motion.

Velocity command input gain

Set Analog-Velocity command (SPR) voltage to motor velocity command switching gain

P03.02	Label	Velocity command input gain			Valid mode(s)	S
	Range	10~2000	Unit	(r/min)/V	Default	500
	Byte length	16bit	Attribute	R/W	485 address	0x0305
	Valid	Immediate				

To set gain changes from voltage added onto analog velocity command (SPR) to motor command velocity


P03.02 sets command input voltage and rotational speed slope.

Factory default:

P03.02=500(r/min)/V.

Hence 6V input: 3000 r/min

1. Do not supply more than ±10V power for analog velocity command (SPR).
2. If P03.02 set value is too large, it might cause vibration.

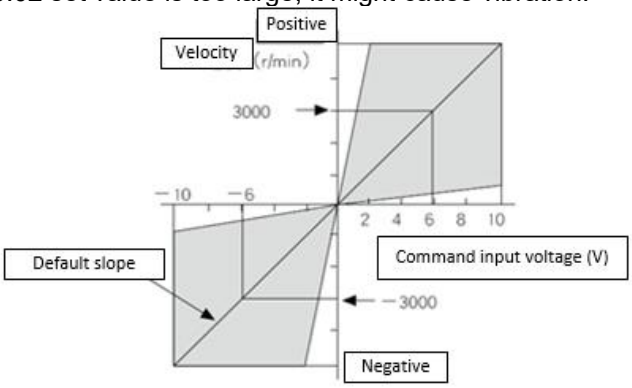

7.2.2 Velocity Command Acceleration/Deceleration

Acceleration/Deceleration is added onto velocity command input to control velocity. This function is valid when entering step-like velocity command or internal velocity settings is used to realize motor soft start. Use Sigmoid acceleration/deceleration to reduce vibration and impact due to changes in velocity.

P03.12	Label	Acceleration time settings			Valid mode(s)	S
	Range	0~10000	Unit	ms/ (1000rpm)	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0x0319
	Valid	Immediate				
P03.13	Label	Deceleration time settings			Valid mode(s)	S
	Range	0~10000	Unit	ms/ (1000rpm)	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0x031B
	Valid	Immediate				

Set max acceleration/deceleration for velocity command.

If target velocity = *x* [rpm], max acceleration = *a* [unit: rpm/ms], acceleration time = *t* [ms]


P03.12 = *1000/a (ms)*

P03.13 = *1000/a (ms)*

$a = x/t$

For example: If motor is to achieve 1500rpm in 30s, *a=1500/30=50rpm/ms*

P03.12 = 1000/*a*= *20.* Hence when P03.12 = 20, motor can achieve 1500rpm in 30s.

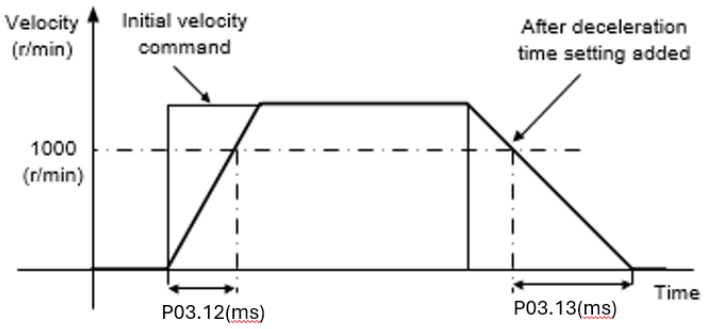


Usually used when there is rapid acceleration or trapezoidal wave velocity command due to many different internal speed segments under velocity control mode which causes instability while motor in motion.

Under velocity control mode, 6083 and 6084 is limited by P03.12 and P03.13 correspondingly.

P03.14	Label	Sigmoid acceleration/deceleration settings			Valid mode(s)		S
	Range	0~1000	Unit	ms	Default	0	
	Byte length	16bit	Attribute	R/W	485 address	0x031D	
	Valid	After restart					

To set sigmoid acceleration and deceleration turning point in accordance with P03.12 and P03.13.

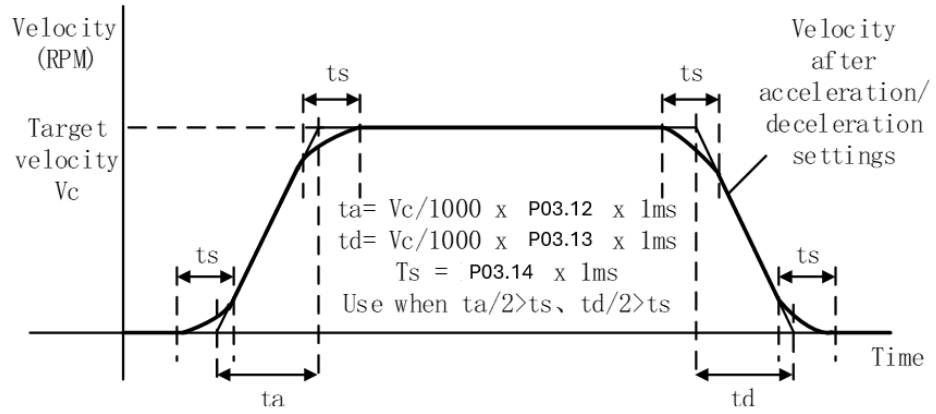


7.2.3 Velocity Reached Signal AT-SPEED Output

Velocity reached signal AT-SPEED output will be valid when motor velocity reached set speed in P04.36.
This output function can be assigned through I/O configurations, please refer to P04.10. When velocity matches set conditions, assigned I/O terminal will be ON, signal will be valid.

P04.36	Label	Arrival velocity			Valid mode(s)	S
	Range	10~2000	Unit	r/min	Default	1000
	Byte length	16bit	Attribute	R/W	485 address	0x0449
	Valid	Immediate				

When motor velocity > P04.36, AT-speed output signal is valid.
Detection using 10RPM hysteresis.

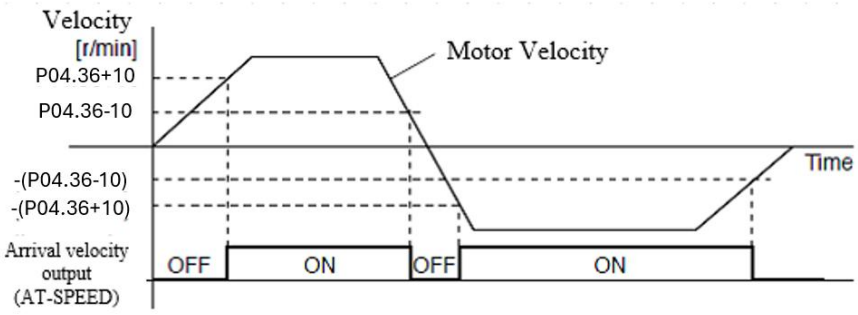

7.2.4 Velocity Coincidence V-COIN Signal Output

V-COIN signal output will be valid when velocity command (before acceleration/deceleration) coincides with motor velocity. Velocity is considered to be coincided if the difference between velocity command before acceleration/deceleration from servo driver and motor velocity is within the value set in P04.35.
This output function can be assigned through I/O configurations, please refer to P04.10. When velocity matches set conditions, assigned I/O terminal will be ON, signal will be valid.
In Position signal in PV mode is in synchronization with V-COIN signal.


P04.35	Label	Velocity coincidence range			Valid mode(s)	S
	Range	10~2000	Unit	r/min	Default	50
	Byte length	16bit	Attribute	R/W	485 address	0x0447
	Valid	Immediate				

If the difference between velocity command and motor actual speed is below P04.35, Velocity coincidence (V-COIN) output signal valid.

Due to 10RPM hysteresis:

Velocity coincidence output OFF -> ON timing (P04.35 -10) r/min

Velocity coincidence output ON -> OFF timing (P04.35 +10) r/min

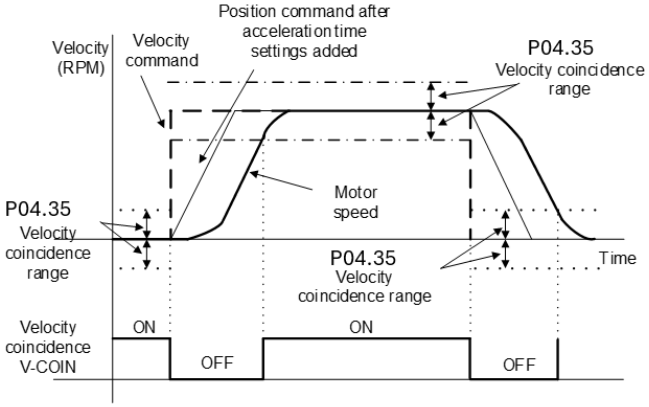

7.2.5 Zero Speed Clamp

Forced set velocity command to 0 using zero speed clamp to avoid servo axis from crawling at low velocity.
This input function can be assigned through I/O configurations, please refer to P04.00.

P03.15	Label	Zero speed clamp function selection			Valid mode(s)	S
	Range	0~3	Unit	—	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0x031F
	Valid	Immediate				


Value	Zero speed clamp function
0	Invalid: zero speed clamp deactivated
1	Velocity command is forced to 0 when the zero speed clamp (ZEROSPD) input signal is valid.
2	Velocity command is forced to 0 when actual velocity is lower than P03.16.
3	Includes conditions from 1 and 2

P03.16	Label	Zero speed clamp level			Valid mode(s)	S
	Range	10~2000	Unit	r/min	Default	30
	Byte length	16bit	Attribute	R/W	485 address	0x0321
	Valid	Immediate				
	Valid when P03.15 = 2/3, velocity command is forced to 0 when actual velocity is lower than P03.16 and after static time set in P03.23.					


7.3 Torque Control

Torque control mode is the size of motor asserted torque through external analogue input or directly from set value internally. This control mode is applicable where torque is the main control and limiting factor.


The basic torque control flow chart shows as below:

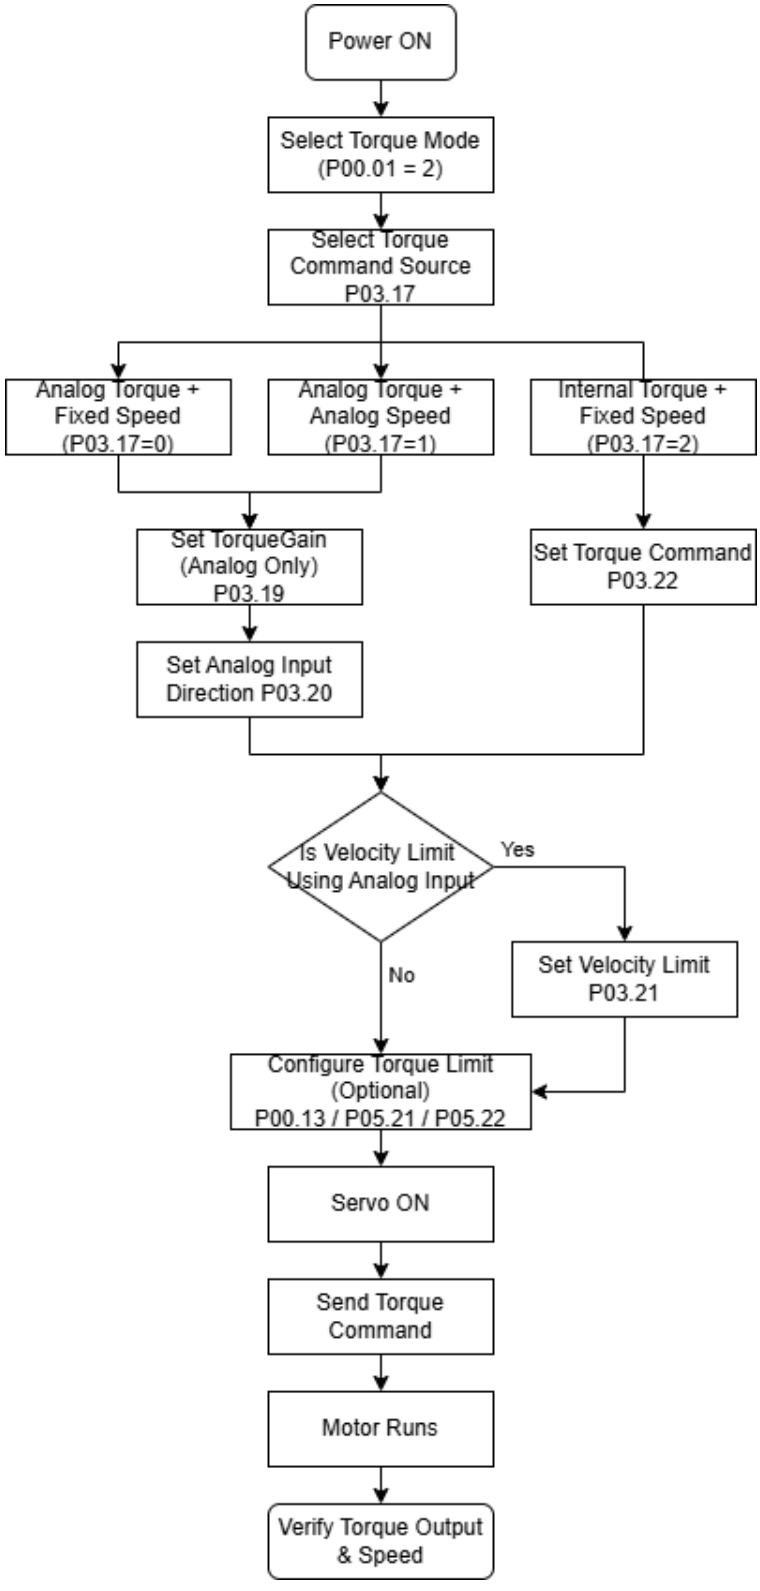

Set P00.01 = 2 to activate torque control mode.

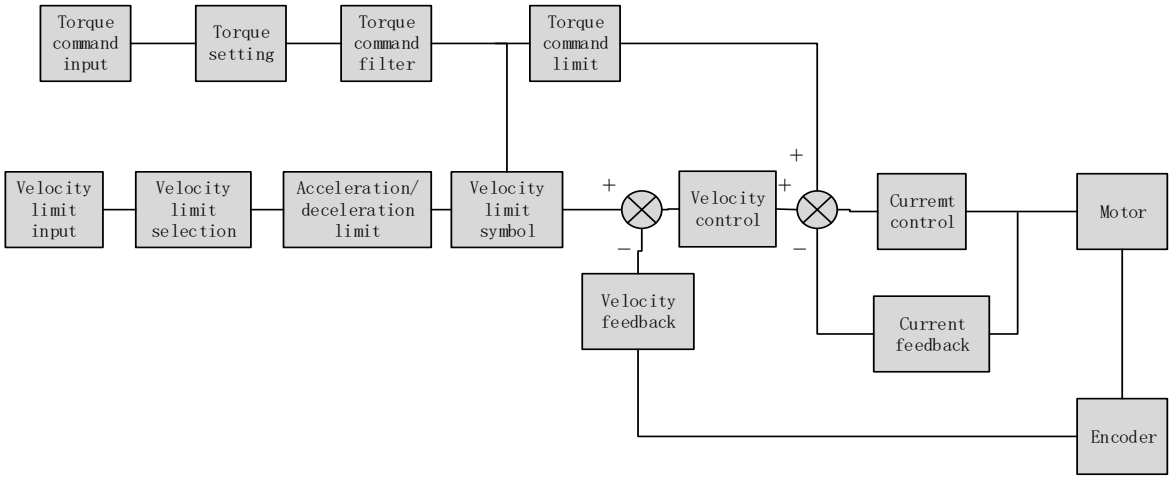


Using EDrive or front panel on servo driver, set P00.01 = 2 to activate torque control mode.
Please set related servo parameters according with the following diagram.

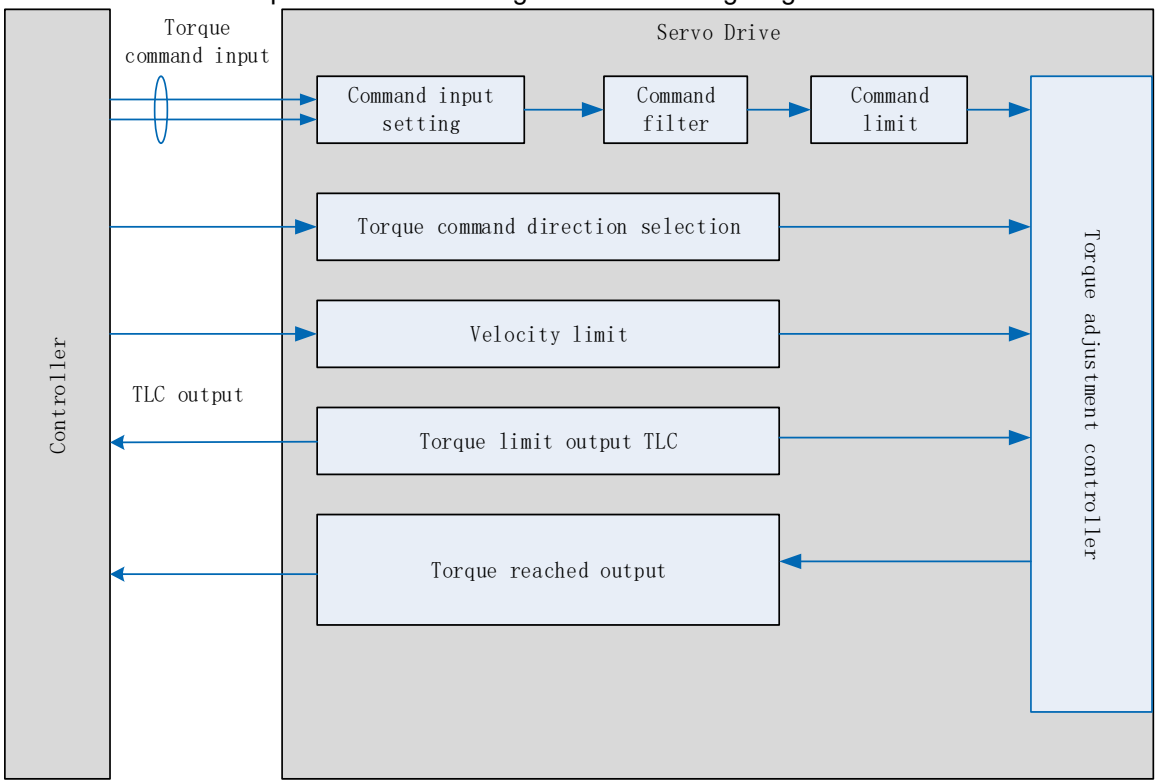

7.3.1 Torque Command Input Control

Torque control mode settings

Torque control mode includes 3 control modes as shown below. Set torque control mode in P03.17.

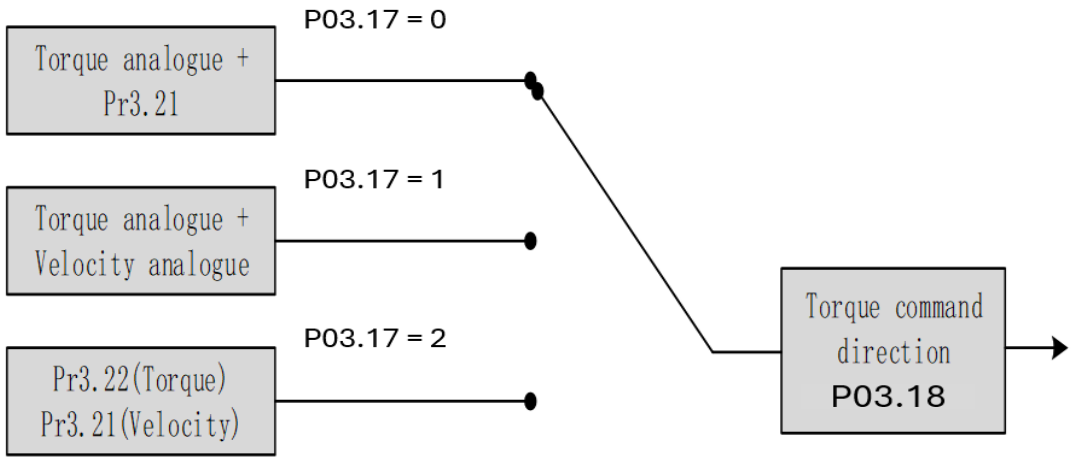

P03.17	Label	Torque internal/external switching			Valid mode(s)			T
	Range	0~3	Unit		Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0323		
	Valid	Immediate						

Value	Torque command input	Velocity limit input
【0】	Analog input 3(AI 3)	P03.21 set value
1	Analog input 3(AI 3)	Analog input 1(AI 1)
2	P03.22 set value	P03.21 set value

Torque command direction settings

To switch velocity command direction through DI. Assign TC-SIGN signal to corresponding DI terminal and determine velocity command direction through digital input signal.

P03.18	Label	Torque command direction selection			Valid mode(s)			T
	Range	0~1	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0325		
	Valid	Immediate						

To set torque command positive/negative direction

Value	Direction settings
【0】	TC-SIGN ON/OFF has no effect on torque direction Torque command input「Positive」→ Positive direction、 「Negative」→ Negative direction
1	Use TC-SIGN ON/OFF status for torque direction OFF: *Positive direction* ON: *Negative direction*

Torque command input inversion

To set the voltage polarity added onto analogue torque command (TRQR)

P03.20	Label	Torque command input inversion			Valid mode(s)			T
	Range	0~1	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0329		
	Valid	Immediate						

To set voltage polarity of analog torque command.
Only valid when P03.18 = 0.

Value	Motor torque direction	
【0】	Not inversed	「Positive voltage」→「Positive direction」 「Negative voltage」→「Negative direction」
1	Inversed	「Positive voltage」→「Positive direction」 「Negative voltage」→「Negative direction」


Torque command input gain

To set voltage added on to switching gain of motor torque command from analog torque command(TRQR)

P03.19	Label	Torque command input gain			Valid mode(s)			T
	Range	10~100	Unit	0.1V/100%	Default	30		
	Byte length	16bit	Attribute	R/W	485 address	0x0327		
	Valid	Immediate						

To set gain changes from voltage added onto analog torque command (TRQR) to torque command (%)

·Unit: (0.1V/100%)
·Set input voltage required for rated output torque.
·Default = 30， which is 3V/100%

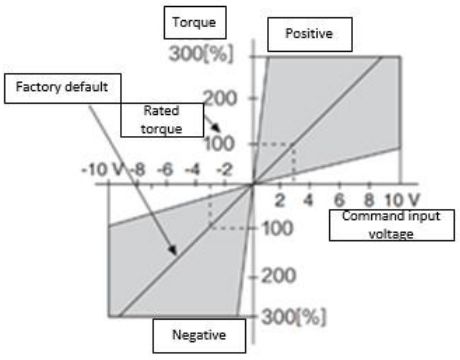

7.3.2 Torque Velocity Limit

To set velocity limit in torque mode for safety reasons.

P03.21	Label	Velocity limit in torque mode			Valid mode(s)			T
	Range	0~10000	Unit	r/min	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x032B		
	Valid	Immediate						
	To set velocity limit in torque control mode. Only valid when P03.17 = 0 / 2.							

P03.22	Label	Torque command			Valid mode(s)			T
	Range	0~300	Unit	%	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x032D		
	Valid	Immediate						
	To set torque limit in torque control mode. Only valid when P03.17 = 2. Please refer to P03.17.							

7.3.3 Torque Limit (TL-SEL)

This input function can be assigned through I/O configurations, please refer to P04.00.
To set torque limiting method.

P05.21	Label	Torque limit selection			Valid mode(s)	P	S	T
	Range	0~6	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x052B		
	Valid	Immediate						

Value		Limit
【0】		1st torque limit P00.13
1		2nd torque limitP05.22
2	TL-SEL OFF	P00.13
	TL-SEL ON	P05.22
3~4		Reserved
5		P00.13 →Positive torque limit P05.22 →Negative torque limit

P05.22	Label	2nd torque limit			Valid mode(s)	P	S	T
	Range	0~500	Unit	%	Default	300		
	Byte length	16bit	Attribute	R/W	485 address	0x052D		
	Valid	Immediate						

P05.22 is limited by max. torque set in motor parameter.

P00.13	Label	1st torque limit			Valid mode(s)	P	S	T
	Range	0~500	Unit	%	Default	350		
	Byte length	16bit	Attribute	R/W	485 address	0x001B		
	Valid	Immediate						

1st torque limit is set according to ratio percentage of motor rated current. Do not exceed max driver output current.

Please refer to P05.21 on how to set torque limit.

7.4 Hybrid Control Mode

Hybrid control mode is for servo driver to be able to switch between different modes during operation. Hybrid control mode consists of the 3 listed below:

- Position-velocity mode
- Position-torque mode
- Velocity-torque mode

Set P00.01 to select the hybrid control mode needed through EDrive or servo driver front panel.

P00.01	Label	Control Mode Settings			Valid mode(s)	P	S	T
	Range	0~10	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0003		
	Valid	After restart						

Value	Description	
	1st mode	2nd mode
【0】	Position	—
1	Velocity	—
2	Torque	—
3	Position	Velocity
4	Position	Torque
5	Velocity	Torque
6	PR internal command control	Position P00.22=1
		Velocity P00.22=1
		Torque P00.22=2
7~10	Reserved	

◆When 3, 4, 5, 6 combination hybrid mode, 1st and 2nd mode can be chosen accordingly with control mode switching input (C-MODE).
C-MODE: Invalid, select 1st mode.
C-MODE: Valid, select 2nd mode.
Please allow some time in between mode switching commands.

◆Please set P00.01 = 6 to switch to other modes from PR mode, then set 2nd mode using P00.22.

C-MODE is defaulted to Normally Open


When P00.01 = 3/4/5, please set assign C-MODE mode switching signal to one of the DI terminal and make sure the logic is valid.

Signal	Set value	Label	Description		
			P00.01	C-MODE	Control mode
C-MODE	0x5	Control mode switching	3	Invalid	Position mode
				Valid	Velocity mode
			4	Invalid	Position mode
				Valid	Torque mode
			5	Invalid	Velocity mode
				Valid	Torque mode

Chapter 8 Tuning


8.1 Gain Adjustment

In order for servo driver to execute commands from master device without delay and to optimize machine performance, gain adjustment has to be done yet.

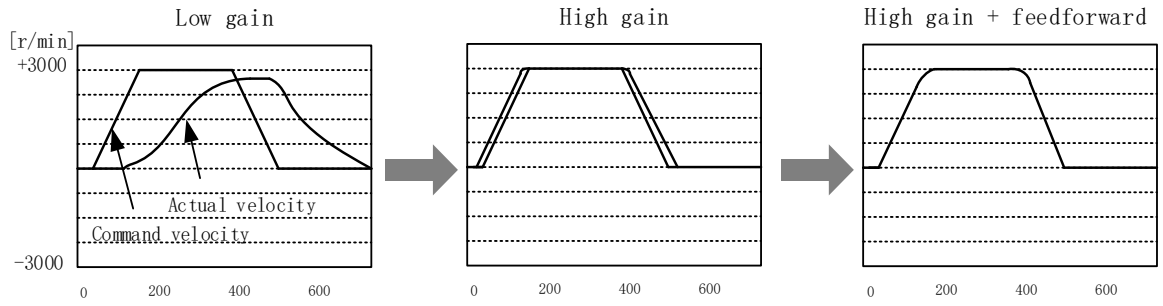

Position loop gain: 320 (0.1/s) **Velocity loop gain**: 180 (0.1Hz) **Velocity loop integral time constant**: 31ms	**Position loop gain**: 900 (0.1/s) **Velocity loop gain**: 500 (0.1Hz) **Velocity loop integral time constant**: 31ms	**Position loop gain**: 900 (0.1/s) **Velocity loop gain**: 500 (0.1Hz) **Velocity loop integral time constant**: 31ms

Servo driver gain adjustment is done in combination with a few other parameters (Inertia ratio, Position loop gain, Velocity loop gain and Filters settings). These parameters will have an effect on each other so it is always advisable to tune each parameter according in order to achieve optimal machine performance. Please refer to the steps below

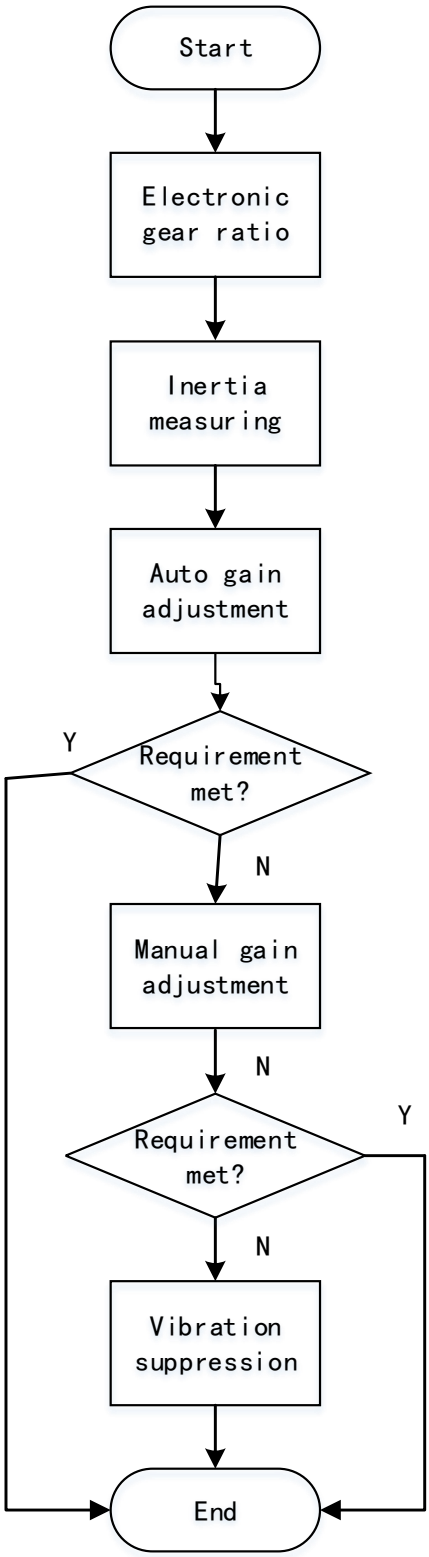

Gain adjustment flow chart

Steps	Functions	Explanation
Inertia ratio identification	Online	Motor moves with command from controller, servo driver will automatically calculate load-inertia ratio
	Offline	Using servo driver inertia determining function, servo driver can automatically calculate load-inertia ratio
Auto gain adjustment	Auto gain adjustment	Real time determining of mechanical load, gain value is set accordingly. 1. One-click tuning (Can be realized using EDrive. Auto tuning of gain and inertia according to actual data) 2. Real time auto adjustment (Set by selecting mechanical stiffness level, related gain parameters will be automatically adjusted accordingly)
Manual gain adjustment	Basic gain	On top of auto gain adjustment, manually adjust related parameters so that machine can have better responsiveness and following
	Basic steps	1. Gain related parameters tuning under position mode 2. Gain related parameters tuning under velocity mode 3. Gain related parameters tuning under torque mode
	Gain switching	• Gain switching through internal data or external signal. Lower vibration at stop, shorten tuning time, improve command following.
	Model following control	• Improve responsiveness, shorten positioning time (Only available in position mode)
	Command pulse filter	Set filter for position, velocity and torque command pulse.
	Gain feedforward	Enable feedforward function to improve following behavior
	Friction compensation	Reduce the effect of mechanical friction
	3rd gain switching	Based on usual gain switching function. Can be set to switch gain at stopping and reduce positioning time.
Vibration suppression	Mechanical resonance	Using notch filtering function to suppress mechanical resonance.
	End vibration suppression	To suppress low frequency vibration of mechanical end

8.2 Inertia Ratio Identification

Inertia ratio (P00.04) = Total mechanical load rotational inertia / Motor rotational inertia

Inertia ratio is an important parameter. Setting a suitable value can help with the precise tuning of the servo system. Inertia ratio can be set manually and also be determined automatically through servo driver

To make sure accurate inertia ratio identification

1. Max rotational velocity at 400rpm
2. Acceleration/deceleration time above 100ms
3. Stable load torque without large variation.


8.2.1 Online inertia determination

Enable motor using controller. Let motor run at above 400rpm, make sure there are acceleration, constant velocity and deceleration phase during the whole run. Cycle through 2-3 times to calculate load-inertia ratio. Result can be found on the front panel d16 or through EDrive system monitoring page. Enter the calculated value into P00.04 and save.

8.2.2 Offline inertia determination

Can be achieved through driver front panel or on EDrive
Please make sure:
1. Servo driver is disabled.
2. Axis is within safe and allowed range and limit switch is not triggered to prevent axis from over travelling.

Auxiliary function to determine inertia on front panel

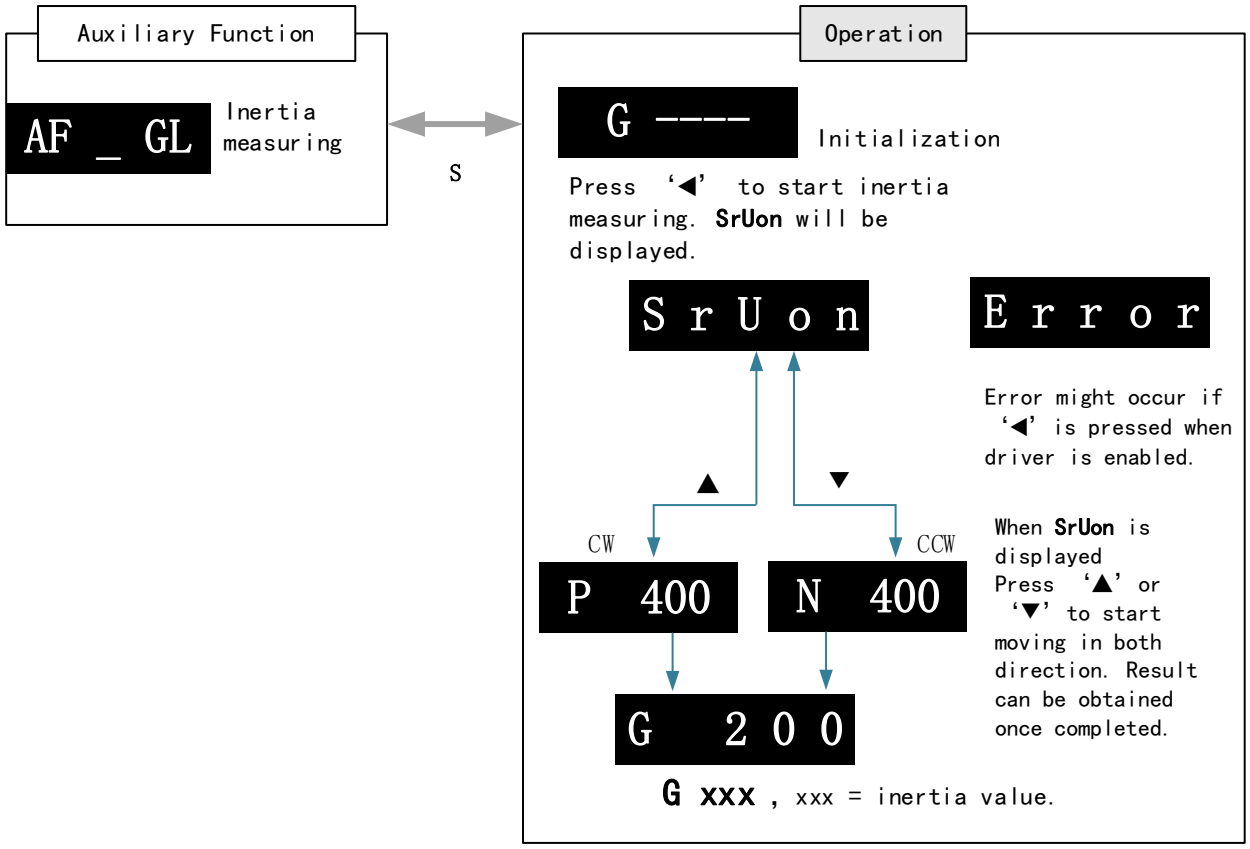


Steps:


1. Set the trial run velocity **P06.04**. Value set shouldn't be too large, please keep it at around **400 r/min**.
2. Enter **AF_GL** for auxiliary function – Inertia ratio determination into front panel
3. Press S once to enter. "**G---**" will be displayed on the front panel.
4. Press ◀ once to display "**StUon**"
5. Press ▲ or ▼ once to start to calculate the inertia.
6. After the calculation is done, G **xxx** will be displayed and **xxx** is the value of inertia calculated.
7. Write the corresponding value into P00.04. Please refer to parameter saving on servo driver.

Inertia measuring using EDrive


1) Open the inertia identification page, set jog speed (P06.04) and acceleration time (P06.25), then click **Download**.
2) Enable "Disable external enable", click **Servo Enable** to turn ON.
3) Use **Forward** and **Reverse** to move motor; click **Position 1** and **Position 2** to record two positions.
4) Set wait time (P06.21) and cycle count (P06.22), then click **Run** to execute movement.

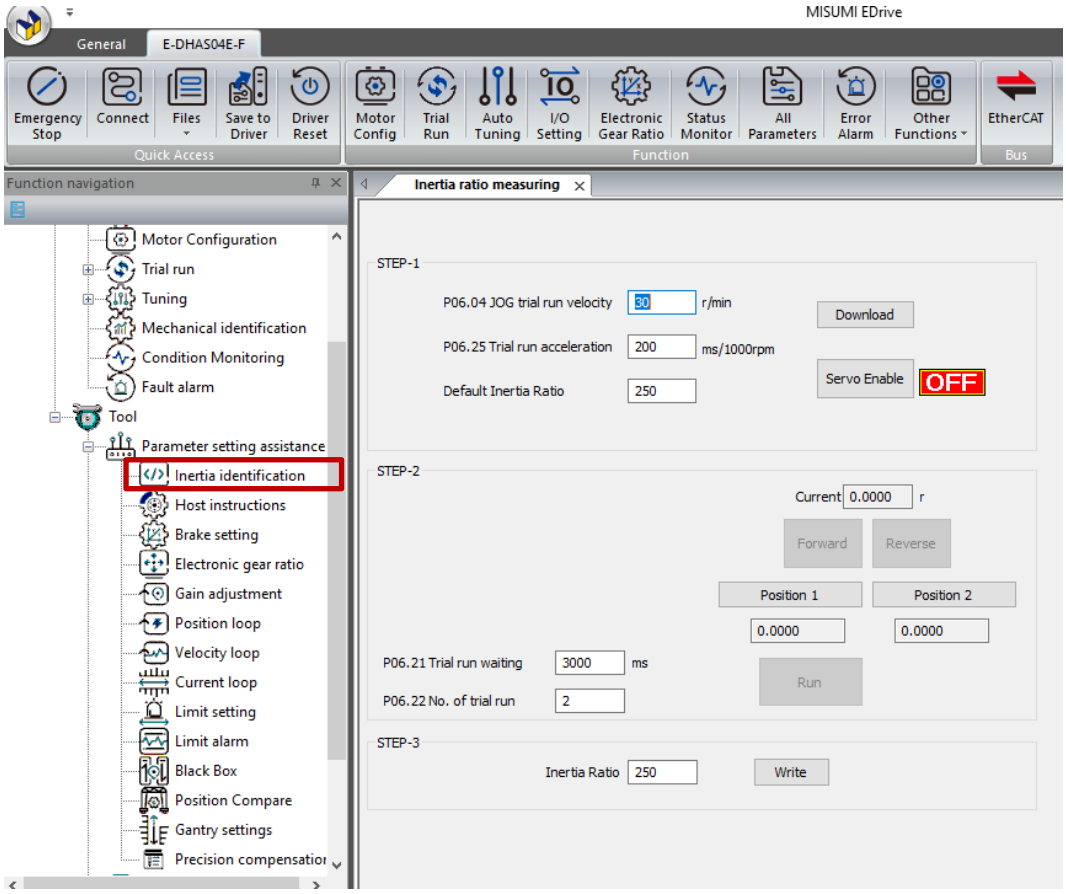

5) After completion, the system auto-calculates inertia ratio. Click **Write** to store.

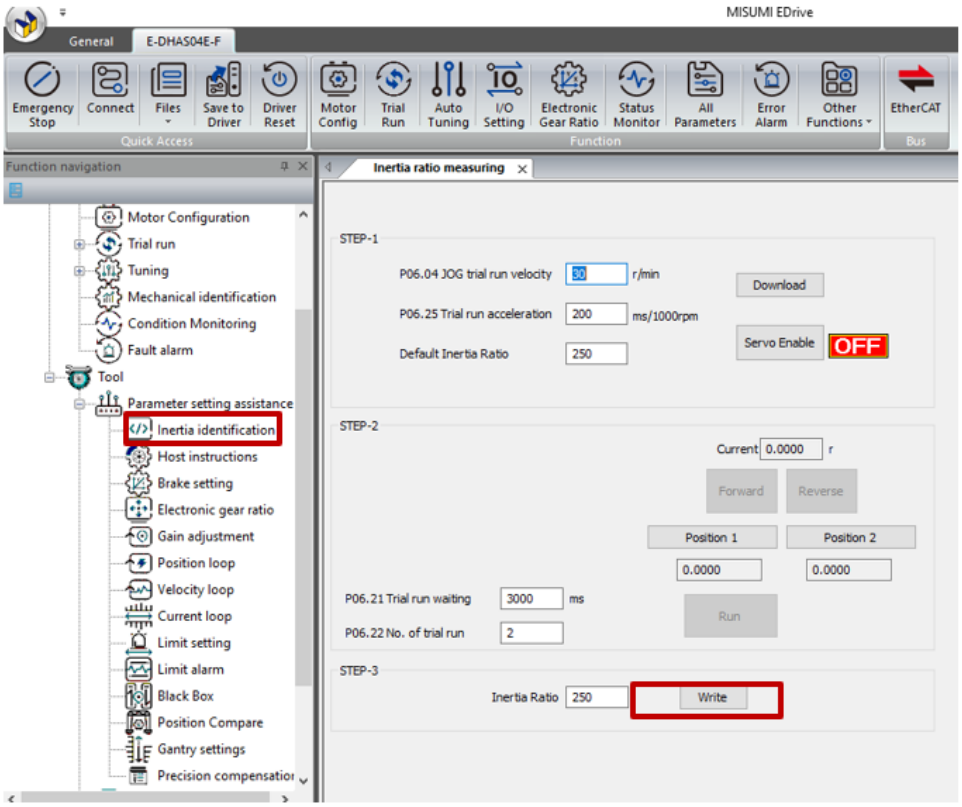

6) Open **Parameter Management**, confirm value saved to P00.04, then click **Save to Drive**

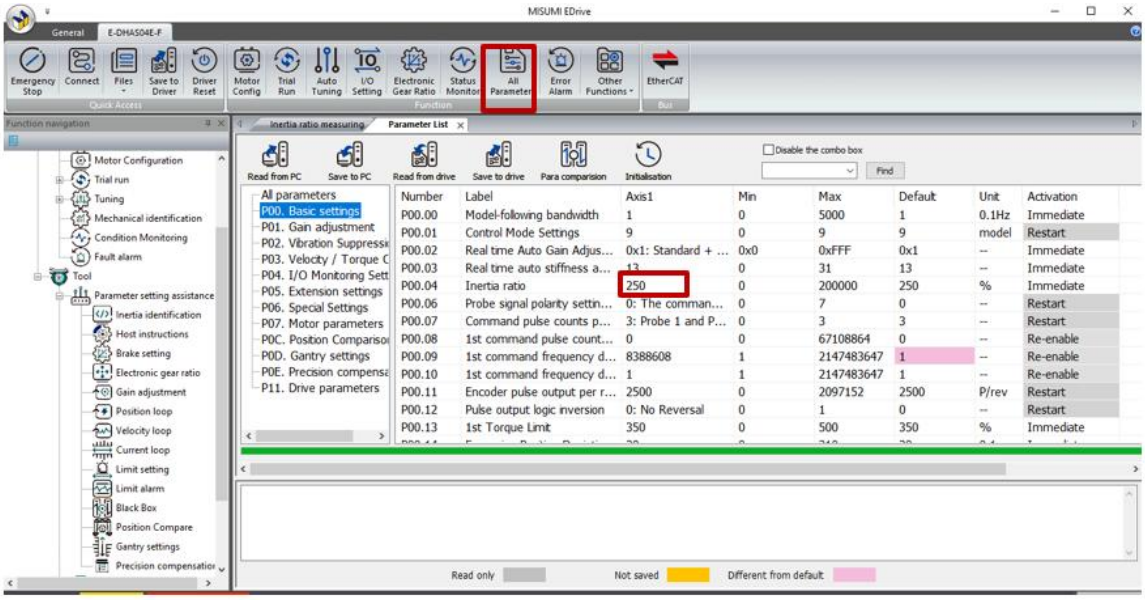

Please take note:

1. Trial run velocity and distance should be optimal to prevent any axis from bumping into objects.
2. It is recommended to move only in 1 direction for vertically mounted axis. Take precaution before moving the axis.
3. For applications with higher frictional drag, please set a minimal travel distance.

P00.04	Label	Inertia ratio			Valid mode(s)	P	S	T
	Range	0~20000	Unit	%	Default	250		
	Byte length	16bit	Attribute	R/W	485 address	0x0009		
	Valid	Immediate						

P00.04=(load inertia/motor rotational inertia)×100%

Set inertia ratio according to actual load inertia. When both are uniform, actual motor velocity loop responsiveness and gain settings will be consistent. If inertia ratio is greater than actual value, velocity loop gain settings will be higher and vice versa.
For motor with high inertia, P00.04 can be left unfilled but optimal setting of P00.04 could improve system performance

Common issues

Error	Cause	Solution
Inertia measuring failure	Loose load connection	Check for mechanical failure
	Measuring distance is too short	Increase measuring distance
	Belt load	Please pre-set an inertia ratio when using a belt to prevent jolt due to low inertia.


8.3 Easy Tuning

8.3.1 One-Click Tuning

This function is able to automatically tune the most optimal gain parameters for the specific applications after the axis is in operation and learning. Corresponding paths and responsiveness level need to be set before using this function. Please refer to the flow chart below. Parameter will be saved to parameters file and can be used on similar axes.
Recommended applications where inertia changes is minute.

	Recommended application scenarios
Control mode	Suitable in position mode or EtherCAT mode (Not applicable in other modes)
Others	• Make sure servo driver can't be enabled externally or any external command that can rotate the motor. Set range of movement, velocity and acceleration/deceleration time for one-click tuning. • Prohibit external command. Make sure there is no obstacle within the range of movement of the axis and motor can rotate freely.


	Factors affecting one-click tuning
Load inertia	• External load smaller or 30 times larger than rotor inertia • Drastic changes in load inertia during motion. • Under heavy load (more than 30 times inertia), please make sure of safety
Load	• Mechanical load is loosely connected. • Existence of gear backlash or any other non-linear factors • Complicated mechanical load structure
Motion	• Range of movement is too short or too long which cost the time to be overdue. • Not smaller than 0.5R

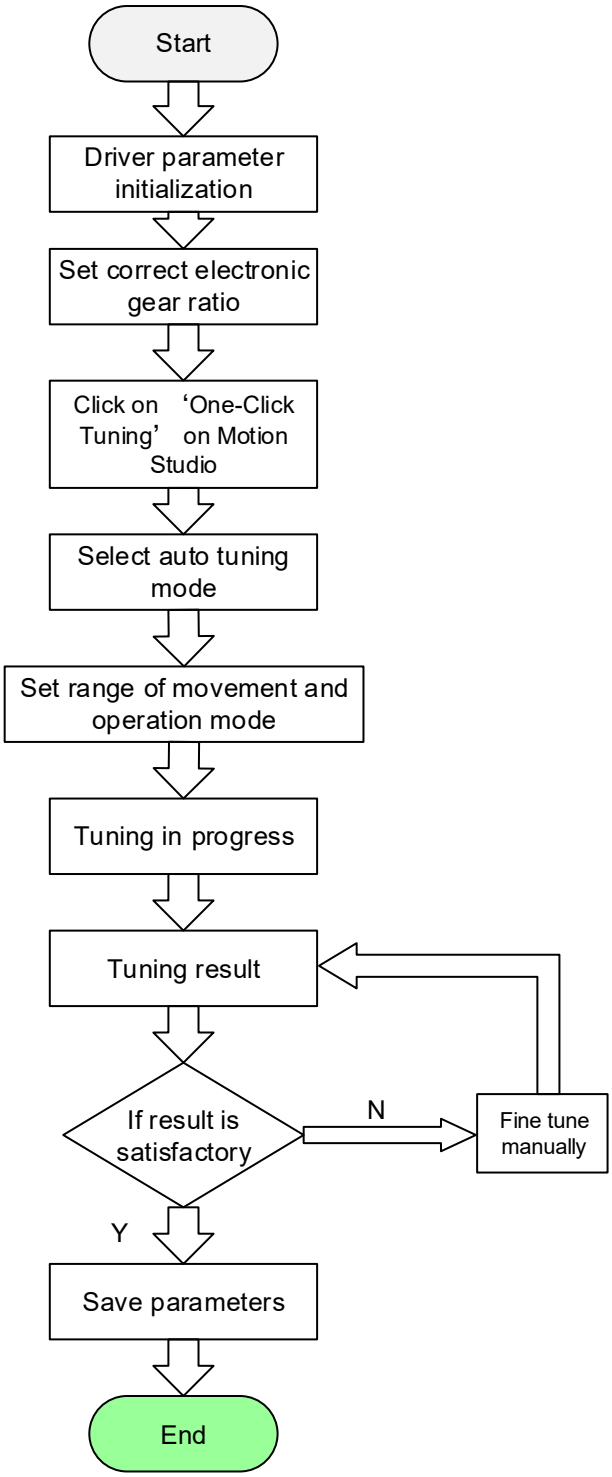


One-click tuning flow diagram

Operation Steps

1. Click ‘Auto Tuning’.

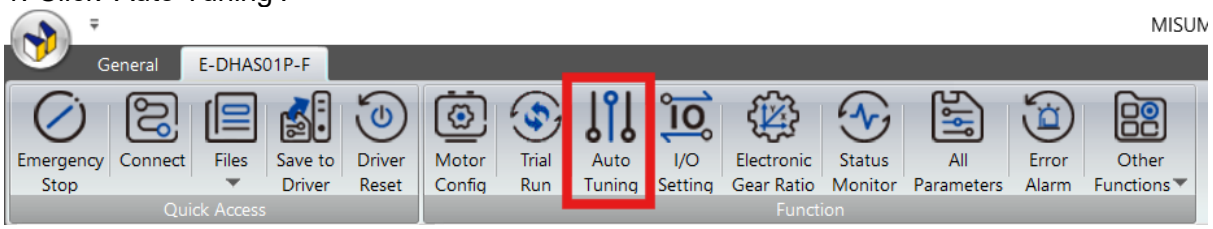


2. The first interface is for Tuning settings, which is mainly used to set the execution criteria for the auto-tuning process.
Tuning response: There are three types. Choose based on the actual mechanical conditions.
Tuning Mode: Two options are available — Positioning Mode and Track Mode.
You can also set the In Position Range.

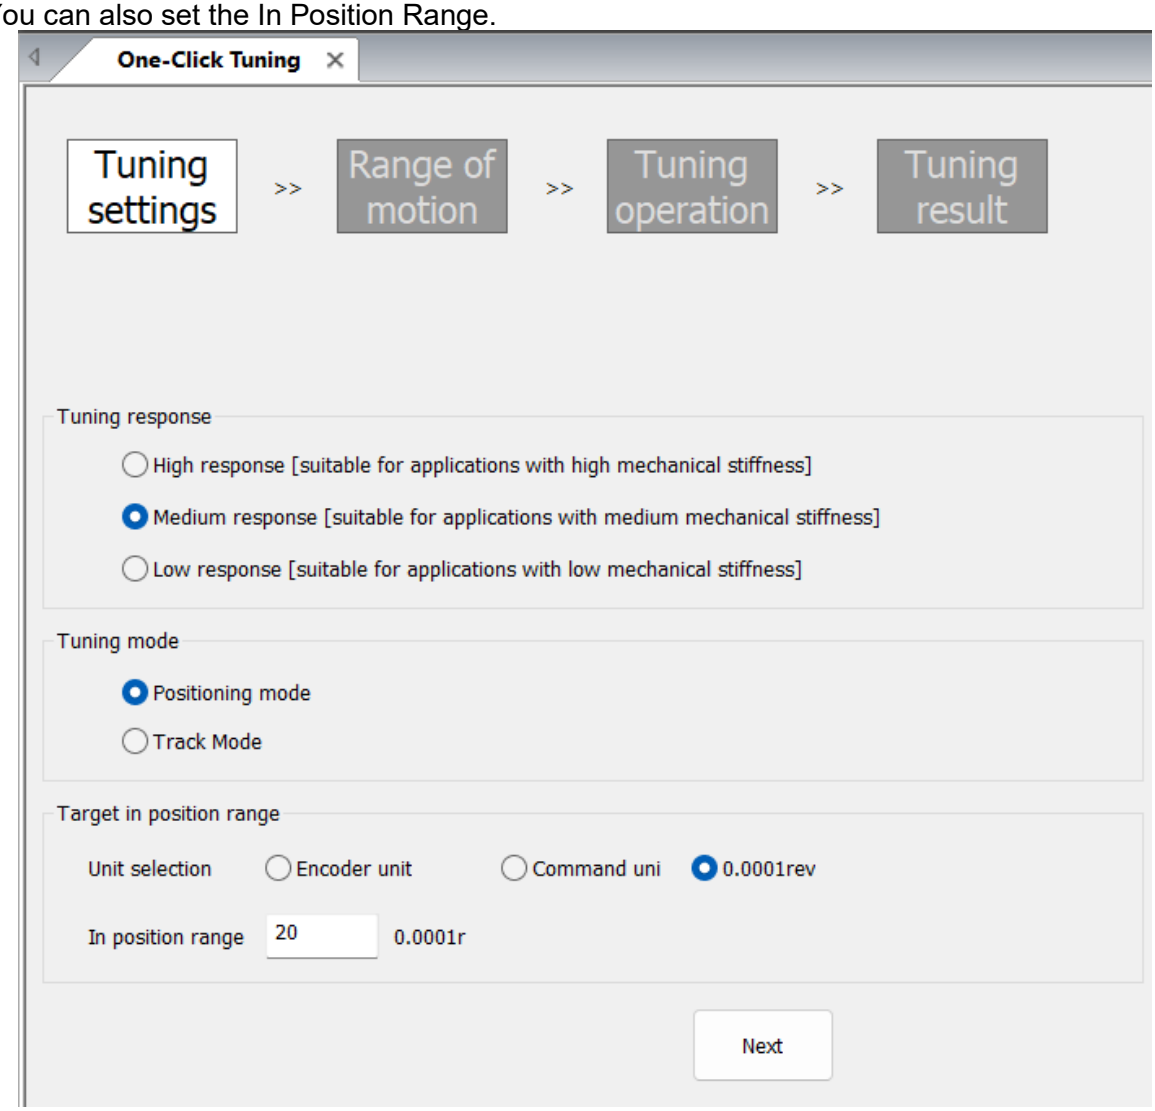

3. Clicking ‘Next’ go to the Range of motion interface and define the motion range for auto-tuning.
1) There are three mode selection. Choose based on the allowable movement direction of the actual machine.

- To and fro: The motor moves back and forth between the start and end positions.
- One way motion (Positive): The motor moves a distance equal to the absolute value of the difference between the start and end positions, maintaining forward rotation.

- One way motion (Negative): The motor moves a distance equal to the absolute value of the difference between the start and end positions, maintaining reverse rotation.

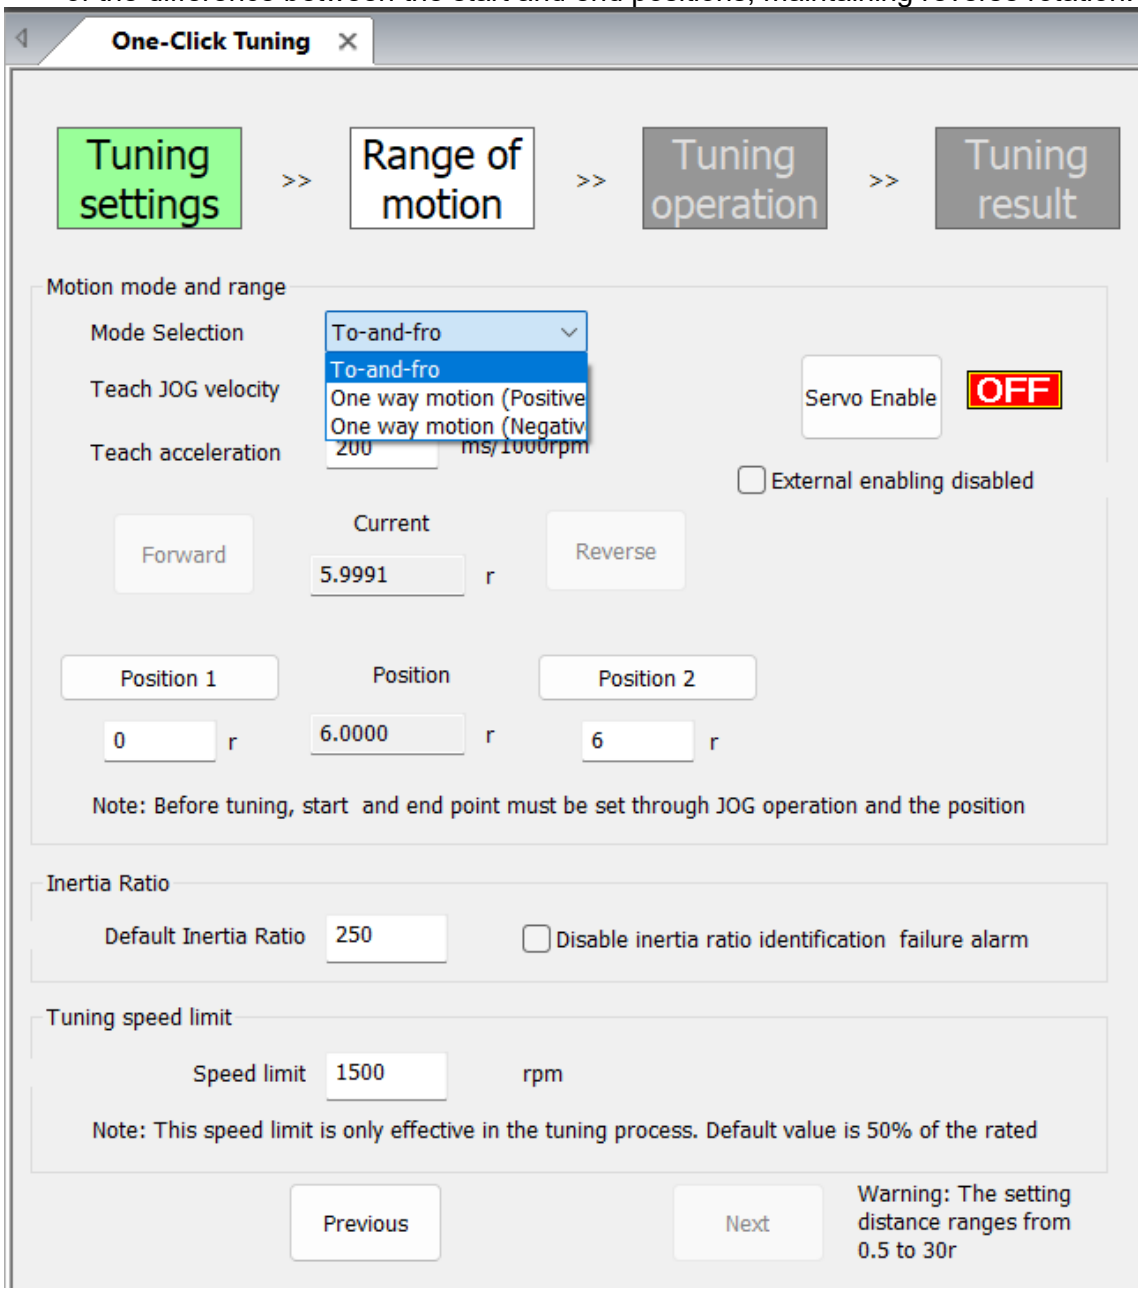

2) There are two methods to set the start and end positions:

- After Servo Enable, use the forward/reverse buttons to adjust the position. Click the "Position 1/2" button to complete the setup.

Note:


- *During motion range setting, jog speed should be between 0–200 rpm. Acceleration time should not be too short to avoid collisions. After setting speed properties, disable external enable signals. Before enabling the servo, ensure no commands are being sent to avoid unintended movement. Then click servo enable.*

- Directly input the start and end positions. After entering the values, press Enter to apply the changes. (In reciprocating motion, the motor will first move to the set start position before beginning the reciprocating motion. When manually entering positions, ensure there is no risk of collision.)

Note:


- *The difference between start and end positions must be greater than 0.5 revolutions. The closer the start/end points match the actual application stroke, the better the tuning adaptability. However, tuning time may increase accordingly.*

3) Inertia Ratio:
Can choose to ignore inertia identification failures to prevent tuning failure due to unsuccessful identification.
The inertia ratio can be manually entered or preset to a suitable value. This helps avoid shaking in belt-driven systems caused by low inertia.




4) Tuning Speed Limit:
The speed during tuning must be no less than 400 rpm.


4. Click ‘Next’ and confirm that the motion is safe to enter the Tuning Operation interface. The tuning process will begin, with progress display and an emergency stop button available during the operation.

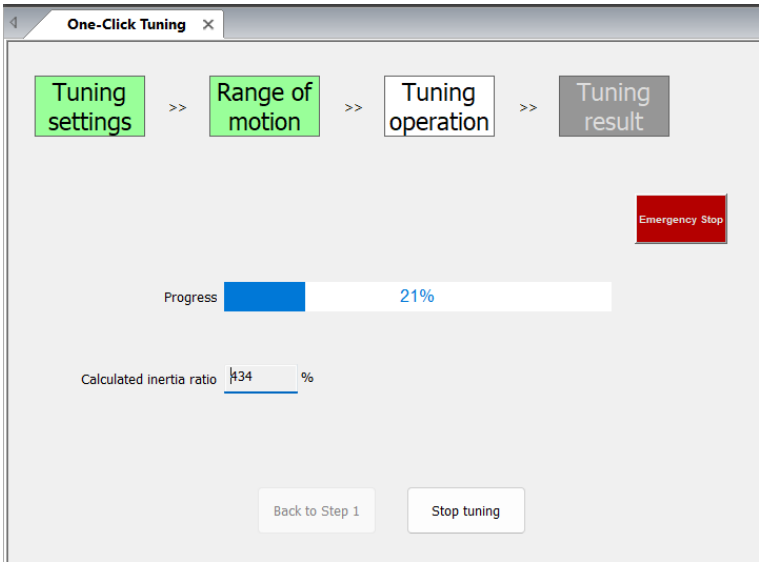

5. After tuning is complete, the system will transition to the Tuning Results interface, shows the tuning results and parameters comparison before and after tuning.
1) Tuning result:

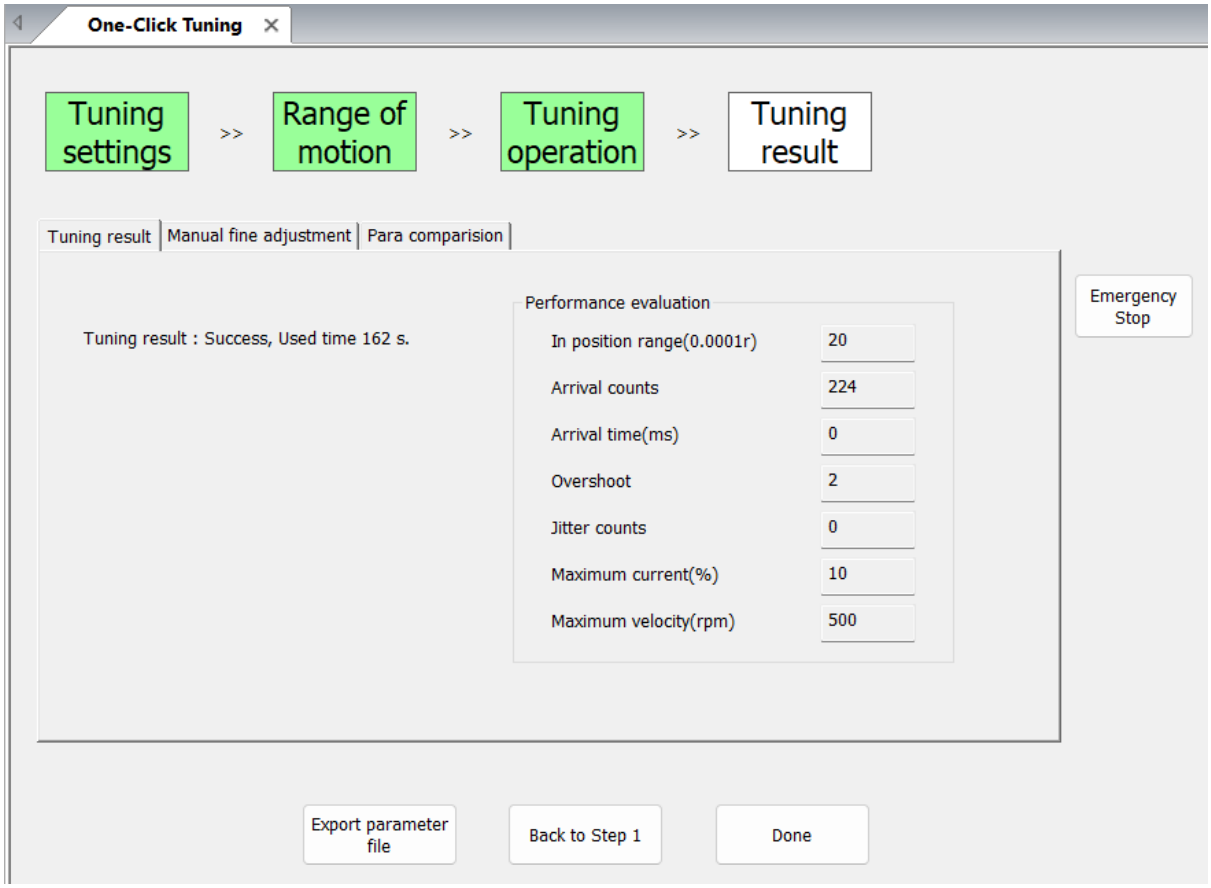


2) Para comparison:

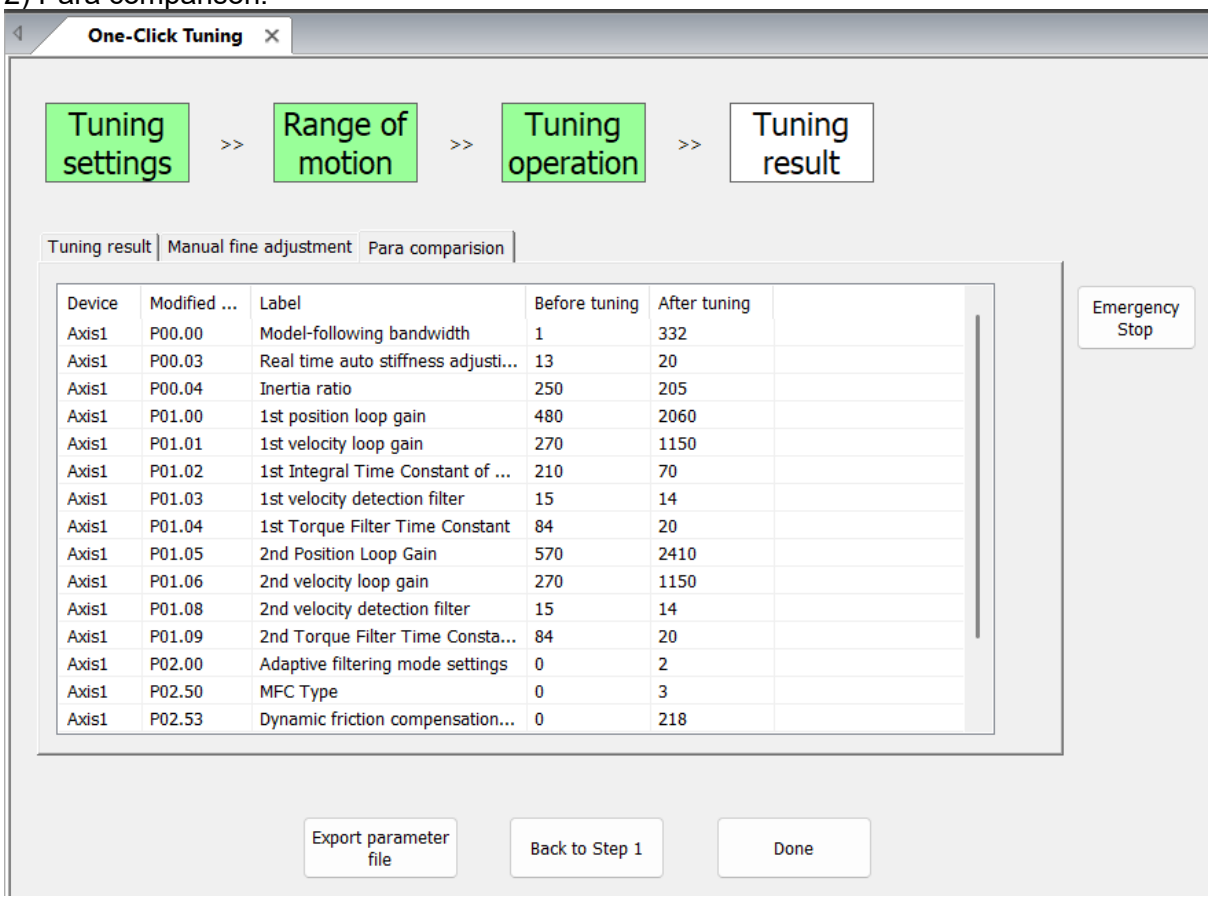


If fine-tun is needed, can enter Manual fine adjustment to modify the gain.

3) Manual fine adjustment:

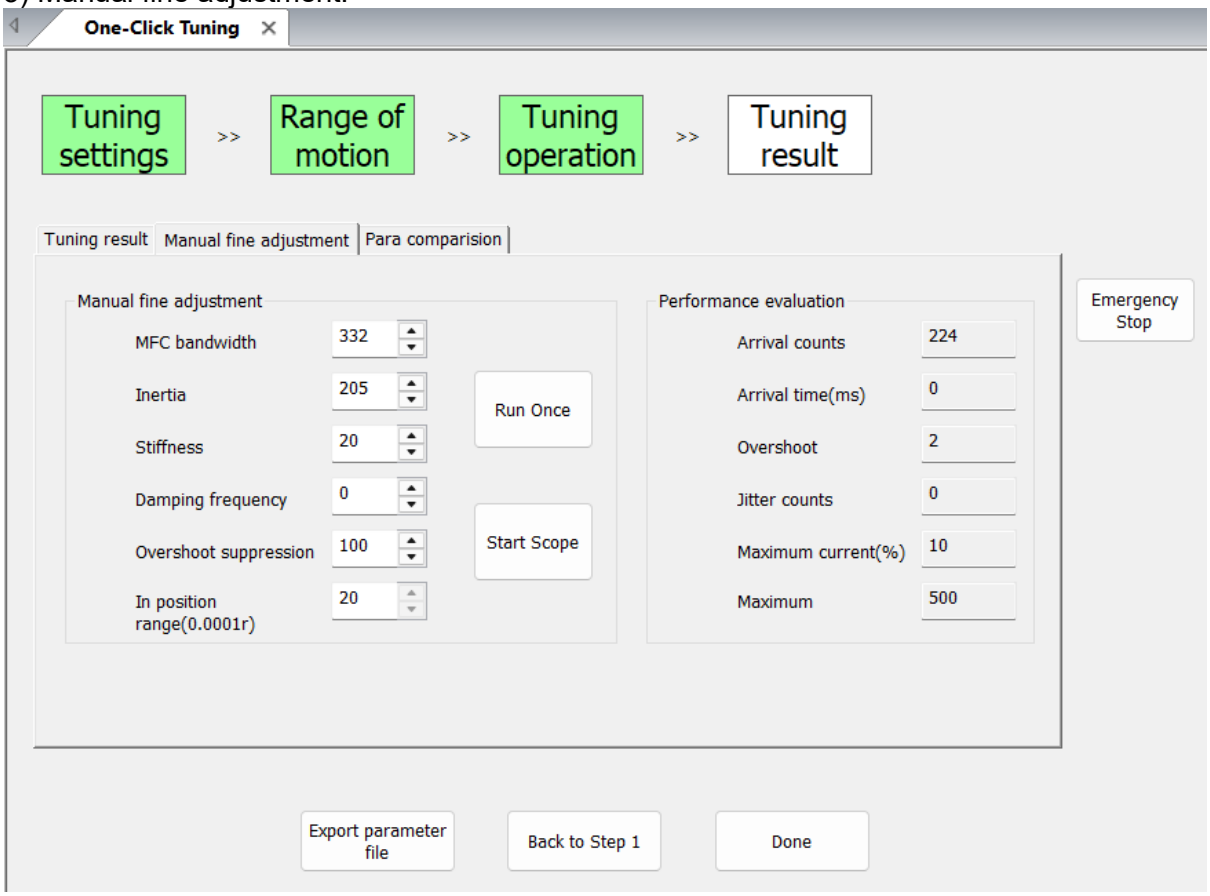

After modifying parameters, run the motor again to evaluate performance or use the oscilloscope to check if the results meet actual requirements.
If satisfied with the tuning results, click ‘Done’, and a prompt will appear asking whether to save the parameters.

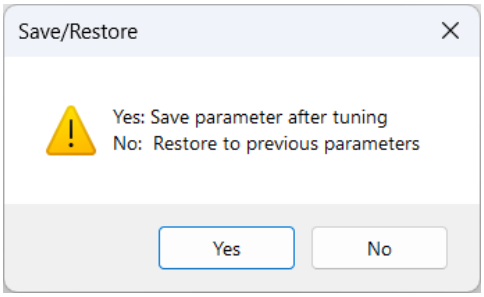

Click ‘Yes’ to save the tuned parameters. Click ‘No’ to revert to the parameters before tuning.
Note:

- *Regardless of whether you click Yes or No, clicking ‘Done’ will exit the One-Key Auto Tuning Interface.*

Precautions

- Vertical Axis Applications: Ensure anti-drop measures are in place before executing any actions.
- Belt Applications: Pre-setting a moderate inertia ratio can prevent shaking caused by low inertia at the start of auto-tuning.
- Ball Screw Applications: If tuning takes too long, consider shortening the stroke.

Common Tuning Failures

Issue	Cause	Solution
Inertia Identification Failure	Lose mechanical connections	Inspect and fix mechanical issues
	Stroke too short, inertia identification fails	Increase stroke appropriately
	Belt-driven load	Pre-set a suitable inertia ratio to avoid low inertia causes shaking and identification failure

If the tuning results are not satisfactory, you can switch to Single parameter tuning for more advanced adjustments to achieve optimal gain settings.

8.3.2 Single Parameter Tuning


Set a mechanical stiffness level and the driver will automatically tune the parameters, accordingly, including inertia measuring and vibration suppression to fulfill responsiveness and stability needs. At same time, more advanced functions can be applied, for example: Command pulse filter, low frequency vibration suppression, etc.
Recommended applications where inertia changes is minute. Single parameter tuning is more complicated to set up compared to one-click tuning. Use single parameter tuning when one-click tuning doesn't fulfill the needs.

	Recommended application scenarios
Control mode	Suitable in position mode or EtherCAT mode (Not applicable in other modes)
Others	• Servo ON (SRV-ON) status • Set suitable position/torque limit so that motor can run normally • Use trial run or any external controller to make sure no clash of axes


	Factors affecting single parameter tuning
Load inertia	• External load smaller or 30 times larger than rotor inertia • Inertia measuring might fail upon changes in load inertia • Load torque changes drastically
Load	• Mechanical stiffness is too low • Existence of gear backlash or any other non-linear factors • Complicated mechanical load structure
Motion	• Low speed, no more than 300[r/min]. • Acceleration/deceleration time too long, more than = 600ms • Speed > 300r/min, acceleration/deceleration time < 600ms but travelling time duration < 50ms.

Operation Steps


1. Open the wizard. Select the Manual Tuning function. The interface will appear as shown, with Inertia Auto Identification and Vibration Auto Identification enabled by default.
If rigidity parameter P00.03 is greater than 11, and low rigidity is selected, the initial rigidity will be set to 11 upon entering manual tuning.

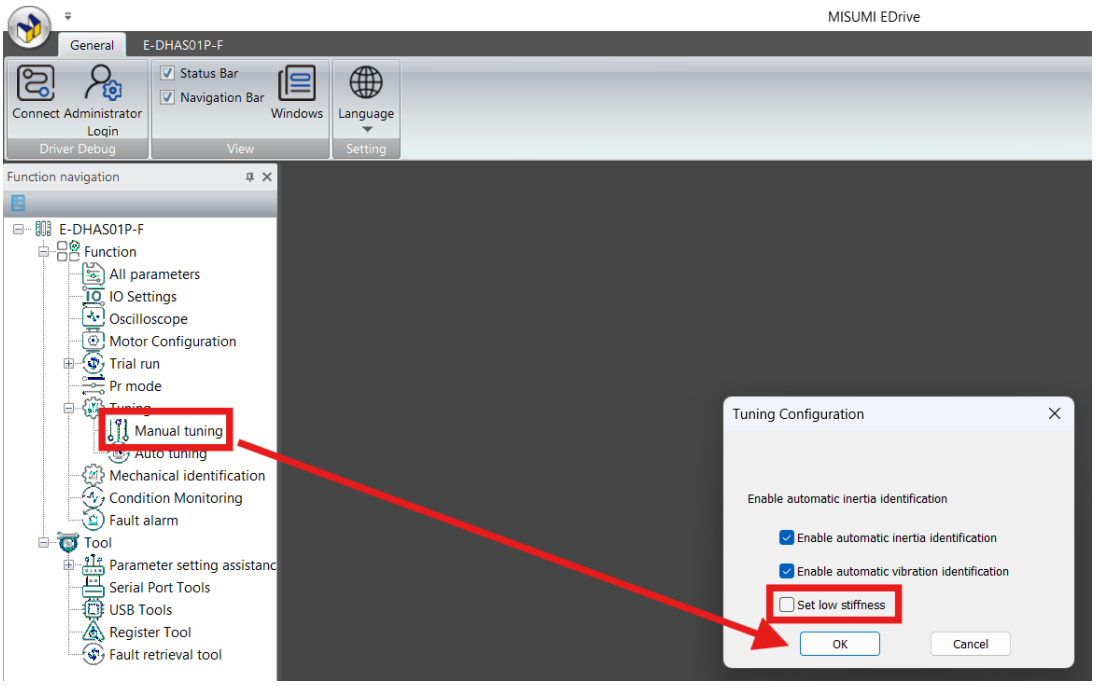

2. Manual tuning interface. In Simple Settings, set MFC Bandwidth to 1 for automatic model-following bandwidth adjustment. You can also manually set other values.
If no advanced parameters need adjustment, you can use the Trial Run function or send commands from the host to rotate the motor.

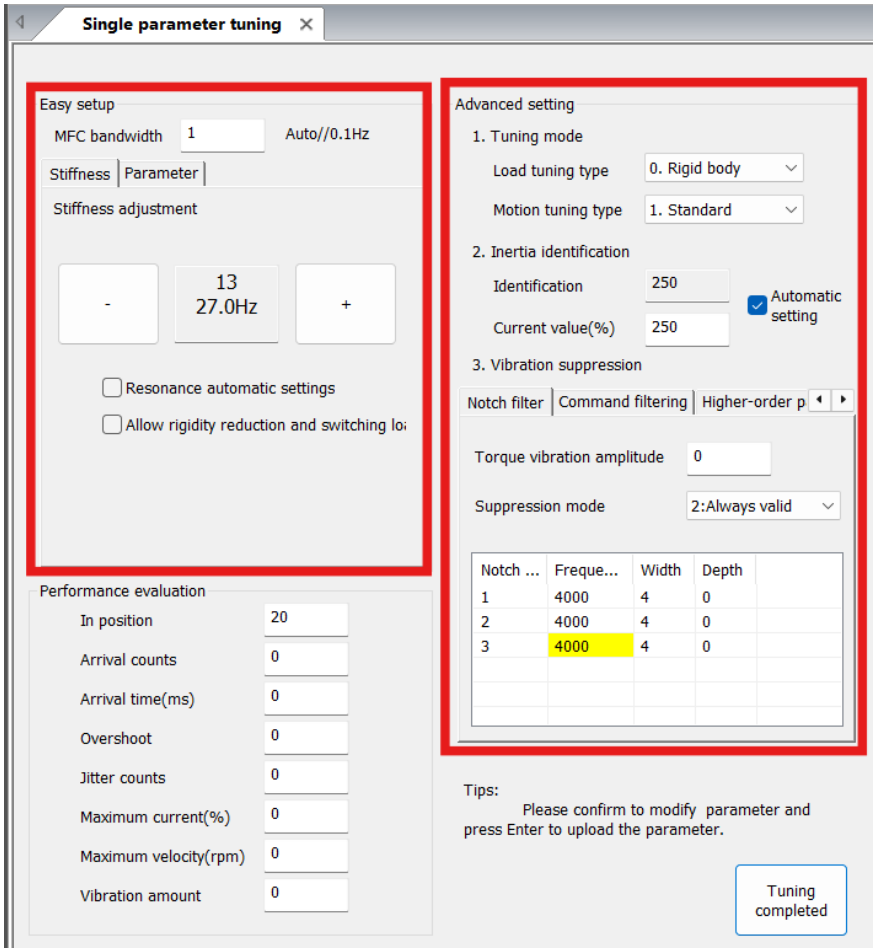

3. Manual tuning requires motor movement. Use the Trial Run function to configure motion path, speed, and acceleration.

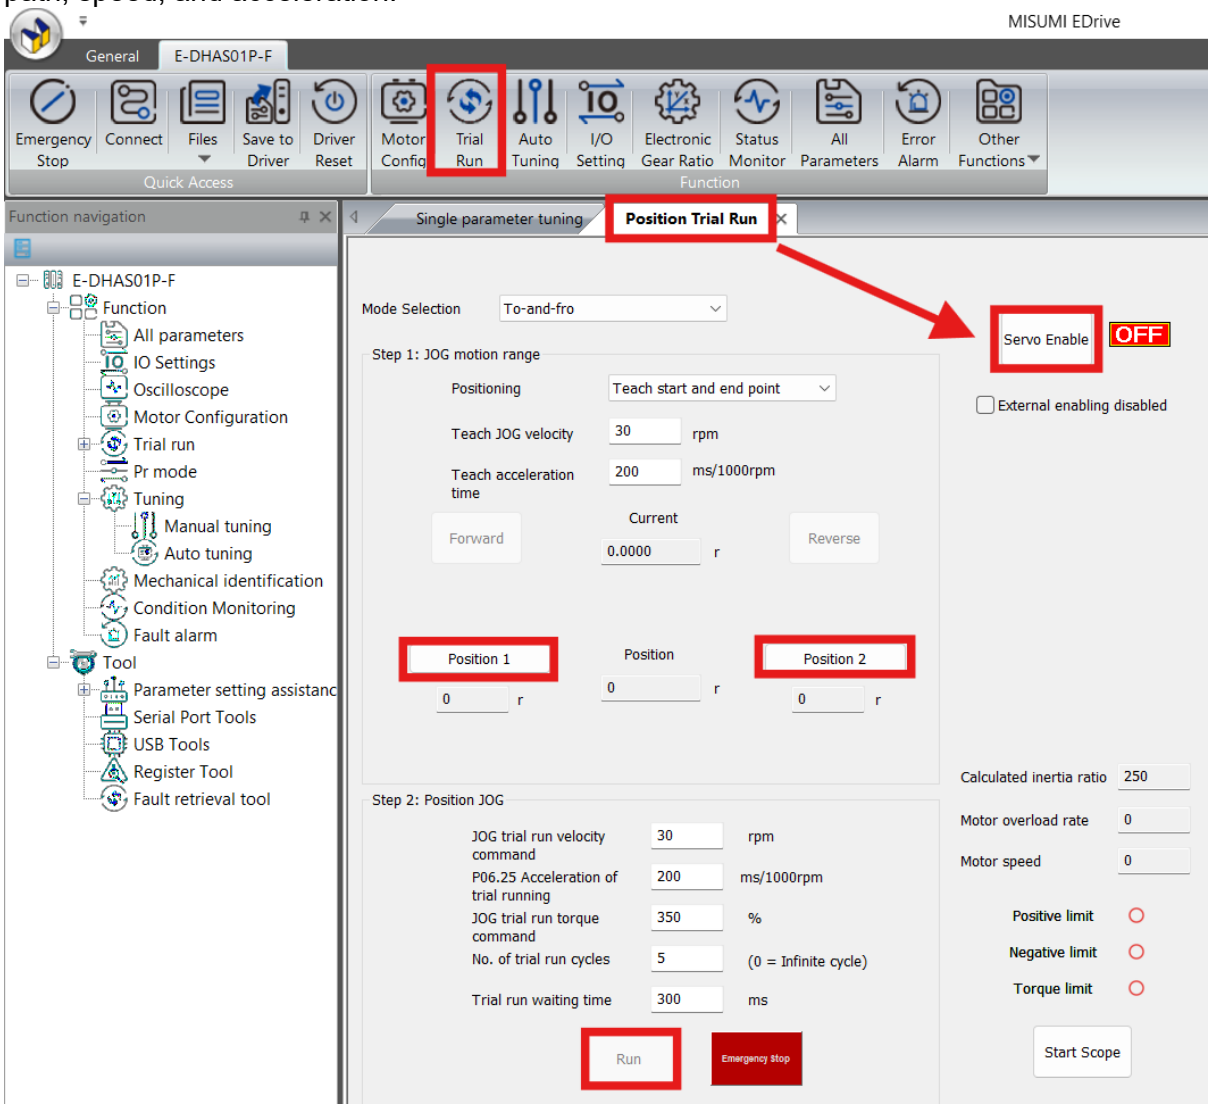


For E-DHAS□□P, there are three methods to teach the motion range:

1) Teach Start and End Point: After enabling the servo, use forward/reverse buttons to adjust position. Click “Position 1/2” to complete setup.
2) Input Start and End Point: Directly input positions in the fields. The motor will move to the start point and then perform reciprocating motion.
3) Input distance: Input the travel distance in the position difference field. The motor will perform reciprocating motion from the current position.

Note: Teaching speed should not be too fast to avoid collisions!
After setting the motion range, configure JOG motion properties:
Jog trial run velocity command: >300 rpm during manual tuning.
Acceleration of trial running: <600 ms/1000rpm during manual tuning.
No. of trial run cycles: Set an appropriate number of runs to assist manual tuning.

4. Automatic parameter setting.
Manual Tuning includes Easy Setup and Advanced Setting:
1) Easy Setup: Adjust rigidity simply to achieve auto-tuning. Inertia identification is enabled by default and will auto-set the inertia ratio.

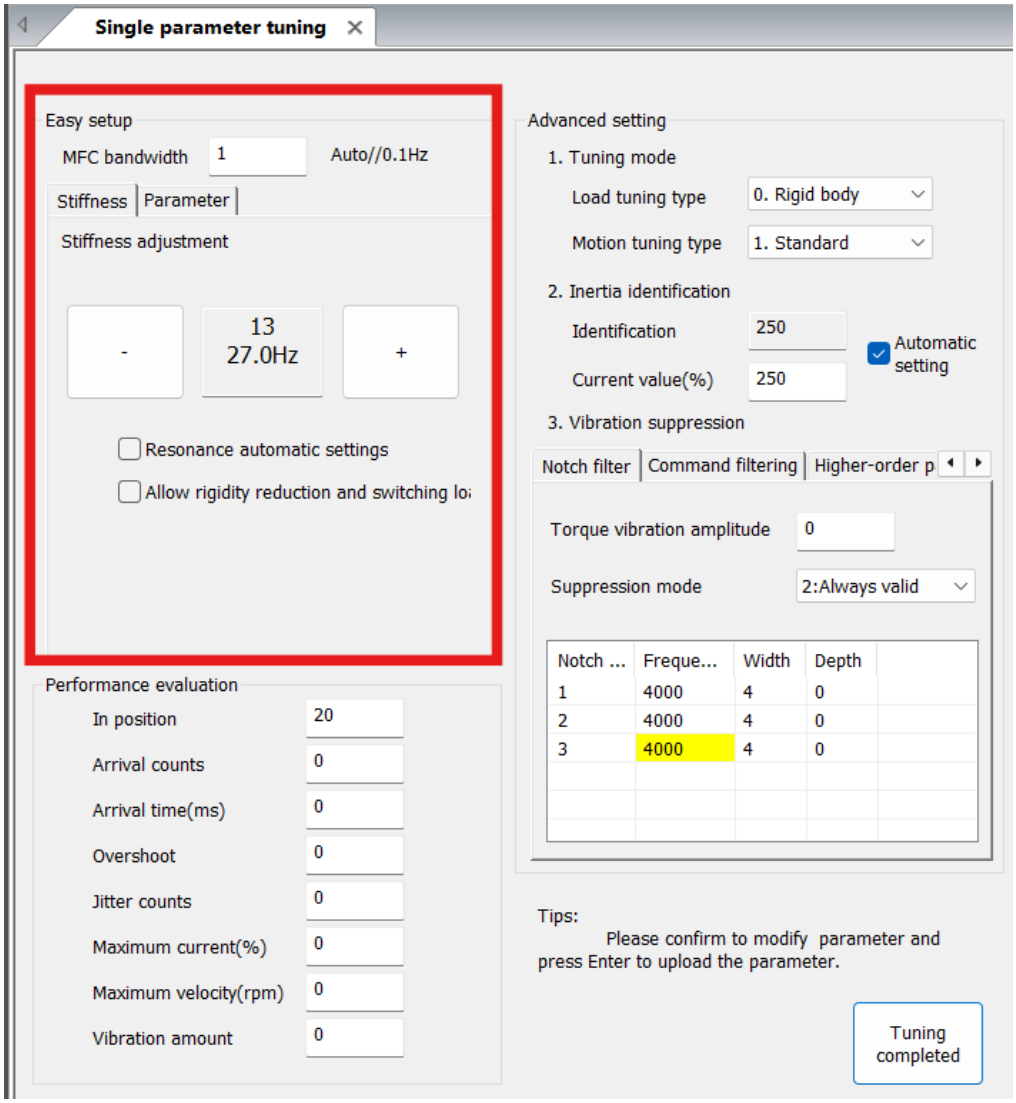


Easy Setup content:
MFC Bandwidth: Sets the model following bandwidth. MFC, also known as model following control, is used in position loop control to improve command response, accelerate positioning time, and reduce tracking error.

MFC Function	Description
0	Disable MFC
1	Auto-adjust MFC bandwidth
2 ~ 9	Invalid
10 ~ 2000	Manual setting (recommended 30–100 for belt applications)

Stiffness Adjustment:
Range: 0–31. Press '+' to increase stiffness, press '-' to decrease stiffness.
Higher values increase speed response but may cause vibration.
Set based on mechanical structure strength. If vibration count exceeds 10, reduce rigidity by 2 levels to prevent loosening of fasteners.
For belts or long rods prone to deformation, reduce rigidity and apply vibration suppression.

Resonance Automatic Settings:
If checked: cyclic vibration detection under current rigidity; resets to default if no vibration is detected.

2) Advanced Setting

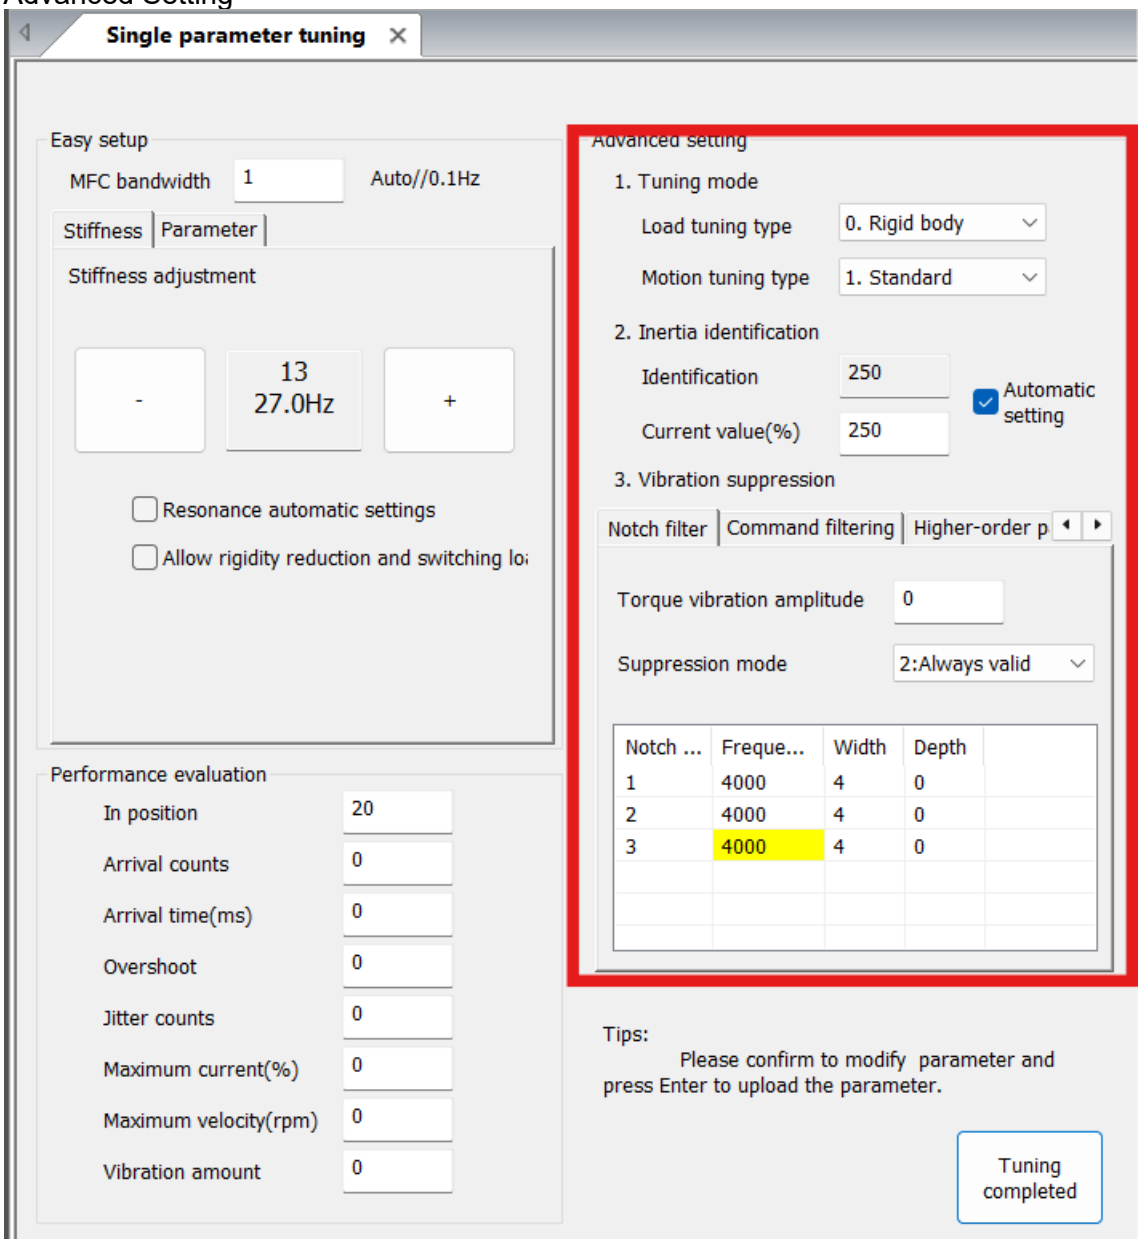

<1> Tuning mode


Load Tuning Type: The default is Rigid body, Standard. If vibration occurs during operation, it will automatically change to adapt to different transmission methods.

0: Rigid body (e.g., ball screw)


1: High inertia (load inertia >30–40× motor inertia)

2: Flexible body (e.g., belt drive)


Set the correct load setting type according to the actual situation and then perform debugging and setting for better results!

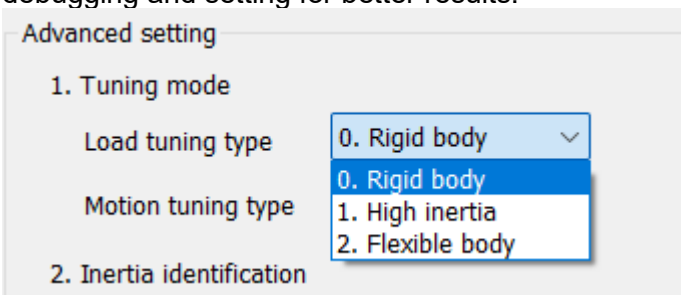


Motion Tuning Type:
0: Manual (disables real-time auto adjustment)
1: Standard (stable mode, no gain switching)
2: Location (for variable loads, e.g., horizontal axis)
The main difference between standard and positioning is that there is no gain switching in standard mode.

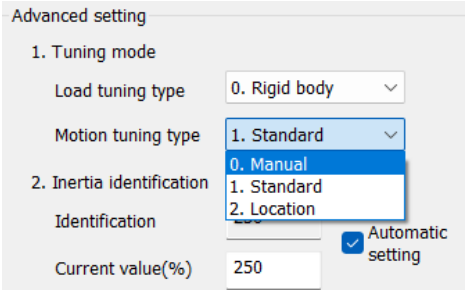

<2> Inertia identification:
Enabled by default.
Identified %: flashes yellow when successful
Current Value %: syncs with identified value if auto-set is checked; otherwise, manual input is allowed
If 'Automatic setting' is unchecked, the identification value will not be synchronized. You can manually set the current inertia ratio and press Enter to submit.
When 'Automatic setting' is checked, P00.04 is filled in based on the actual inertia identification value.
Unchecking 'Automatic setting' allows you to manually enter the inertia ratio based on the current value and press Enter to submit.




<3> Vibration suppression:
Notch Filter:
Torque Vibration Amplitude, 0 = sensitive, 100% = no detection. Adjust the value based on on-site judgment to determine whether it is vibration.
Suppression Mode, range from 0 to 2:
0: Close
1: Valid once
2: Always valid

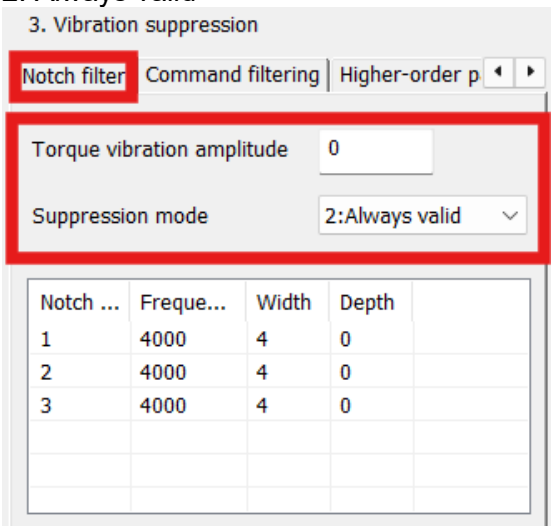

- Notch Filters: 1st, 2nd, 3rd
- Frequency: 50–2000
- Width: 0–20
- Depth: 0–99


Frequency changes flash yellow.

Command Filtering (manual input only):

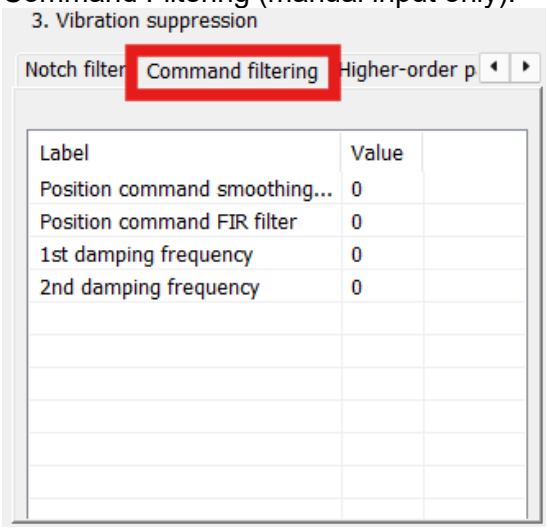


Position Command Smoothing Filter: 0–32767 (unit: 0.1 ms). Setting this parameter too high may prolong the setting time.
Position Command FIR Filter: 0–10000 (unit: 0.1 ms). Setting this parameter too high may prolong the setting time.
1st Damping Frequency: 10–2000 (unit: 0.1 Hz). Set the damping frequency to suppress end vibration.
2nd Damping Frequency: 10–2000 (unit: 0.1 Hz). Set the damping frequency to suppress end vibration.


High-Order Parameter:

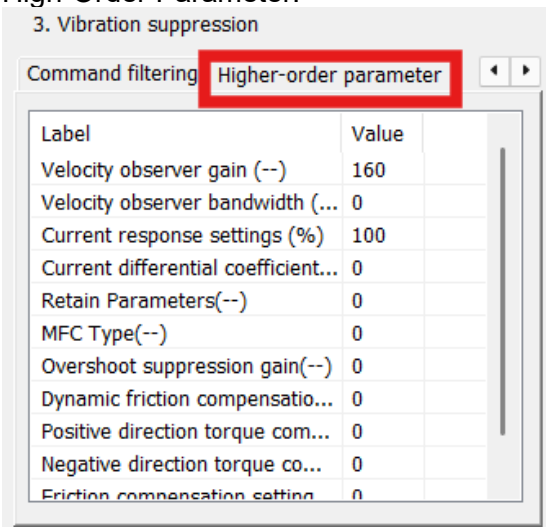

Velocity Observer Gain: The default stable gain, set to 1 to disable the observer.
Velocity Observer Bandwidth: The default is stable filtering, set to 1 to turns off the observer.
Current Response Settings: Ratio of effective values of driver current loop related parameters, range 50~100, unit %


5. Performance Evaluation
Check overshoot and jitter count:

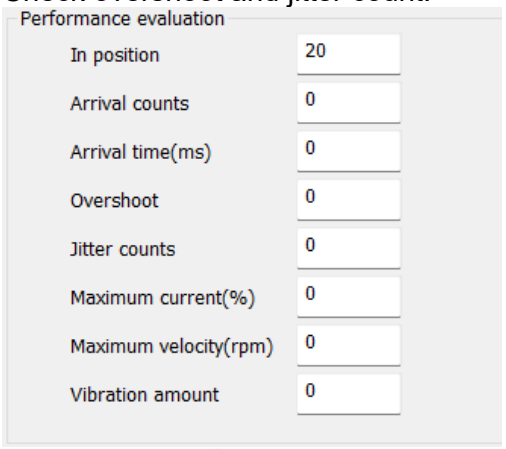

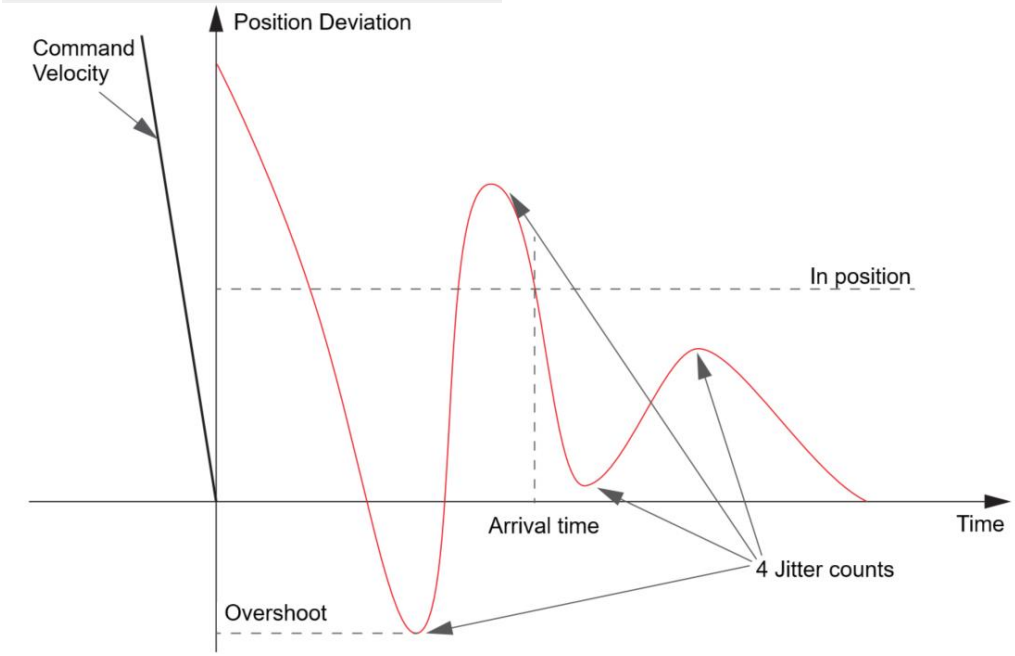


In position: allowable deviation between target and actual speed.
Aval counts: number of times target is reached.
Overshoot: overshoot between the target value and the actual measured value. <10% is displayed in white, 10% ~ 100% is displayed in yellow, >100% is displayed in red.
Jitter counts: the number of vibrations detected. If the number of vibrations = 1, the color turns yellow; if the number of vibrations > 1, the color turns red. The default color is white.
Maximum current: percentage of maximum current.
Increase stiffness and gain, use simple or advanced settings, and observe waveform to achieve optimal results.


Stiffness = 11:

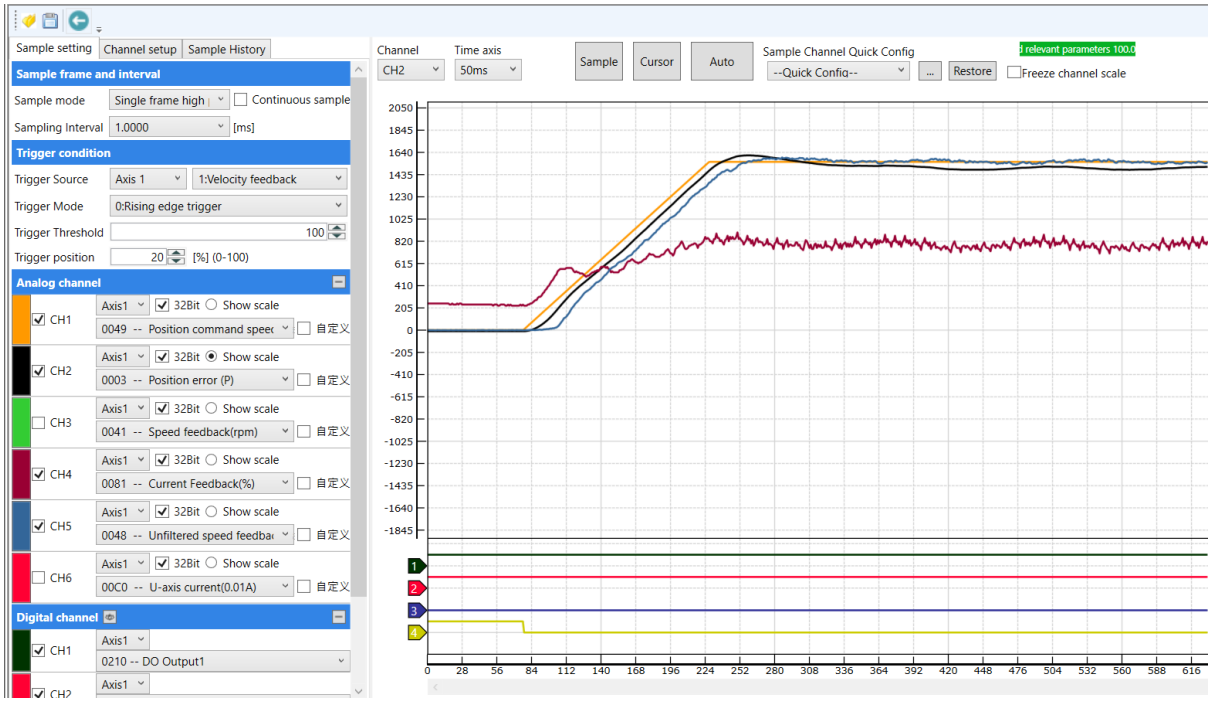

Stiffness = 20:

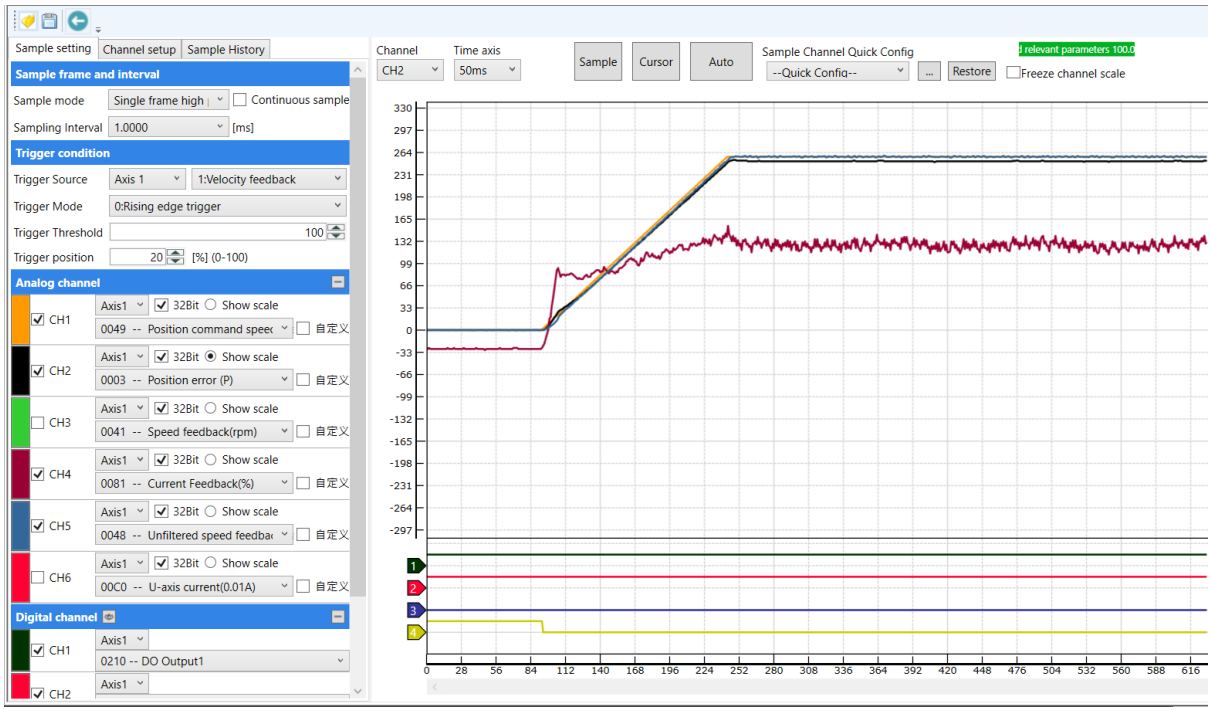

6. After Tuning Completion

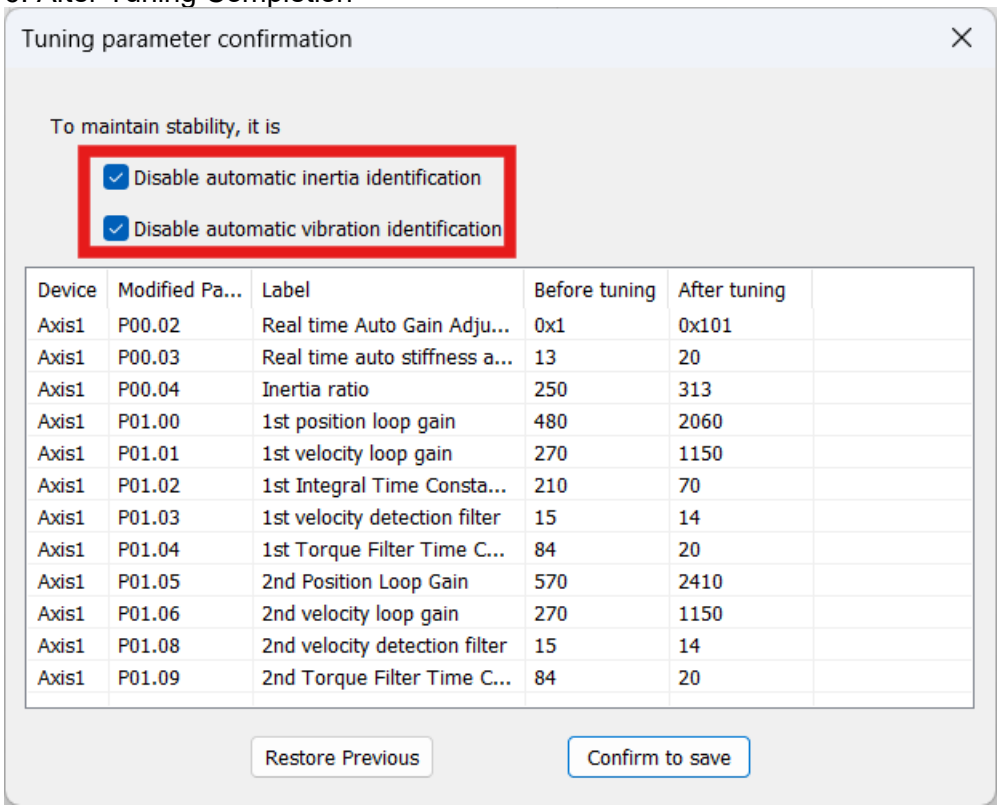

Device	Modified Pa...	Label	Before tuning	After tuning
Axis1	P00.02	Real time Auto Gain Adju...	0x1	0x101
Axis1	P00.03	Real time auto stiffness a...	13	20
Axis1	P00.04	Inertia ratio	250	313
Axis1	P01.00	1st position loop gain	480	2060
Axis1	P01.01	1st velocity loop gain	270	1150
Axis1	P01.02	1st Integral Time Consta...	210	70
Axis1	P01.03	1st velocity detection filter	15	14
Axis1	P01.04	1st Torque Filter Time C...	84	20
Axis1	P01.05	2nd Position Loop Gain	570	2410
Axis1	P01.06	2nd velocity loop gain	270	1150
Axis1	P01.08	2nd velocity detection filter	15	14
Axis1	P01.09	2nd Torque Filter Time C...	84	20

Disable automatic inertia identification: After automatic parameter tuning, turn off automatic inertia identification.
Disable automatic vibration identification: After automatic parameter tuning, turn off automatic vibration identification.
Restore Previous: Do not save the parameters after automatic tuning
Confirm to save: Save the parameters after automatic tuning

8.4 Auto Gain Adjustment

This function will measure real time mechanical properties and set gain values in accordance with mechanical stiffness.

Scope of application

Auto gain adjustment can be used in any control mode

Conditions to implement	
Control mode	Please refer to P00.02 for detailed explanations. Auto gain adjustment is different for each control mode.
Other	• Servo driver needs to be enabled • Set up input signals such as deviation counter clearing and command input; Torque limit and other motion control parameters to enable motor to move normally without obstacles.

Precautions

Under certain conditions, external factors might affect automatic gain adjustment functions. If the conditions as listed exist or unfavorable, please disable the automatic gain adjustment function.

Affecting conditions	
Load inertia	• If inertia is less than 3 times or over 30 times of rotor inertia. • Changes in load inertia
Load	• Very low mechanical stiffness • If gear backlash is a non-linear property
Motion	• Velocity less than 100r/min or continuously in low velocity mode • Acc-/deceleration to 2000r/min within 1s. • Acc-/deceleration torque lower than eccentric load, frictional torque. • Velocity < 100r/min, acc-/deceleration to 2000r/min within 1s but not longer than 50ms

Operating method

To enable automatic gain adjustment:

1) Disable the servo driver.
2) Set P00.02 = 0x01/0x11 or 0x02/0x12. Then, set P00.03
3) Servo enabled. Run motion as normal to start measuring load properties. Related parameters will be automatically set.
4) Increase motor responsiveness by increasing P00.03. Please check if there is any vibration before setting P00.03 to max. value.
5) Save the parameters.

Please take note:

- Please stop the motor before modifying any parameter. P00.02 only takes effect after saving modified parameter values into EEPROM and restarting the driver.
- After enabling the servo driver for the first time or when increasing P00.03, mechanical noise or vibration might occur for the first run, it is normal. If it persists, please set P00.03 to lower value.

Parameters that change in accordance with real time gain adjustment

There are 2 types of auto gain adjustment methods:
Standard mode (P00.02 = 0x__1): Basic mode, prioritizing on stability, gain switching is disabled. Actual gain auto adjustment as accordance to P00.03.
Gain related parameters that change as shown below.

Parameter	Label	Remarks
P01.00	1st position loop gain	When stiffness setting is valid, parameters will be updated to match stiffness value
P01.01	1st velocity loop gain	
P01.02	1st velocity integral time constant	
P01.03	1st velocity detection filter	
P01.04	1st torque filter	

Gain related that doesn't change

Parameter	Label	Reference value	Remarks
P01.10	Velocity feedforward gain constant	300（0.1%）	Doesn't change according to changes in stiffness

Positioning mode (P00.02=0x2): Prioritizing positioning. Usually applies on horizontal axis without variable load, ball screws with lower friction, gain switching enabled. Stiffness level of 2nd position loop gain is 1 level higher than 1st position.

Parameters	Label	Remarks
P01.00	1st position loop gain	When stiffness setting is valid, parameters will be updated to match stiffness value
P01.01	1st velocity loop gain	
P01.02	1st velocity integral time constant	
P01.03	1st velocity detection filter	
P01.04	1st torque filter	
P01.05	2nd position loop gain	
P01.06	2nd velocity loop gain	
P01.08	2nd velocity detection filter	
P01.09	2nd torque filter	

If auto gain adjustment is valid, the parameters listed above can't be manually modified. Only when P00.02 = 0x00 or 0x10, can the gain related parameters be modified manually.

Gain related parameters that don't change with the real time gain adjustment

Parameter	Label	Reference value
P01.07	2nd velocity integral time constant	1000ms
P01.10	Velocity feedforward gain constant	30%
P01.11	Velocity feedforward filter time constant	0.50ms
P01.12	Torque feedforward gain	0
P01.13	Torque feedforward filter time constant	0
P01.15	Position control gain switching mode	10
P01.17	Position control switching level	50
P01.18	Position control switching hysteresis	3 3
P01.19	Position gain switching time	33 ms

Types of mechanical load

Please select mechanical load according to load-inertia ratio and mechanical structures:

Load types	Description
0x00_ : Rigid structure	When load is **rigid** with relatively **low inertia**. Gain adjustments prioritize **system responsiveness**. Structures including high precision reducer, lead screws, mechanical gears, etc.
0x01_ : High inertia	**High load inertia** (10 times or above). Gain adjustments prioritize **operation stability and responsiveness**. Recommended mechanical stiffness level **not more than 15**.
0x02_ : Flexible structure	When load is **flexible** with relatively **high inertia**. Gain adjustments prioritize **operation stability**. Structures including long transportation belt or chain.

Structures with high inertia can have better performance if inertia ratio is set accurately.

P00.02	Label	Real time Auto Gain Adjusting			Valid mode(s)	P	S	T
	Range	0x0~0xFF	Unit	—	Default	0x1		
	Byte length	16bit	Attribute	R/W	485 address	0x0005		
	Valid	Immediate						

Data bits	Category	Settings	Application
0x00_	Motion setting mode	Used to set motion setting mode, which can be selected according to the motion characteristics or setting requirements. Generally, it is recommended to select mode 1 with good generality when there is no special requirement, mode 2 when rapid positioning is needed If mode 1 and mode 2 cannot meet the requirements, please choose mode 0.	
		0: Manual	P00.03 invalid. Gain value must be adjusted manually and accordingly.
		1: Standard	P00.03 valid. Quick gain adjusting can be achieved by changing P00.03 stiffness value. Gain switching is not used in this mode, suitable for applications with requirements for stability.
		2: Positioning	P00.03 valid. Quick gain adjusting can be achieved by changing P00.03 stiffness value. This mode is suitable for applications requiring quick positioning. Not recommended for load mounted vertically to ground, or please compensate for the load using P06.07
0x0_0	Load type setting	Used to select the load type, choose according to load-inertia ratio and mechanical structure.	
		0: Rigid structure	This mode prioritizes system responsiveness. Use this mode when there is a relatively rigid structure with low load inertia. Typical application including directly connected high-precision gearbox, lead screw, gears, etc.
		1: High inertia	For applications with higher load inertia (10 times or above), gain settings take into account both machine stability and responsiveness. Not recommended to set stiffness above 15 for high load inertia.
		2: Flexible structure	This mode prioritizes system stability. Use this mode when there is low rigidity structure with high load inertia. Typical applications included belts and chains.
0x_00	reserved		

The setting type combination is a hexadecimal standard, as follows:

Setting type combination	Application type
0X000	Rigid structure + Manual
0X001	Rigid structure +Standard
0X002	Rigid structure +Positioning
0X010	High inertia + Manual
0X011	High inertia + Standard
0X012	High inertia + Positioning


0X020	Flexible structure + Manual
0X021	Flexible structure +Standard
0X022	Flexible structure +Positioning

Gain parameters settings table

Stiffness	1st gain				2nd gain			
	P01.00	P01.01	P01.02	P01.04	P01.05	P01.06	P01.07	P01.09
	Position loop gain (0.1/s)	Velocity loop gain (Hz)	Velocity loop integral time constant （0.1ms）	Torque filter (0.01ms)	Position loop gain (0.1/s)	Velocity loop gain (Hz)	Velocity loop integral time constant （0.1ms）	Torque filter (0.01ms)
0	20	15	3700	1500	25	15	10000	1500
1	25	20	2800	1100	30	20	10000	1100
2	30	25	2200	900	40	25	10000	900
3	40	30	1900	800	45	30	10000	800
4	45	35	1600	600	55	35	10000	600
5	55	45	1200	500	70	45	10000	500
6	75	60	900	400	95	60	10000	400
7	95	75	700	300	120	75	10000	300
8	115	90	600	300	140	90	10000	300
9	140	110	500	200	175	110	10000	200
10	175	140	400	200	220	140	10000	200
11	320	180	310	126	380	180	10000	126
12	390	220	250	103	460	220	10000	103
13	480	270	210	84	570	270	10000	84
14	630	350	160	65	730	350	10000	65
15	720	400	140	57	840	400	10000	57
16	900	500	120	45	1050	500	10000	45
17	1080	600	110	38	1260	600	10000	38
18	1350	750	90	30	1570	750	10000	30
19	1620	900	80	25	1880	900	10000	25
20	2060	1150	70	20	2410	1150	10000	20
21	2510	1400	60	16	2930	1400	10000	16
22	3050	1700	50	13	3560	1700	10000	13
23	3770	2100	40	11	4400	2100	10000	11
24	4490	2500	40	9	5240	2500	10000	9
25	5000	2800	35	8	5900	2800	10000	8
26	5600	3100	30	7	6500	3100	10000	7
27	6100	3400	30	7	7100	3400	10000	7
28	6600	3700	25	6	7700	3700	10000	6
29	7200	4000	25	6	8400	4000	10000	6
30	8100	4500	20	5	9400	4500	10000	5
31	9000	5000	20	5	10500	5000	10000	5


8.5 Manual Gain Adjustment

Due to limitation of load conditions, automatic gain adjustment might not achieve expected performance. Control can be improved through manual gain adjustment
The servo system is made up of 3 control loops. From outer to inner: position loop, velocity loop, current loop as shown in the diagram below.

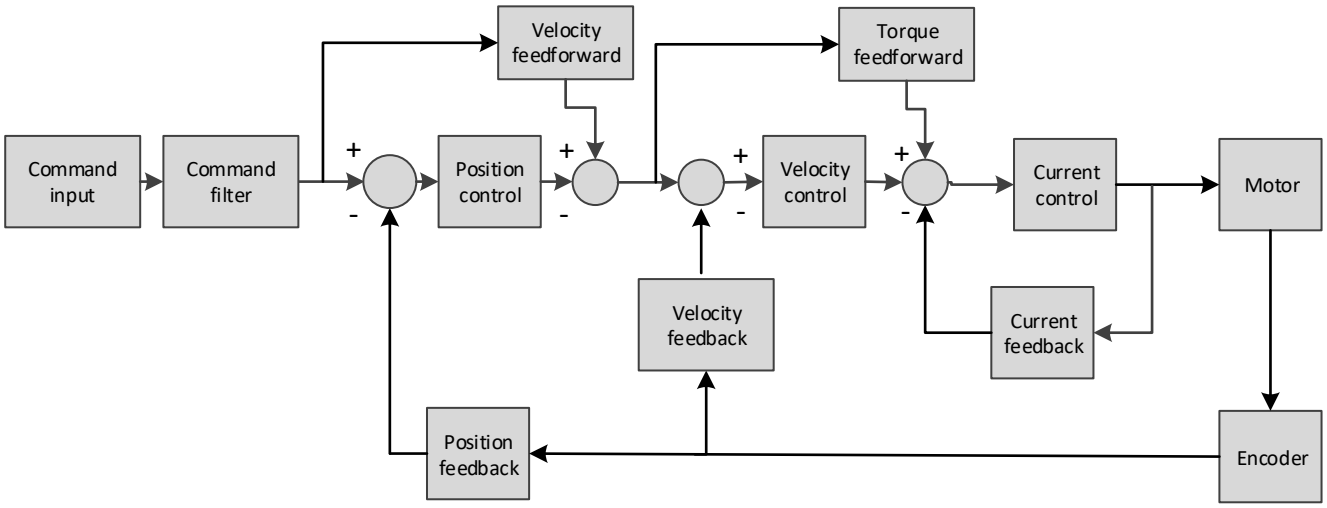

Inner control loop demands higher responsiveness. In order to avoid system instability, please tune in accordance with this principle. Current loop gain usually satisfies the responsiveness demand without tuning. When gain adjustment is done under position control mode, in order to keep the system stabile, position and velocity loop gain have to be increased at the same time to make sure the responsiveness of the position loop is lower than velocity loop.

Steps to tuning (Position and velocity control)

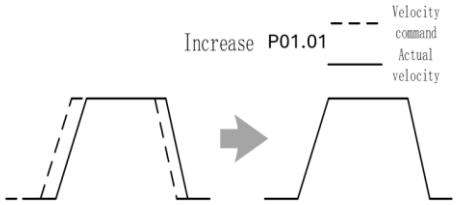Step	Parameter	Label	Tuning method
1	P01.01	Velocity loop gain	Determine if velocity loop is able to follow the changes in velocity command at highest frequency. If P00.04 is set correctly, velocity loop highest following frequency = P01.01  Increase P01.01 provided there is no noise or vibration to reduce positioning time, better velocity stability and following. Reduce P01.01 if there is mechanical noise. Set up vibration suppression if there is mechanical vibration.

Step	Parameter	Label	Tuning method
2	P01.02	Velocity loop integral time constant	To eliminate velocity loop deviation  Velocity loop integral time constant (ms) = 4000 /（2*π*Velocity loop gain(Hz)） Reduce P01.02 to reduce positioning time. Mechanical vibration might occur if set value is too low; Velocity loop deviation can't be zeroed if set value is too high. Reduce P01.02 to increase systemic stiffness, reduce deviation, provided that there is no resonance or noise in the system. If load-inertia ratio is high or resonance exists in mechanical system, increase P01.02.
3	P01.00	Position loop gain	Determine if position loop is able to follow the changes in position command at highest frequency. Position loop highest following frequency = P01.00  Increase P01.00 to reduce position following deviation, reduce positioning time provided that there is no resonance or noise in the system. If P01.00 is set too high, it might cause trembling in the mechanical system or positioning overshoot
4	P01.04	1st torque filter time constant	Eliminate high frequency noise, suppress mechanical resonance.  System response improves with lower set value but there is mechanical limitations; High frequency resonance suppression improves with higher set value, but it might cause reduction in response bandwidth and phase margin, resulting in system turbulence. Torque filtering frequency is 4 times higher than velocity loop max following frequency: 1000000/(2π×P01.04) ≥ P01.01×4 For example, when P01.01=180（0.1 Hz）, P01.04 should satisfy： P01.01≤221（0.01ms）

1. If vibration occurs with increasing P01.01, please modify P01.04 to suppress vibration.
2. If the parameters are set too high, it might cause current loop response to reduce.
3. To suppress vibration at stop, increase P01.01 and decrease P01.04.
4. Decrease P01.04 if motor vibrates too much at rest.
5. P01.04 cannot be set to overly high value as it might cause control system instability because the torque loop response is much higher than velocity loop.

For servo gain, if any one of the parameters is changed, please modify other gain related parameters accordingly. Make sure to change at around 5% and follow the rules as below.

1. Increase responsiveness
   1) Reduce torque command filter time
   2) Increase velocity loop gain
   3) Decrease velocity loop integral time
   4) Increase position loop gain
2. Decrease responsiveness, prevent vibration and overshoot
   1) Reduce position loop gain
   2) Increase velocity loop integral time
   3) Reduce velocity loop gain
   4) Increase torque filter time

8.5.1 Parameters Adjustment Under Different Control Modes

Under different control modes, parameters adjustment must be adjusted in this order: "Inertia measuring" -> "Auto gain adjustment"-> "Manual gain adjustments"

Position control mode

Set load-inertia ratio P00.04 after inertia determination.

No.	Parameter	Label
1	P01.00	1st position loop gain
2	P01.01	1st velocity loop gain
3	P01.02	1st velocity integral time constant
4	P01.03	1st velocity detection filter
5	P01.04	1st torque filter time constant
6	P01.05	2nd position loop gain
7	P01.06	2nd velocity loop gain
8	P01.07	2nd velocity integral time constant
9	P01.08	2nd velocity detection filter
10	P01.09	2nd torque filter time constant
11	P01.10	Velocity feedforward gain constant
12	P01.11	Velocity feedforward filter time constant
13	P01.12	Torque feedforward gain
14	P01.13	Torque feedforward filter time constant
15	P01.15	Position control gain switching mode
16	P01.17	Position control switching level
17	P01.18	Position control switching hysteresis
18	P01.19	Position gain switching time

1st and 2nd gain initial values are obtained by automatic gain adjustment

No.	Parameter	Label
1	P01.00	1st position loop gain
2	P01.01	1st velocity loop gain
3	P01.02	1st velocity integral time constant
4	P01.03	1st velocity detection filter
5	P01.04	1st torque filter time constant
6	P01.05	2nd position loop gain
7	P01.06	2nd velocity loop gain
8	P01.07	2nd velocity integral time constant
9	P01.08	2nd velocity detection filter
10	P01.09	2nd torque filter time constant

Manually adjusted gain parameters

No.	Parameter	Label
1	P01.00	1st position loop gain
2	P01.01	1st velocity loop gain
3	P01.02	1st velocity integral time constant
4	P01.04	1st torque filter time constant
5	P01.10	Velocity feedforward gain constant
6	P01.11	Velocity feedforward filter time constant

Velocity control mode

Velocity control mode parameters adjustment is pretty similar to position control mode. Except for position loop gain P01.00 and P01.05, velocity feedforward gain (P01.10)

Torque control mode

Parameters adjustment for torque control mode has to be differentiated into 2 conditions:

1. When actual velocity reaches velocity limit, adjustment will be as per velocity control mode. Motor will switch from torque control to velocity limit as velocity control.
2. When actual velocity doesn't reach velocity limit yet, Except for position loop gain, velocity loop gain and feedforward gain, parameter adjustments as per velocity control mode.


If there is no velocity limit and control is through torque command, please deactivate torque and notch filter, set velocity limit to max. value and increase velocity loop gain to as high as possible.

8.5.2 Gain Switching


Gain switching function can be triggered internally in servo driver. Only valid under position or velocity control mode. Following effects can be realized by gain switching:

1. Switch to lower gain when motor stops to suppress vibration
2. Switch to higher gain when motor is moving at a low velocity to shorten positioning time
3. Switch to higher gain when motor is moving at a high velocity to improve command following behavior.

Diagram below shows gain switching when motor stops.

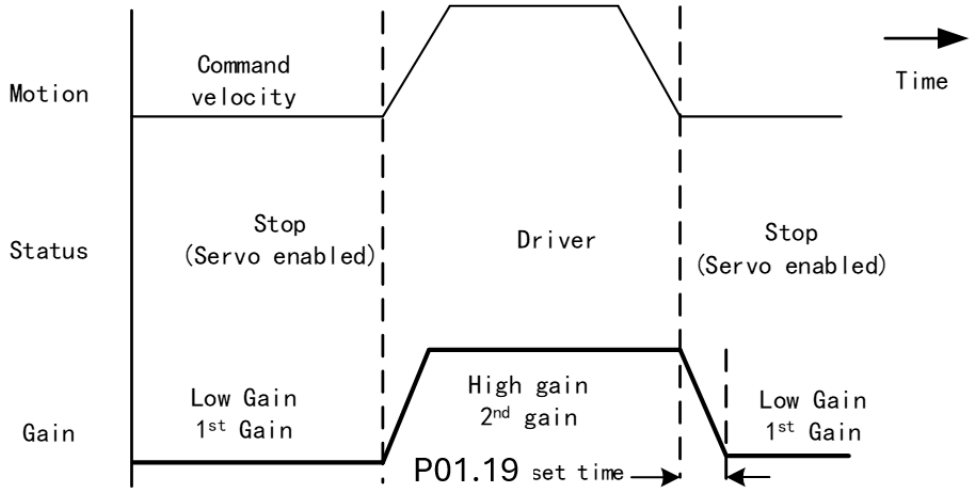

1st gain (P01.00-P01.04) and 2nd gain (P01.05-P01.09) switching can be realized through manual and positioning mode. Switching condition is set through P01.15. Gain switching is invalid under standard mode.


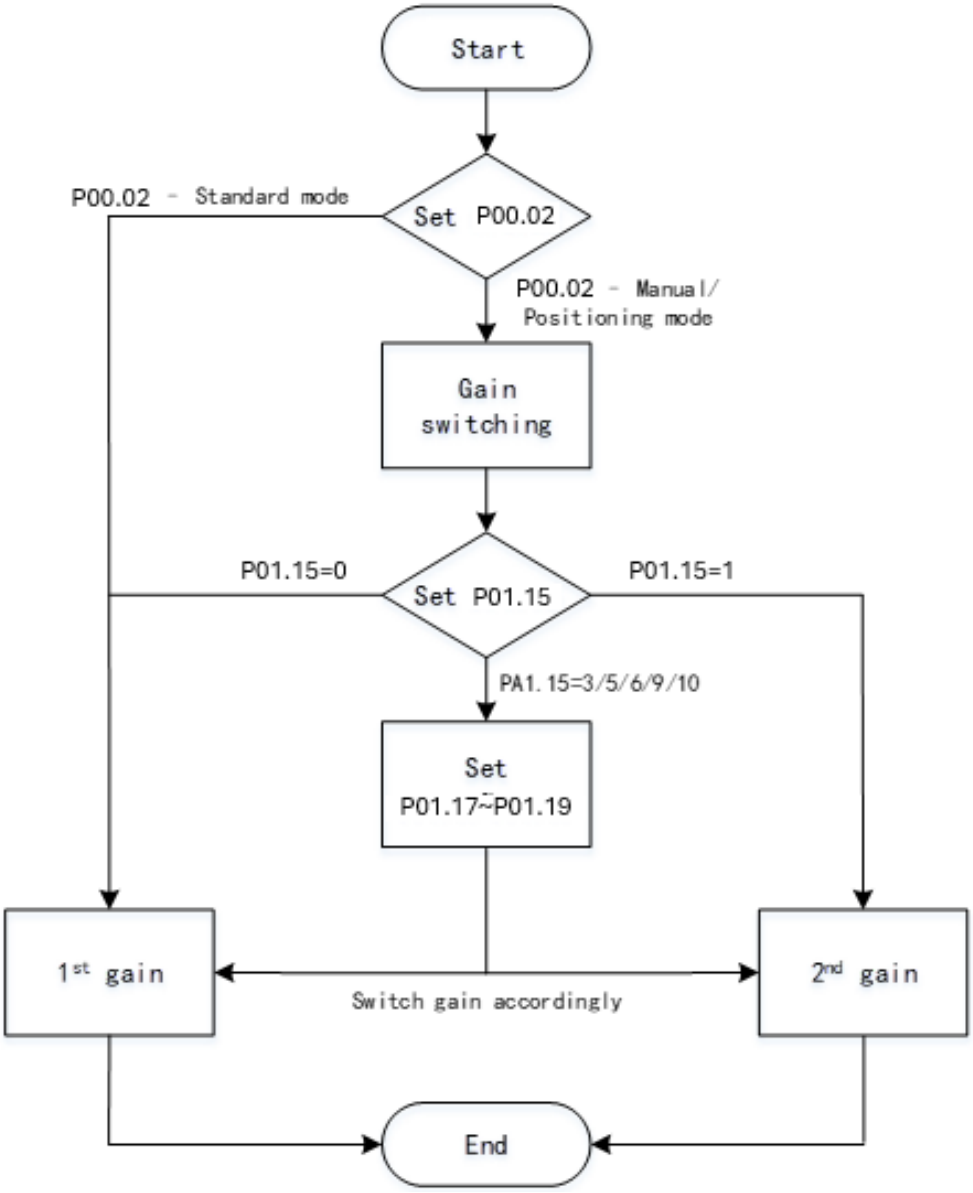


Related parameters on gain switching

No.	Parameter	Label	Remarks
1	P01.15	Position control gain switching mode	In position control, set P01.15=3、5、6、9、10. In velocity control, set P01.15=3、5、9
2	P01.17	Position control level switching	Please set P01.17≥P01.18
3	P01.18	Position control hysteresis switching	If P01.17＜P01.18, driver will set P01.17＝P01.18
4	P01.19	Position gain time switching	

P01.15	Label	Position control gain switching mode			Valid mode(s)	P		
	Range	0～10	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x011F		
	Valid	Immediate						

In position control, set the conditions for gain switching to be valid.

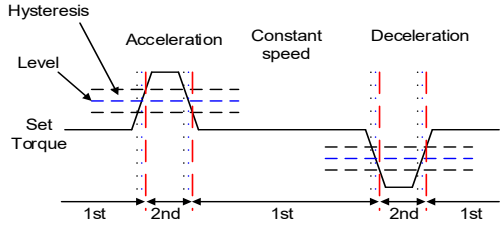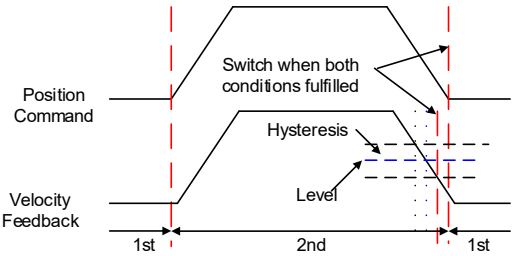Value	Condition	Gain switching condition
【0】	1st gain fixed	Fixed on using 1st gain(P01.00-P01.04)
1	2nd gain fixed	Fixed on using 2nd gain (P01.05-P01.09)
2	Gain switching input valid	· Gain switching input （GAIN）invalid: 1st gain. · Gain switching input （GAIN）valid: 2nd gain. **Default: 1st gain*
3	High command torque	Switch to 2nd gain when set torque command absolute value larger than (level + hysteresis) [%] Switch to 1st gain when set torque command absolute value smaller than (level + hysteresis) [%] 
4-9	Reserved	Reserved
10	Pending position command +actual velocity	Valid for position control. Switch to 2nd gain if position command ≠ 0 Switch to 1st gain if positional command = 0 throughout the duration of delay time and absolute value of actual velocity remains smaller than (level - hysteresis) (r/min) 

*** Above 'level' and 'hysteresis' are in correspondence to P01.17 Position control gain switching level and P01.18 Hysteresis at position control switching.*

P01.17	Label	Position control gain switching level			Valid mode(s)	P		
	Range	0~20000	Unit	Mode dependent	Default	50		
	Byte length	16bit	Attribute	R/W	485 address	0x0123		
	Valid	Immediate						

Set threshold value for gain switching to occur.
Unit is mode dependent.

Switching condition	Unit
Position	Encoder pulse count
Velocity	RPM
Torque	%


Please set level ≥ hysteresis

P01.18	Label	Hysteresis at position control switching			Valid mode(s)	P		
	Range	0~20000	Unit	Mode dependent	Default	33		
	Byte length	16bit	Attribute	R/W	485 address	0x0125		
	Valid	Immediate						

To eliminate the instability of gain switching. Used in combination with P01.17 using the same unit.
If level< hysteresis, drive will set internally hysteresis = level.


P01.19	Label	Position control switching time			Valid mode(s)	P		
	Range	0~10000	Unit	0.1ms	Default	33		
	Byte length	16bit	Attribute	R/W	485 address	0x0127		
	Valid	Immediate						

During position control, if 1st and 2nd gain difference is too large, to ease torque changes and vibration due to rapid changes in position loop gain, set suitable P01.19 value
For example: 1st (P01.00) <-> 2nd (P01.05)

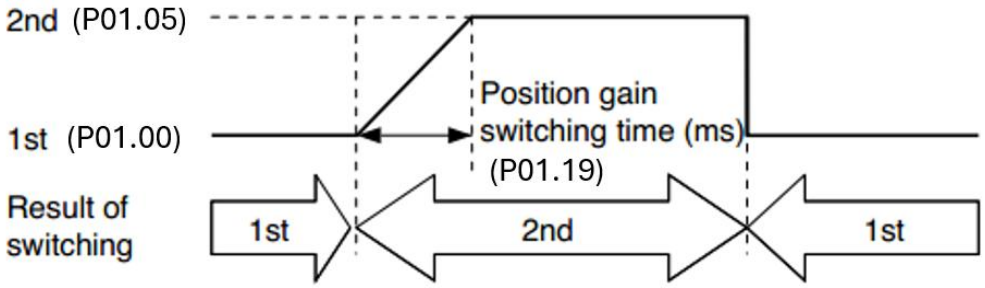

8.5.3 Model Following Control (MFC)

Model following control is a type of closed loop control system. First, an ideal model is constructed and acts as a reference for actual model in a closed loop control. Model following control can be treated as a control mode with 2 flexibilities: Model reference can be used to improve command responsiveness and closed loop control used to increase responsiveness of the system towards interference. They don't affect each other.
Model following control can be used in position loop control to increase responsiveness to commands, reduce positioning time and following error. This function is only available in position control mode.

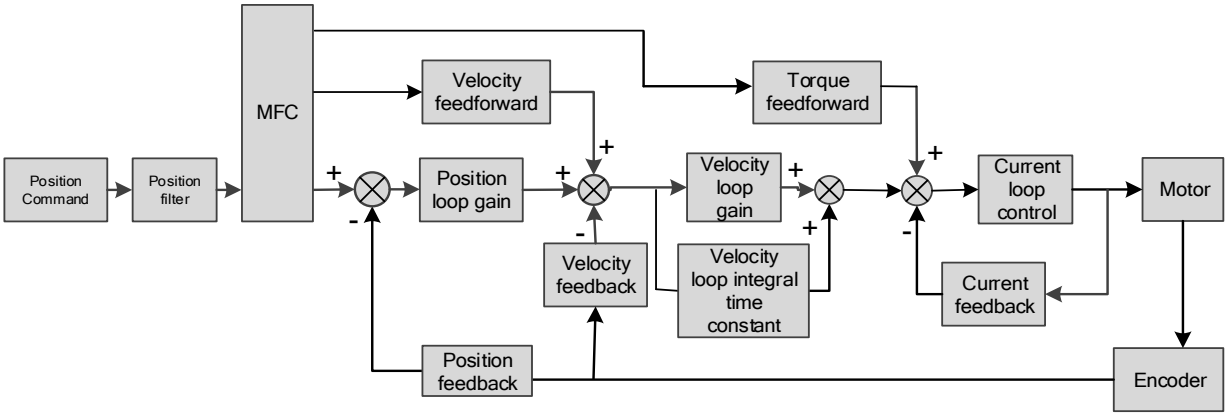

To adjust model following control

Automatic adjustment

- Set model following bandwidth P00.00 = 1 for automatic adjustment. Now, P00.00 = P01.01, model following bandwidth is adjusted automatically according to different velocity loop gain.

2. Manual adjustment

Please use manual adjustment if

- Automatic adjustment is not satisfactory.
- Responsiveness needs further improvement in comparison with automatic adjustment.
- There is a need to set servo gain or model following control parameters manually.

Steps to manually adjust


Step	Content
1	Set up vibration suppression.
2	Set up the right inertia ratio.
3	Manually adjust gain.
4	Increase P00.00 provided that there is no overshoot and vibration. Usually, P00.00 ≥ P01.01 is recommended.

Model following bandwidth determines the responsiveness of the servo system. Increase the value set will increase responsiveness and reduce positioning time. Overshoot can be prevented if it is set at a lower value, but responsiveness will be lowered. Model following bandwidth shouldn't be too large for mechanical structure with lower stiffness, excessive position deviation alarm might occur under high velocity.

8.5.4 Zero Tracking Control

Zero tracking control (ZTC) is able to realize a zero-position deviation during acceleration/deceleration. This function increase multi axis precision and master-slave following.
Recommended application:

1. Multi axis

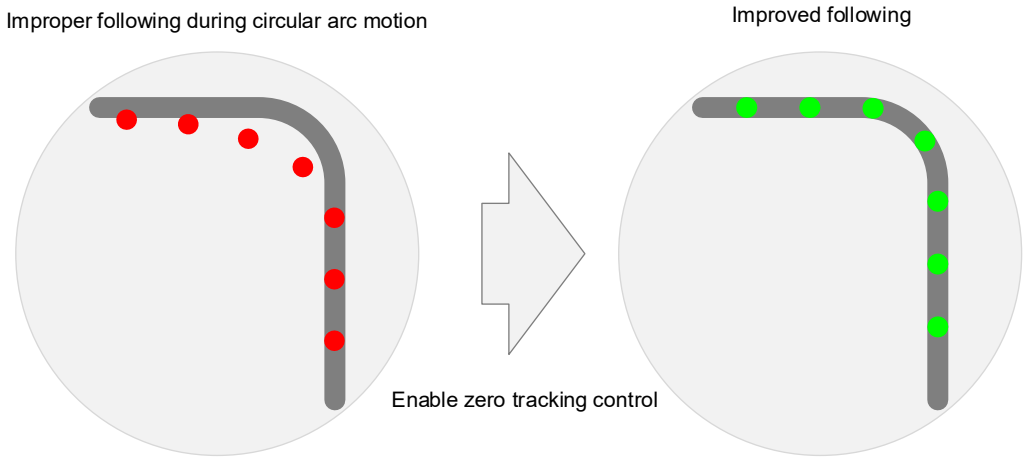

2. Master-slave following
   Used when driving axis sends frequency divider signal to lead following axis to improve the following control.

- ZTC is only available under position control mode.
- ZTC can only be enabled when P00.00 is valid.
- Model following control (MFC) and Zero Tracking Control (ZTC) cannot be used together at the same time.

Zero tracking control can achieve better performance with the following limiting factors.

	Limiting factors
Electronic gear ratio	Electronic gear ratio should be lower to prevent current noise.
Mechanical structure	Better structural rigidity to prevent vibration.
Motion	1. Command acceleration should be continuously low to prevent deviation change during drastic changes in acceleration. 2. Callback or overtravel might exist in positioning; sigmoid signal command might improve the problem.

Related parameters

Parameter	Label	Description
P02.50	Model following control	0：Model following control - Default 1：Zero tracking control
P02.53	Dynamic friction compensation coefficient	Range: 0-1000, unit: 0.1% Unit：Changes in torque with the effect of friction on rotational speed. Only valid when MFC is activated
P00.00	Model following bandwidth	If P00.00 = 0, MFC and ZTC is deactivated. When P02.50 = 1 (Zero tracking control), higher bandwidth will improve following performance, but noise will be higher.
Set the following parameters to default		
P02.51	Velocity feedforward compensation coefficient	Default value = 0 for zero tracking control.
P02.52	Torque feedforward compensation coefficient	
P02.54	Overtravel time constant	
P02.55	Overtravel suppression gain	

8.5.5 Feedforward Gain

In position control or full closed loop control, velocity feedforward is calculated by comparing the velocity control command calculated internally and velocity command calculated from position feedback. Comparing to control only using feedback, this will reduce position deviation and increase responsiveness. Besides, by comparing the torque needed during motion from velocity control command in comparison with velocity feedback, torque feedback can be calculated to improve system responsiveness.

Servo driver uses 2 kinds of feedforward gain: Velocity feedforward and torque feedforward.
Velocity feedforward can be used in position control mode. By using it, it can reduce position deviation during constant velocity and increase responsiveness to velocity command.
In position control mode, using feedforward gain, able to reduce position deviation during constant acceleration/deceleration and increase responsiveness to torque command.
In velocity control mode, using feedforward gain, able to reduce velocity deviation during constant velocity and increase responsiveness to torque command.

Velocity feedforward

Velocity feedforward can be used in position control mode. When the function is enabled, it can increase velocity responsiveness, reduce position deviation during constant velocity.

P01.10	**Label**	Velocity feed forward gain			**Valid mode(s)**	**P**		
	Range	0~1000	**Unit**	0.10%	**Default**	300		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0115		
	Valid	Immediate						
	Used for decreasing following error caused by low responsiveness of velocity loop. Might cause overshoot or increase in noise if set value is too high.							
P01.11	**Label**	Velocity feed forward filter time constant			**Valid mode(s)**	**P**		
	Range	0~6400	**Unit**	0.01ms	**Default**	50		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0117		
	Valid	Immediate						

Set velocity feed forward low pass filter to eliminate high or abnormal frequencies in velocity feed forward command. Often used when position command with low resolution or high electronic gear ration to smoothen velocity feed forward.
Position deviation under constant velocity can be lowered with higher velocity feed forward gain. Please refer to the equation below.
Reduce P01.11 value to suppress velocity overshoot during deceleration;
Increase P01.11 value to suppress noise or vibration due to long driver control cycle or position command uneven pulse frequency.


<Application>

Set P01.11 = 50（0.5ms）, improve feedforward effect by gradually increasing P01.10. The equation below can be used to determine the position deviation due to velocity feedforward gain under constant velocity.

Position deviation [Unit]= $\frac{Set\ velocity[\frac{Uint}{s}]}{Position\ loop\ gain[Hz]} x \frac{100 - Velocity\ feed\ foward\ gain[\%]}{100}$

Velocity feedforward application

Set P01.11 to around 50 (0.5ms), then tune P01.10 from 0 to bigger values until the velocity feedforward achieves better performance. Under constant velocity, the position deviation in a motion will decrease as the velocity feedforward gain increase.

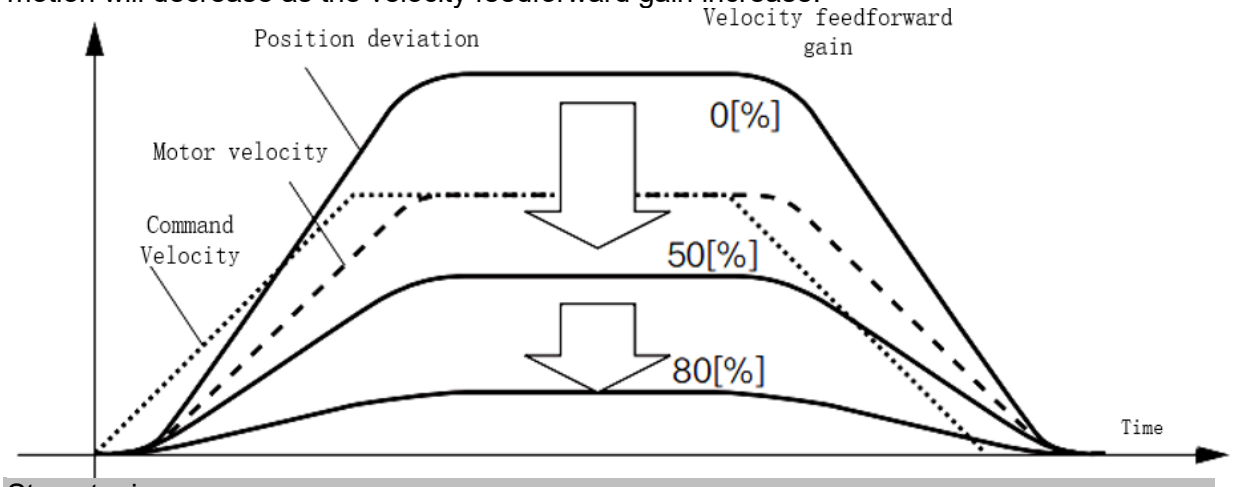

Steps tuning:

1. Increase P01.10 to increase responsiveness but velocity overshoot might occur during acc-/deceleration.
2. By reducing P01.11, velocity feedforward would be more effective and vice versa. P01.10 and P01.11 need to be tuned to a balance.
3. If mechanical noise exists under normal working conditions, please increase P01.11 or use position command filter (1 time delay/ FIR smoothing filter)

Torque feedforward


Position control mode: Torque feedforward can increase the responsiveness of torque command, decrease position deviation during constant acc-/deceleration.
Velocity control mode: Torque feedforward can increase the responsiveness of torque command, decrease velocity deviation during constant velocity.

P01.12	**Label**	Torque feed forward gain			**Valid mode(s)**	**P**	**S**
	Range	0~1000	**Unit**	0.1%	**Default**	0	
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0119	
	Valid	Immediate					
	Before using torque feed forward, please set correct inertia ratio P00.04. By increasing torque feed forward gain, position deviation on constant acceleration/deceleration can be reduced to close to 0. Under ideal condition and trapezoidal speed profile, position deviation of the whole motion can be reduced to close to 0. In reality, perturbation torque will always exist, hence position deviation can never be 0.						

P01.13	**Label**	Torque feed forward filter time constant			**Valid mode(s)**	**P**	**S**
	Range	0~6400	**Unit**	0.01ms	**Default**	0	
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x011B	
	Valid	Immediate					
	Low pass filter to eliminate abnormal or high frequencies in torque feed forward command. Usually used when encoder has lower resolution or precision. Noise reduces if torque feed forward filter time constant is set higher, but position deviation will increase at acceleration varied points. **<Application>** ・ Set P01.13 = 50ms, please increase torque forward gain gradually to enable torque feedforward. ・By increasing P01.13, noise will reduce but position deviation will become larger.						

Torque feedforward application

Set P01.13 to around 50 (0.5ms), then tune P01.10 from 0 to bigger values until torque feedforward achieves better performance. Under constant acc-/deceleration, the position deviation in a motion will decrease as the velocity feedforward gain increase.

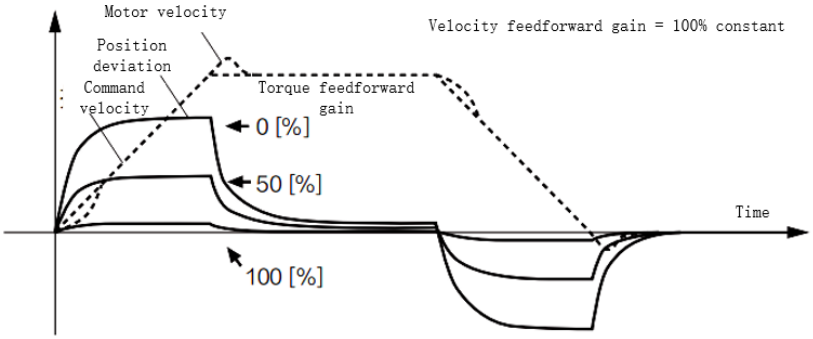


Steps to tuning:

1. Increase P01.12 to increase responsiveness but velocity overshoot might occur during acc-/deceleration.
2. By reducing P01.13, torque feedforward would be more effective and vice versa. P01.12 and P01.13 need to be tuned to a balance and reduce noise.

8.5.6 3rd Gain Switching


Besides switching between 1st and 2nd gain, a 3rd gain switching is added to set gain at the moment of stopping to reduce positioning time.
Only available under position mode and P06.05 ≠ 0, set P06.06 for 3rd gain value. When 2nd gain switches to 1st gain, it has to go through 3rd gain, switching time is set in P01.19.

Diagram below shows when P01.15 = 7.

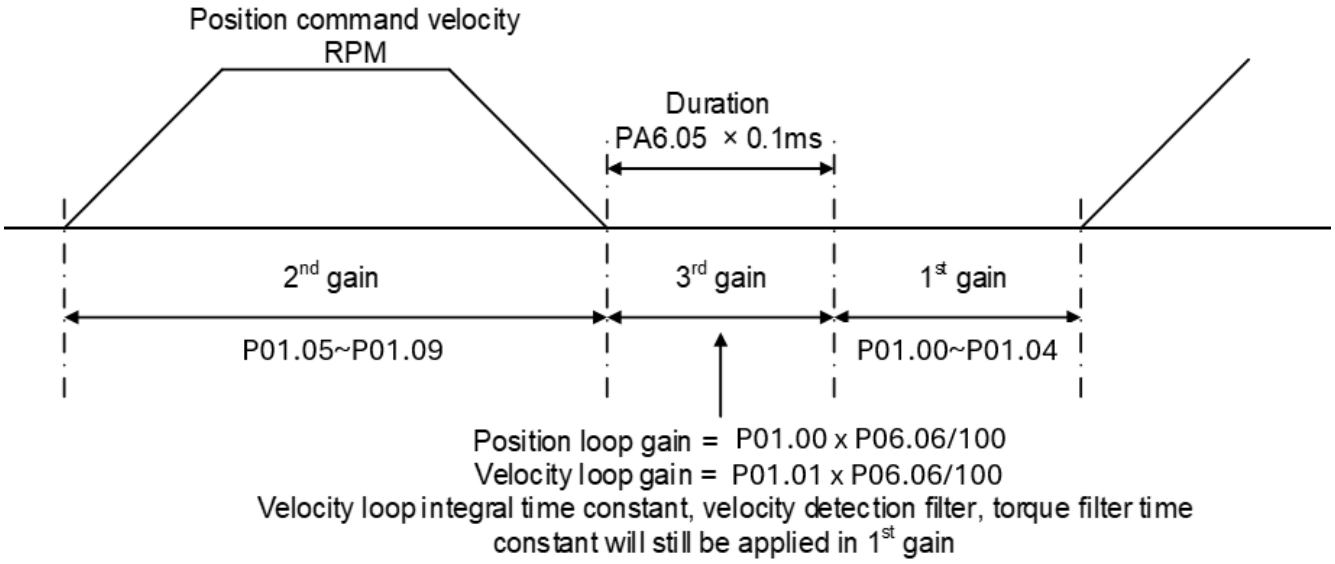


Related parameters

P06.05	**Label**	Position 3rd gain valid time			**Valid mode(s)**	**P**		
	Range	0~10000	**Unit**	0.1ms	**Default**	0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x060B		
	Valid	Immediate						
	To set time for 3rd gain to be valid Only available in position mode When not in use, set P06.05=0, P06.06=100							
P06.06	**Label**	Position 3rd gain scale factor			**Valid mode(s)**	**P**		
	Range	50~1000	**Unit**	100%	**Default**	100		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x060D		
	Valid	Immediate						
	Set up the 3rd gain by multiplying factor of the 1st gain Below diagram is illustrated using P01.15 = 7. 3rd gain= 1st gain * P06.06/100 Only effective under position control mode. 3rd gain valid when P06.05 ≠ 0. Set 3rd gain value in P06.06. When 2nd gain switches to 1st gain, it will go through 3rd, switching time is set in P01.19.							

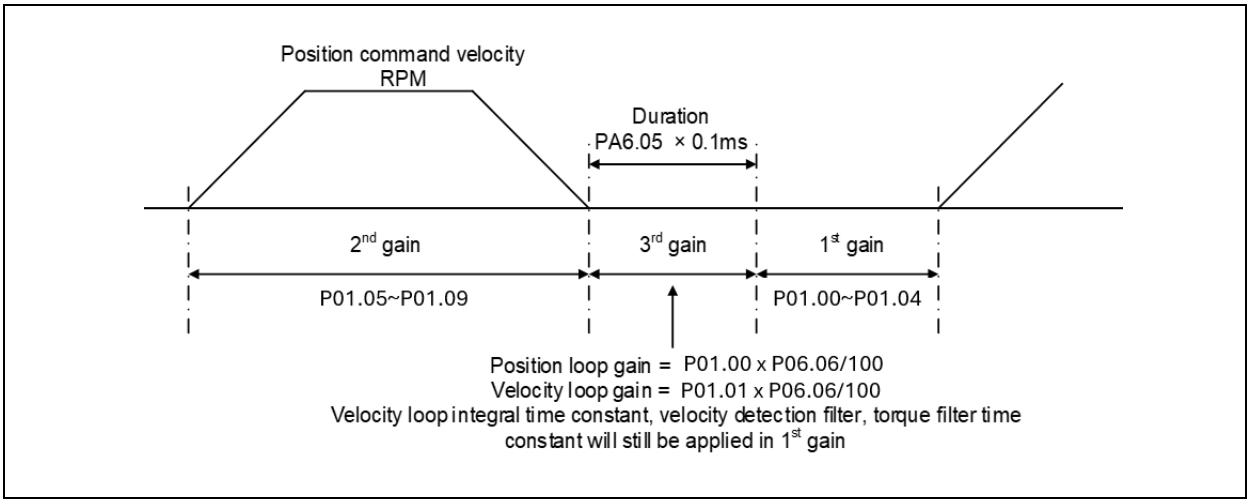
Position command velocity
RPM
Duration
PA6.05 × 0.1ms
2nd gain
3rd gain
1st gain
P01.05~P01.09
P01.00~P01.04
Position loop gain = P01.00 x P06.06/100
Velocity loop gain = P01.01 x P06.06/100
Velocity loop integral time constant, velocity detection filter, torque filter time constant will still be applied in 1st gain

8.5.7 Friction Compensation Function

This function is to compensate for changes in load to reduce the effect of friction in motion. The compensation value is directional.

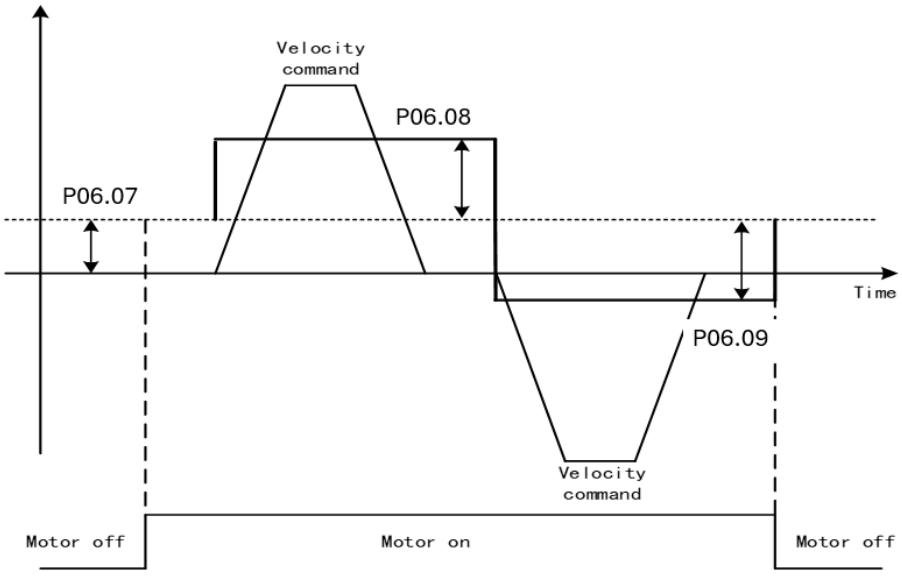

Vertically loaded axis: A constant eccentric load torque is applied on the motor. By adjusting P06.07, positioning deviation due to different motional direction can be reduced.
Belt-driven axis: Due to large radial load with dynamic frictional torque. Positioning time delay and deviation can be reduced by adjusting P06.08 and P06.09.

P06.07	**Label**	Torque command additional value			**Valid mode(s)**	**P**	**S**	**T**
	Range	-100~100	**Unit**	%	**Default**	0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x060F		
	Valid	Immediate						
	To set torque forward feed additional value of vertical axis. Applicable for loaded vertical axis, compensate constant torque. Application: When load move along vertical axis, pick any point from the whole motion and stop the load at that particular point with motor enabled but not rotating. Record output torque value from d04, use that value as torque command additional value (compensation value)							
P06.08	**Label**	Positive direction torque compensation value			**Valid mode(s)**	**P**	**S**	**T**
	Range	-100~100	**Unit**	%	**Default**	0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0611		
	Valid	Immediate						
P06.09	**Label**	Negative direction torque compensation value			**Valid mode(s)**	**P**	**S**	**T**
	Range	-100~100	**Unit**	%	**Default**	0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0613		
	Valid	Immediate						
	To reduce the effect of mechanical friction in the movement(s) of the axis. Compensation values can be set according to needs for both rotational directions.							

Applications:
1. When motor is at constant speed, d04 will deliver torque values.
Torque value in positive direction = T1;
Torque value in negative direction = T2

P06.08/P06.09 = $T_f = \frac{|T1 - T2|}{2}$

Positive/Negative compensation corresponds to actual position feedback.
Positive torque compensation value = +(P06.08=+T_f)
Negative torque compensation value = -(P06.08=+T_f)
P06.08 =x, P06.09=y; friction compensation value = |x-y|/2

8.6 Vibration Suppression

8.6.1 Mechanical Resonance Suppression


Mechanical system has certain resonance frequencies. When servo gain is increased, resonance might occur at around mechanical resonant frequencies, preventing gain value from increasing. In such situation, notch filter can be used to suppress resonance to set higher gains or lower vibration. To suppress mechanical resonance:

1. Torque command filter time constant

Set filter time constant to reduce gain at around resonant frequencies
Torque command filter blocked frequencies（Hz） fc=1/
[2π×PA1.04(0.01ms)×0.00001）]

2) Notch filter

Notch filter suppress mechanical resonance by reducing gain at certain frequencies. When notch filter is correctly set, resonance can be suppressed and servo gain can be increased.

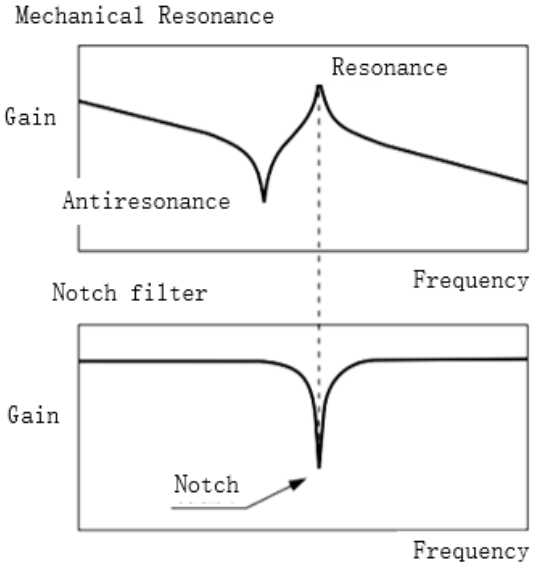



- Notch filter bandwidth

Center frequency of the notch filter, frequency bandwidth with reduction of -3dB.

- Notch filter depth

The ratio between input and output of center frequency.
When depth = 0, center frequency output is totally off and when depth = 100,
Hence when notch filter depth is set at lower value, the depth is higher and better at suppressing mechanical resonance, but it might cause system instability.

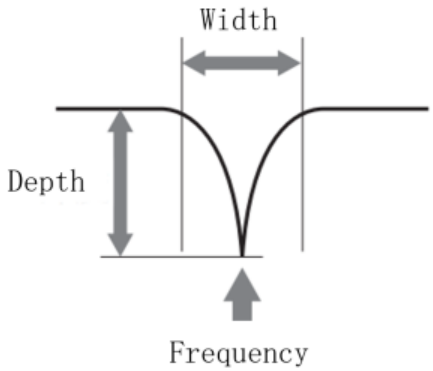

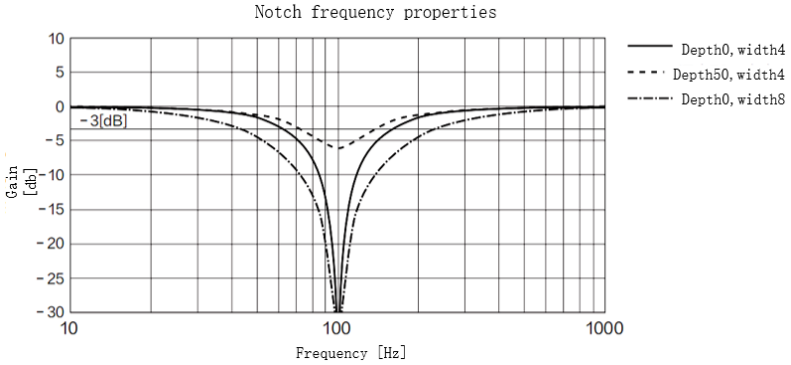

If the analytic result from mechanical properties analysis tool doesn't show any obvious peak but vibration did occur, it might not be due to mechanical resonance, it may be that servo gain has reached its limit. This kind of vibration can't be suppressed by using notch filter, only by reducing gain and torque command filter time.

To use notch filter

Automatic notch filter


1. Set P02.00 = 1 for auto notch filter adjustment
2. If P00.03 stiffness increases, 3rd group of notch filter (P02.07/P02.08/P02.09) updates automatically when driver is enabled. P02.00 = 0, auto adjustments stop.
   If resonance is suppressed, it means self-adjusting notch filter is working. If resonance occurs when mechanical stiffness increases, please use manual notch filter, set filter frequency to actual resonant frequency.

Manual notch filter

There are 2 ways to use manual notch filter.

1. After enabling self-adjusting notch filter, set the values from 3rd group of filters to 1st group of notch filter (P02.01/P02.02/P02.03), see if resonance is suppressed. If there is other resonance, set P02.00 = 1, then set the values from 3rd group of filters to 2nd group of notch filter (P02.04/P02.05/P02.06)
2. Get resonant frequency, notch filter bandwidth and depth and set it into the corresponding parameters through EDrive.


8.6.2 End Vibration Suppression

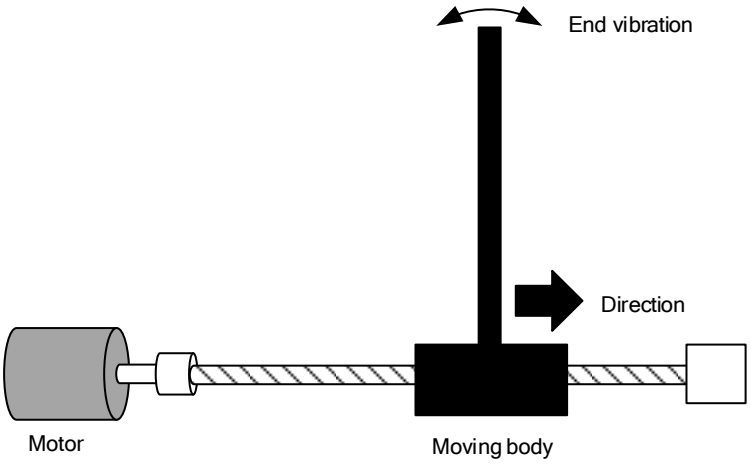


If the mechanical has an end that is long and heavy, it might cause end vibration at emergency stop and affect the positioning. Usually happens on long armed axis with loose end. The frequency is usually within 100Hz which is lower than mechanical resonant frequencies. It is called low-frequency resonance which can be prevented by applying low frequency suppression function.

To apply low frequency suppression

1. Trace current/ position deviation waveform when motion stops.
2. Measure the vibration cycle T1 of current waveform.
3. Convert T1 into low frequency resonance by F1 = 1/T1
4. Write F1 into P02.14
5. If some other low frequency resonance occurs, please repeat step 1-3 and write F2 into P02.16.

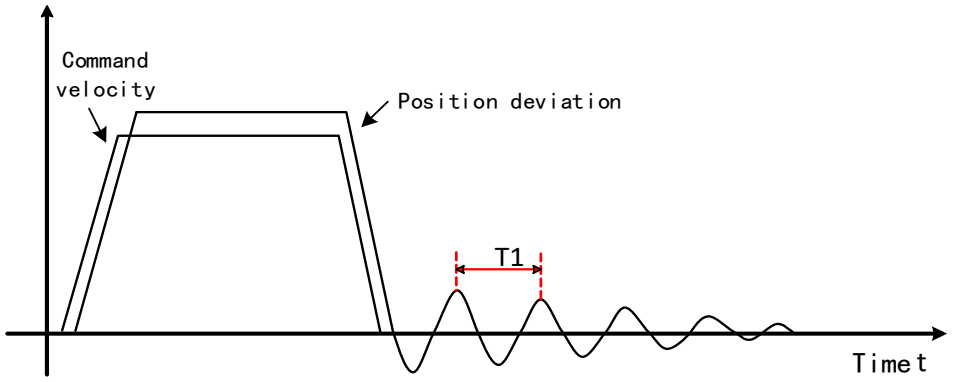


The result of suppressing low frequency resonance

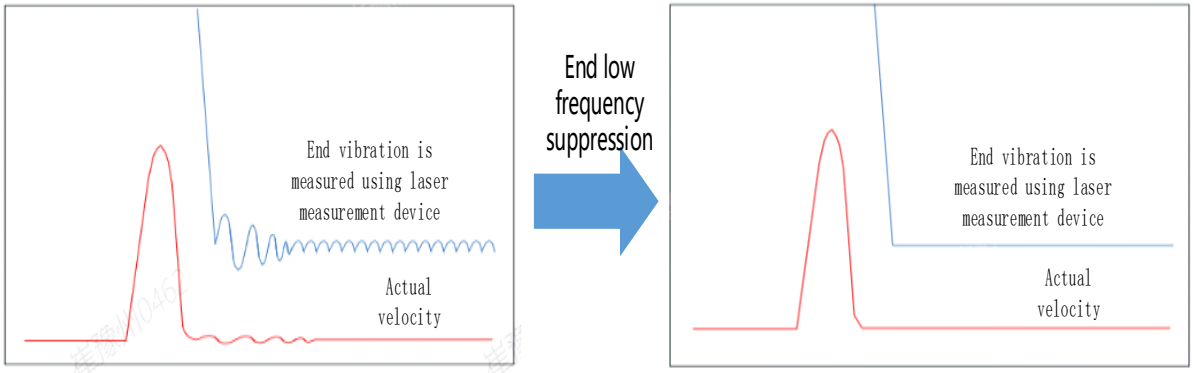

8.6.3 Mechanical Properties Analysis

To determine mechanical and set up notch filter parameters to suppress vibration caused by resonance.

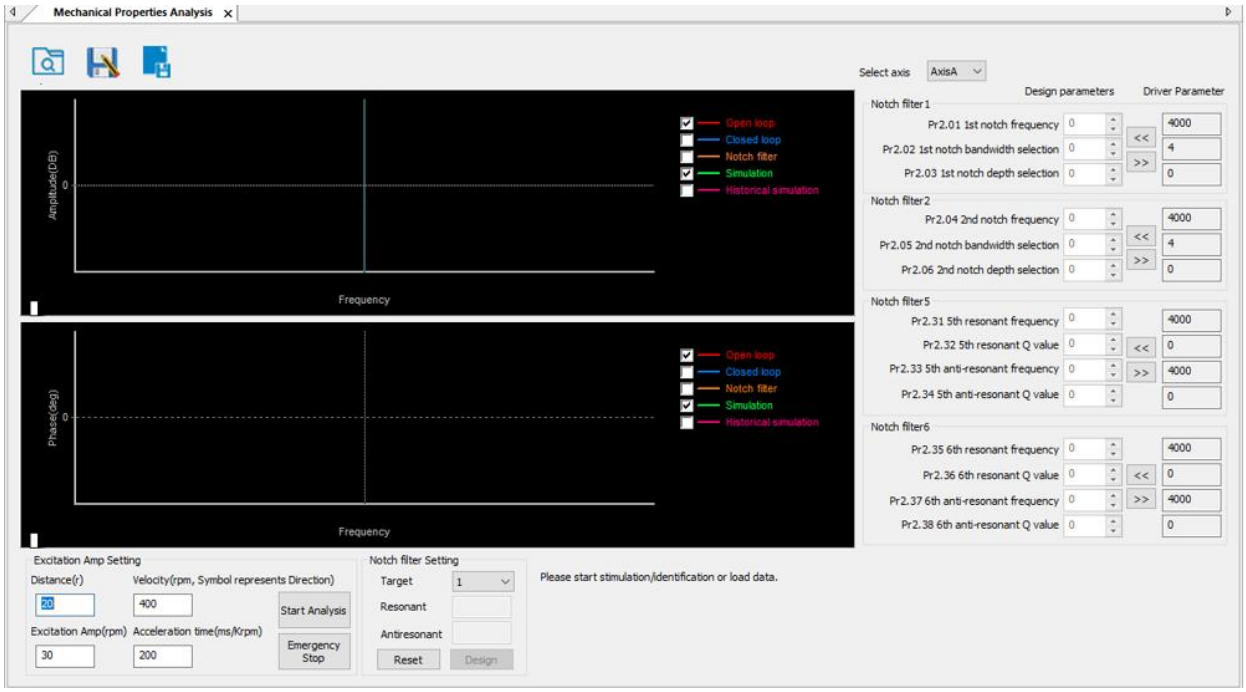


To avoid strong vibration, please first set lower excitation amplitude. However, if the set value is too low, data waveform will include some degree of distortion.
If vibration occurs during tests which can't be reduced through lowering electrical current excitation, it might be due to excessive gain. Please lower velocity gain and set notch filter as accordance with the mechanical properties analysis. Or might be due to inertia settings (P00.04) is too large, please use optimal inertia ratio value.

Chapter 9 Modbus Communication


There are 2 types of Modbus communication on E-DHAS□□P series servo drivers: RS485 and RS232. RS232 is used for point-to-point communication connecting the driver to PC through a USB type-C cable for tuning using EDrive. RS485 can be set to communicate with multiple slave devices as a single master. Network control of drivers can be achieved through CN3/CN4 ports.

9.1 RS232 and RS485 Connection Diagram.

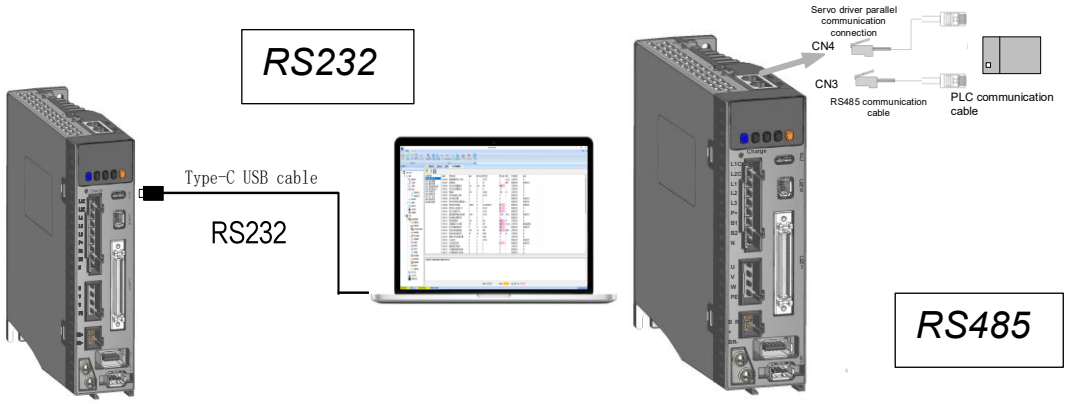


RS485 network of multiple servo drivers

If there is a need to connect multiple E-DHAS□□P series servo drivers together, it is recommended to connect the drivers in series and no longer than 3 meters of LAN cable between each nodes (drivers) as shown below.

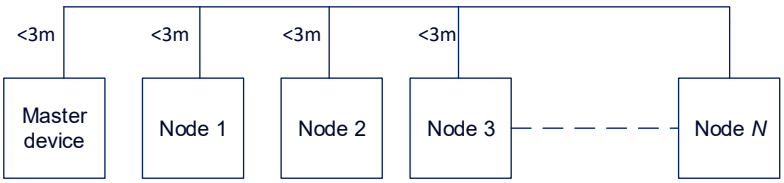

- Keep the connection cable between each node as short as possible. Not longer than 3m.
- Install a terminal resistor each end. Recommended resistance: 120 Ohm.
- Please use shielded twisted pair connection cables.
- Connect to reference ground of the driver.
- Connect shielded foil of the cables to Protective Earth PE terminal.
- Please separate them from power cable or any cable with strong interference.

9.2 RS485 communication port

Port	Diagram	Pin	Signal	Description
CN3 CN4		1，9	RDO+	RS485 Differential signal+
		2，10	RDO -	RS485 Differential signal-
		3，11	GND	Ground（RS485）
		4，12	TXD+	RS485 Differential signal+
		5，13	TXD-	RS485 Differential signal-
		6	VCC5V	Reserved，5V positive（50mA）
		7，15	GND	Ground
		8，16	/	/
		Frame	PE	Shield grounding

Parameters related to RS485 communication

P05.29	Label	RS485 communication mode			Valid mode(s)	P	S	T
	Range	0~255	Unit	—	Default	5		
	Byte length	16bit	Attribute	R/W	485 address	0x053B		
	Valid	After restart						

Value	Bit	Checksum	Stop
0	8	Even	2
1	8	Odd	2
2	8	Even	1
3	8	Odd	1
4	8	Null	1
【5】	8	Null	2

P05.30	Label	RS485 communication Baud rate			Valid mode(s)	P	S	T
	Range	0~15	Unit	—	Default	4		
	Byte length	16bit	Attribute	R/W	485 address	0x053D		
	Valid	After restart						

Value	Baud rate
0	2400bps
1	4800bps
2	9600bps
3	19200bps

Value	Baud rate
【4】	38400bps
5	57600bps
6	115200bps

Baud rate tolerance: 2400～38400bps±0.5%, 57600～115200bps±2%

P05.31	Label	RS485 axis address			Valid mode(s)	P	S	T
	Range	0~127	Unit	—	Default	1		
	Byte length	16bit	Attribute	R/W	485 address	0x053F		
	Valid	After restart						

When controller is connected to multiple axis and controller needs to identify the axis, P05.31 can be used to set the axis ID/address.
Please set to a max of 31 if the communication is between RS232 and RS485

9.3 Modbus Protocol

E-DHAS□□P series servo drivers contain 16-bit and 32-bit parameters. The parameters supports read and write functions in the Modbus-RTU protocol with function codes as listed in the table below.

Operation	Function code
Read 16/32 bit parameters	0x03

Write 16 bit parameters	0x06
Write 32 bit parameters	0x10

Parameters class 0 – 7 are 32 bits data but mostly only applicable up to 16 bit. To make it convenient for users to read the data, any byte length written in the parameters list only shows that the data is using 16 bit lower-level data, but it is actually a 32 bit data.

Using P00.00 as an example, the 485 address shows 0x0001. It is actually high 0x0000 and low 0x0001 data.

P00.00	**Label**	Model-following/Zero tracking control			**Valid mode(s)**	**P**		
	Range	0-2000	**Unit**	0.1Hz	**Default**	1		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0001		
	Valid	At stop						

Model-following bandwidth, also known as model-following control (MFC), is used to control the position loop to improve the responsiveness to commands, speed up positioning time and reduce following error. The effect is obvious especially in low and medium mechanical stiffness.

Value	Description
0	Disable model following/zero tracking control
1	Set bandwidth automatically
2~9	Reserved
10~2000	Manually set control bandwidth. 30~100 recommended for belt application

9.3.1 Read Data 0x03

The function code for reading data from the drive is **0x03**, which allows reading from **1 to 100** 16-bit data units.
Example: Assuming the slave ID of the drive is 1, and we want to read 2 data units. (H = high 8 bits, L = low 8 bits)

No.	Request frame data（Master->Slave）				Reply frame data（Slave->Master）		
1	**ID**	Slave	0x01		**ID**	Slave	0x01
2	**FC**	Function code	0x03		**FC**	Function code	0x03
3	**ADDR**	Starting address	H		**NUM**	Data count（byte）	0x00(H)
4			L				0x04(L)
5	**NUM**	Data count（word）	0x00(H)		**DATA1**	Data 1	H
6			0x02(L)				L
7	**CRC**	Checksum	L		**DATA2**	Data 2	H
8			H				L
9					**CRC**	Checksum	L
10							H

Communication Example:

Send	01 03 00 00 00 02 C4 0B
Receive	01 03 04 00 00 00 01 3B F3

Send frame asks slave ID 1 to return 2 words (32-bit total) from address 0x0000. CRC = 0x0BC4.
Received frame returns 4 bytes of data 0x00000001. CRC = 0xF33B.

9.3.2 Write Single Data Function Code 0x06

The function code for writing a single data item to the drive is **0x06**, which writes one 16-bit data word.
Example: Write one word of data to slave ID 1 (H = high byte, L = low byte).

No.	Request frame data（Master->Slave）				Reply frame data（Slave->Master）		
1	**ID**	Slave	0x01		**ID**	Slave	0x01
2	**FC**	Function code	0x06		**FC**	Function code	0x06
3	**ADDR**	Starting address	H		**ADDR**	Starting address	H
4			L				L
5	**NUM**	Data count （word）	0x00(H)		**DATA1**	Data 1	H
6			0x02(L)				L
7	**CRC**	Checksum	L		**CRC**	Checksum	L
8			H				H

The response frame should be identical to the request frame.
Communication Example:

Send	01 06 00 01 00 01 19 CA
Receive	01 06 00 01 00 01 19 CA

Send frame: means the master writes 0x0001 to slave ID 1 at address 0x0001. the CRC checksum for the first 6 bytes is 0xCA19.
Receive frame: echoes the request, confirming success.

9.3.3 Write Multiple Data 0x10

Function code 0x10 is to write multiple 16-bit data into servo driver. For example, from servo driver to slave as 1 and reading 2 data. (H: High 8-bit, L: Low 8-bit).

No.	Request frame data（Master->Slave）				Reply frame data（Slave->Master）		
1	**ID**	Slave	0x01		**ID**	Slave	0x01
2	**FC**	Function code	0x03		**FC**	Function code	0x03
3	**ADDR**	Starting address	H		**ADDR**	Address	H
4			L				L
5	**NUM1**	Data count（word）	0x00(H)		**NUM**	Data count（word）	H
6			0x02(L)				L
7	**NUM2**	Data count（Byte）	0x04 (2*NUM1)		**CRC**	Checksum	L
8	**DATA1**	Data 1	H				H
9			L				
10	**DATA2**	Data 2	H				
11			L				
12	**CRC**	Checksum	L				
13			H				

Servo parameters are 32-bit with high 16-bit at the front and low 16-bit at the back. 2 continuous communication addresses will be distributed starting with even number (High 16-bit uses even number address, low 16-bit uses odd number address. Word byte frame word is also with high 8-bit at the front and low 8-bit at the back.

32-bit data written from starting address 0x0000 (Servo driver with axis address 01):

Send	01 10 00 00 00 02 04 00 00 00 00 F3 AF
Receive	01 10 00 00 00 02 41 C8

Send Frame: Request Frame. Master device writes a 2 Word (16 bit), 4 bytes data (0x0000 0000) into slave servo driver with ID no. 1 (Address 0x0000). 11-byte CRC value is 0xAFF3 before frame sending.

Receive Frame: Reply frame. Master device writes a 2 Word value into slave servo driver with ID no. 1 (Address 0x0000). 6-byte CRC value is 0xC841 before frame sending.

9.3.4 Reply Error

When driver receives request frame data format with error, driver will feedback error reply data frame to master device.

No.	Error reply frame data (Slave->Master)		
1	**ID**	Slave ID	0~31
2	**FC**	Function code	(0x03/0x06/0x10)+0x80
3	**Error code**	Address	0x01/0x02/0x03
4	**CRC**	Checksum	L
5			H

Error code table:

Error code	Description
0x01	Function code error
0x02	Address error
0x03	Data error, i.e. written data over limit
0x08	CRC checksum error

Communication data:

Receive frame: Slave servo driver's reply frame. Request frame data CRC from master device, servo driver will not respond to current request.

Send	01 11 00 04 00 02 04 01 00 00 00 F3 A0
Receive	01 91 08 4C 56


Receive frame: Slave servo driver's reply frame. Request frame data function from master device error or slave station does not support this function, unable to respond to current request.

Send	01 11 00 04 00 02 04 01 00 00 00 A2 65
Receive	01 91 01 8C 50

9.4 Frequently Occurred Issues and Solutions with RS485 Communication.

9.4.1 Frequently Occurred Issues


Terminal resistor

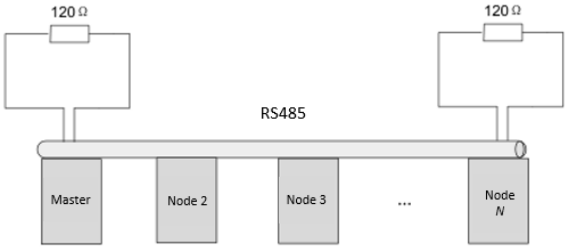

Terminal resistor is to be connected at the start and end of the device network. Recommended resistance of the terminal resistor: 120 Ohm. Measure the resistance within the network using a multimeter and refer to the table below.


Measured resistance (Ohm) **Normal: 60 Ohm**	Description
0	Short circuit
Much lower than 60	Might be other resistor within the network; incorrect terminal resistor is used
Much higher than 60	Might be due to damaged/faulty node communication port

Incorrect wiring connection

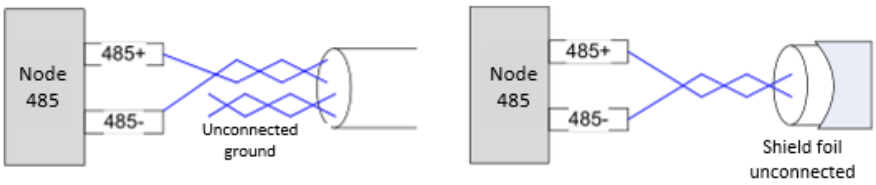


Please make sure RS485 communication connection is normal using a multimeter. Then, make sure the reference ground is corrected connected. If there is not no reference ground, please leave it unconnected. Same goes for cable shield foil.

Signal interference

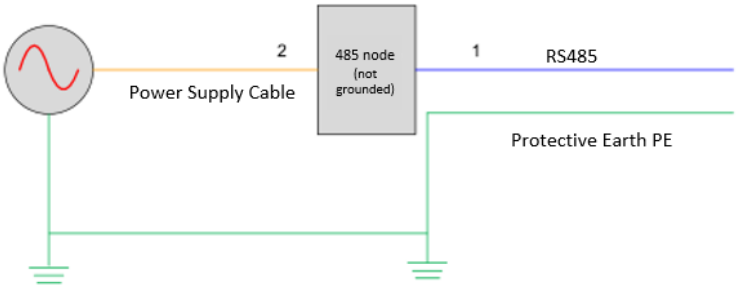

External interference: Magnetic ring can be intertwined within cable 1 and 2 to prevent external interference.

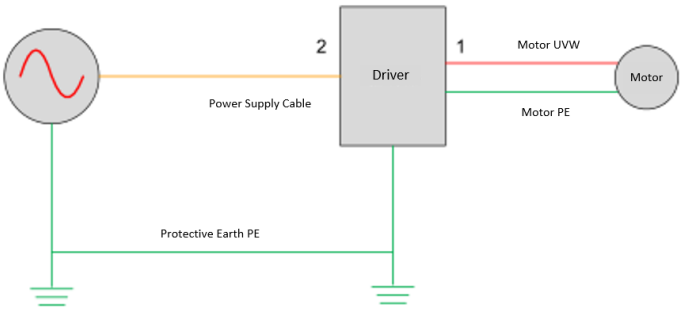


Driver interference: If interference occurs within the driver, please intertwine magnetic rings on cable 1 and 2. Please loop UVW cables around the magnetic ring for at least 3 rounds. Do not loop PE wire into the magnetic ring.

9.4.2 Step-by-Step Problem Solving


1: Verify if communication parameters setting are correct (ID not repeated, uniform Baud rate and data format);
2: If terminal resistor used is correct;
3: If wiring connection is correct;
4: Verify grounding and PE connection;
5: Communication cables should be separated from power cables.

Servo drivers are devices of good anti-interference. However, during installation, interference still might occur due to wiring and grounding issues. Please refer to the table below if such problems persist.

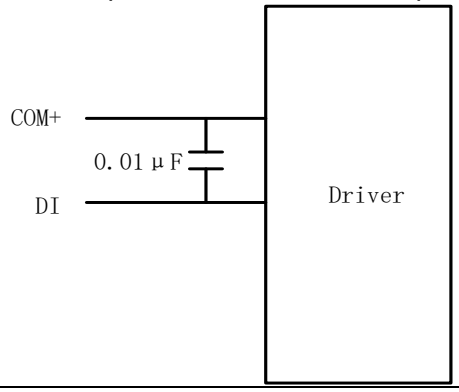Steps	Solutions
1	Use shielded wire cable for I/O signals, connect shield foil to PE.
2	Connect motor PE to PE terminals on drivers, connect driver PE to PE terminals of electrical network.
3	Ground master device and servo drivers together.
4	Loop UVW motor power cable around magnetic ring for 2-3 times.
5	Loop signal cable around magnetic ring for 1-2 times.
6	Use shielded cable for power cables. Connect shield foil to ground.
7	Connect a capacitance filter onto DI input. Max capacitance: 0.1 μF 

Chapter 10 PR Function

PR function is a control module in servo driver that controls single axis motion using Procedure program. Main single axis motion control functions included homing, path, position limit and emergency stop. Using PR functions can save resources on the main controller.

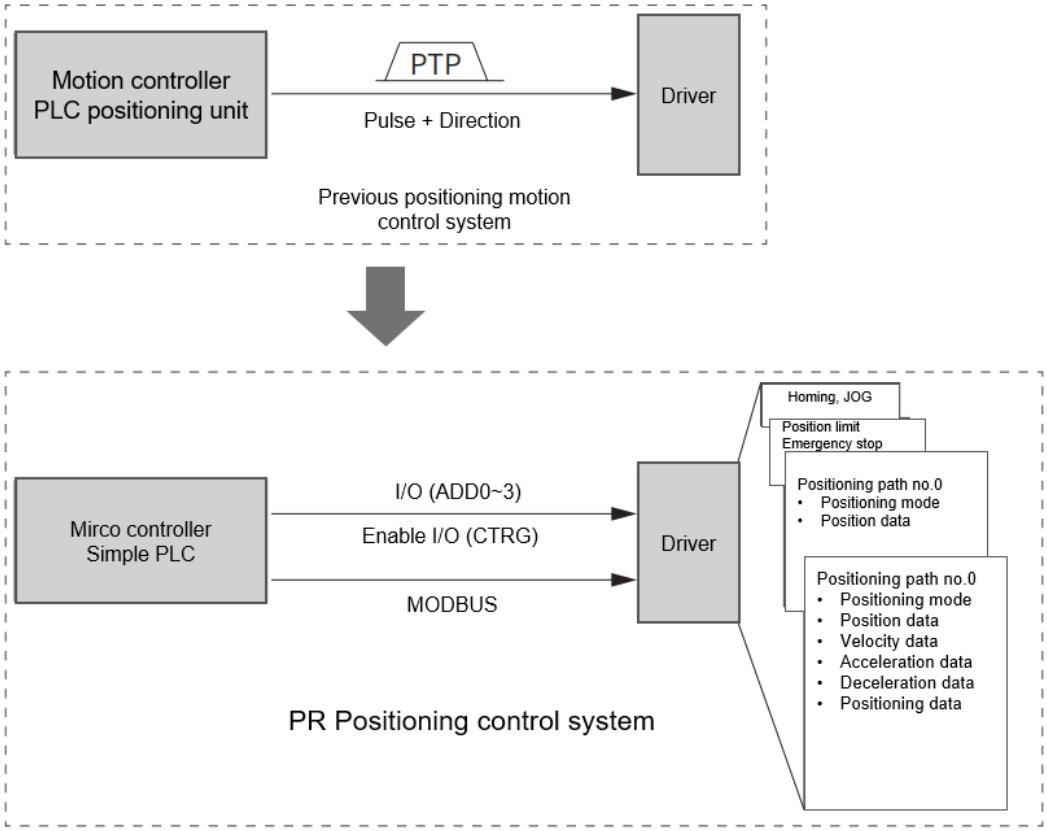

- When using PR function, set parameter P00.01 to 6. In PR control mode, all positions use 10000 pulses/rev as unit.

- When setting PR parameters via front panel, note that parameter numbers are displayed in hexadecimal.

Example: P08.15 shown on the panel means "15" is in hex, which equals decimal 21. So P08.15 on the panel corresponds to P08.21 in the software or manual.

10.1 PR Function Introduction

Function	Description
Homing	Driver seeks origin signal through homing to determine zero point of the mechanical motion coordination system 1. Homing mode configurable. Can be chosen between position limit signal homing, origin signal homing and manually set home. 2. Homing direction configurable. 3. Specific position can be set after homing completed. 4. Homing velocity, acceleration and deceleration configurable. 5. High homing velocity to locate origin and low homing velocity to look for Z-signal.
JOG	Forward/Reverse JOG through I/O control. Used for tuning. 1. JOG direction: forward JOG, reverse JOG 2. JOG velocity and acceleration configurable
Position limit	Prevent mechanical damage by limiting the range of motion 1. Positive/Negative position limit input through I/O 2. Software position limit 3. Position limit deceleration configurable
Emergency stop	Emergency stop input signal through I/O. To stop any operating motion
Path motion	Select path ID through IO（ADD0-3）, then trigger path motion through enable IO（CTRG）; or directly through I/O combination mode; path motion can be controlled directly through 485 communication as well 1. Path motion includes positioning, velocity and homing modes. 2. I/O trigger includes rising edge, double edges trigger. 3. Supports continuous positioning. 4. Max. 16 paths. 5. Configurable position, velocity and acceleration/deceleration. 6. Pause time/ timer configurable.
485 communication	PR parameter R/W through 485 communication. Control PR functions such as homing, JOG, path motion, emergency stop, etc.

10.2 Control Parameters

All PR motion related parameters including trigger, status output, limits, emergency stop, JOG, homing, etc.


Parameter	Label	Description	485 Addr.
P08.00	PR Control	PR control functions Bit 0：=0，CTRG rising edge trigger =1，double edges trigger Bit 1：=1，software position limit valid =0，software position limit not valid Bit 2：=1, homing upon power on =0，no homing upon power on Bit 3：=1，absolute value memory =0，absolute value with no memory	0X6000
P08.01	Path count	16 paths	0X6001
P08.02	Control Operation	--	0X6002
P08.06	Software positive limit H	High 16-bit of software positive limit	0X6006
P08.07	Software positive limit L	Software positive limit（Only able to read low 16-bit using 485 communication）	0X6007
P08.08	Software negative limit H	High 16-bit of software negative limit	0X6008
P08.09	Software negative limit L	Software negative limit（Only able to read low 16-bit using 485 communication）	0X6009
P08.10	Homing mode	Homing method in PR mode Bit 0：Homing direction =0：Reverse =1： Forward Bit 1：Specific position after homing =0：No =1：Yes Bit2~7：Homing mode =0：Position limit homing =1：Origin homing =2：Single turn Z homing =3：Torque homing =8：Immediate homing Bit 8： =1: Homing with Z-signal = 0: Homing without Z-signal *Single turn Z homing is homing method within 1 revolution, has nothing to do with Bit 8 Z-signal.*	0X600A
P08.11	Zero position H	High 16-bit of zero position	0X600B
P08.12	Zero position L	Zero position（Only able to read low 16-bit using 485 communication）	0X600C
P08.13	Home position offset H	High 16-bit of home position offset	0X600D
P08.14	Home position offset L	Home position offset（Only able to read low 16-bit using 485 communication）	0X600E
P08.15	High homing velocity	Set high homing velocity	0X600F
P08.16	Low homing velocity	Set low homing velocity	0X6010

P08.17	Homing acceleration	Set homing acceleration	0X6011
P08.18	Homing deceleration	Set homing deceleration	0X6012
P08.19	Homing torque holding time	Set homing torque holding time	0X6013
P08.20	Homing torque	Set homing torque value	0X6014
P08.21	Homing overtravel alarm range	Set homing overtravel alarm threshold, set to 0 to deactivate the alarm	0X6015
P08.22	Emergency stop at limit deceleration	Set position limit emergency stop deceleration	0X6016
P08.23	STP emergency stop deceleration	Set STP emergency stop deceleration	0X6017
P08.26	I/O combination trigger mode	0：Disable I/O combination trigger mode. Uses I/O CTRG signal edge trigger. 1：Enable I/O combination trigger. Valid when HOME-OK signal is valid. 2：Enable I/O combination trigger. HOME-OK signal not required.	0X601A
P08.27	I/O combination filter	Set I/O combination filter time	0X601B
P08.28	S-code current output value	Display S-code output	0X601C
P08.29	PR warning	=0: Reset new command automatically =0x100: Position limit error during homing =0x101: Emergency stop. Homing not completed =0x20x: Position limit error on Path *N*	0X601D
P08.39	JOG velocity	Set JOG velocity	0X6027
P08.40	JOG acceleration	Set JOG acceleration	0X6028
P08.41	JOG deceleration	Set JOG deceleration	0X6029
P08.42	Command position H	High 16- bit of command position	0X602A
P08.43	Command position L	Command position (Only able to read low 16-bit using 485 communication)	0X602B
P08.44	Motor position H	High 16- bit of motor position	0X602C
P08.45	Motor position L	Motor position (Only able to read low 16-bit using 485 communication)	0X602D
P08.46	Input	Input status	0X602E
P08.47	Output	Output status	0X602F
P08.48 - P08.63	S-code setting	Path *N* S-code output settings	0x6030 ~ 0x603F

10.3 PR Motion

10.3.1 Homing

Homing is divided into 5 methods according to home signal: Single turn Z-phase homing, position limit homing, origin homing, torque homing, manually set home. Position limit homing, origin homing and torque homing can be with or without Z-signal. Homing can be triggered upon power on or using I/O after servo enabled.
Homing sequence diagram

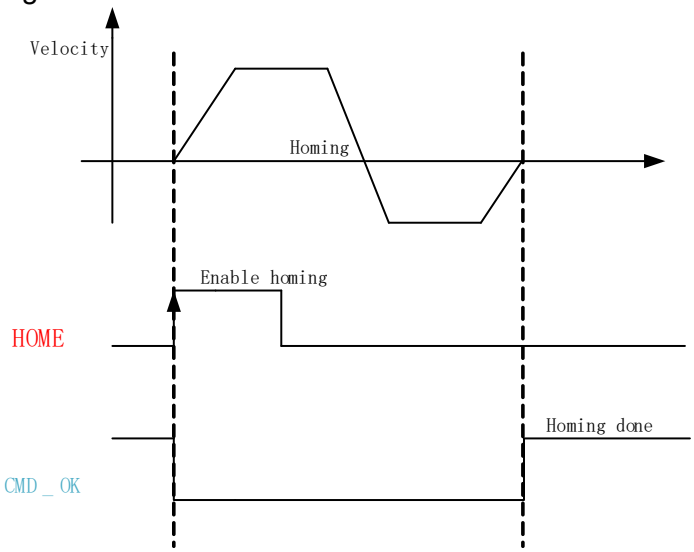

1. **HOME**: Homing trigger signal. When HOME is valid, homing will be done according to set homing method.
2. **CMD_OK**: Command completed signal. Invalid when command is being carried out, valid when command is done.
3. Please refer to P08.10 to set homing methods and other homing mode related settings. It is recommended to use EDrive to modify the control parameters in PR mode.


P08.10	Label	Homing mode			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X600A

To set homing method in PR mode. It is recommended to modify PR control parameters using EDrive.


Bit	8（Z-signal homing）	2-7（Homing mode）	1（Specific position after homing）	0（Homing direction）
Description	=1, homing with Z-signal =0, homing without Z-signal	=0 Limit homing =1 Origin homing =2 Single turn Z homing =3 Torque homing =8 Immediate homing	=1, Yes =0, No	=1, Forward =0, Reverse

Position limit, origin and torque homing with Z-signal


1. Negative limit homing

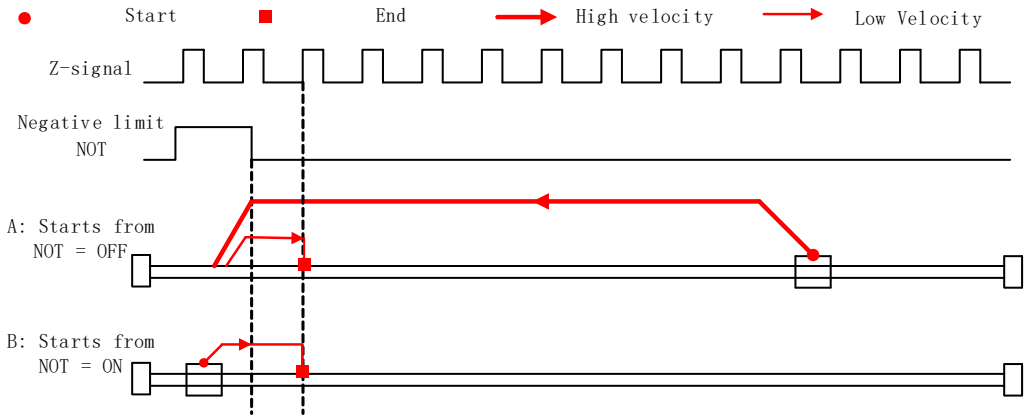


2. Positive limit homing

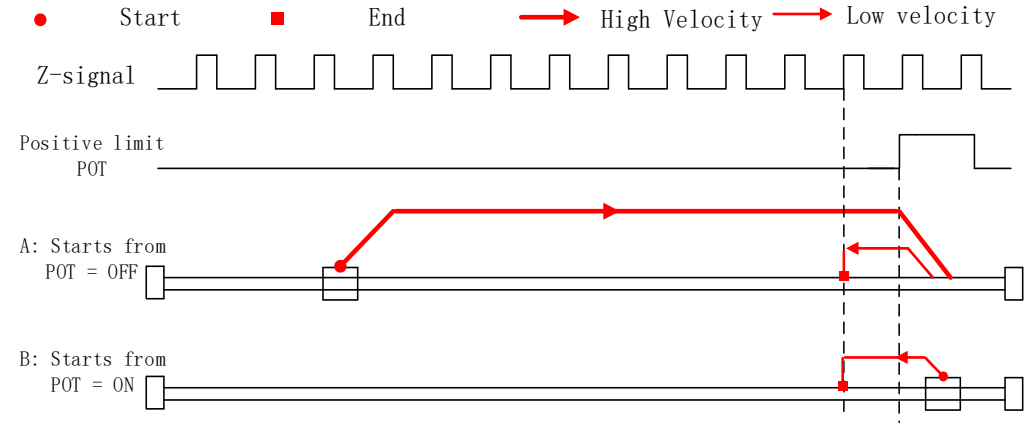


3. Origin homing – Negative direction

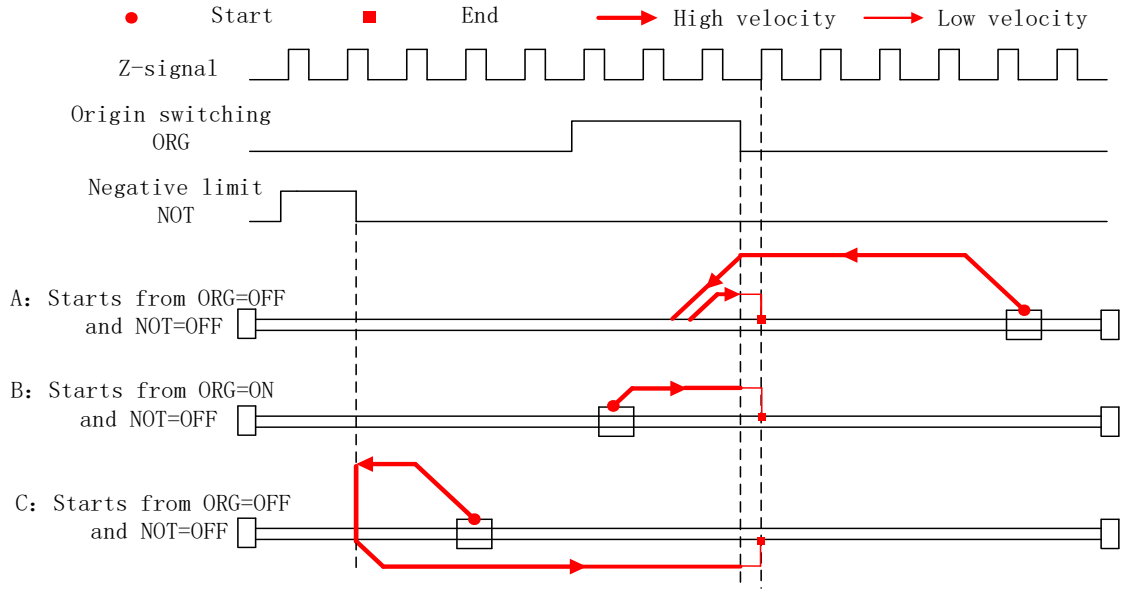


4. Origin homing – Positive direction

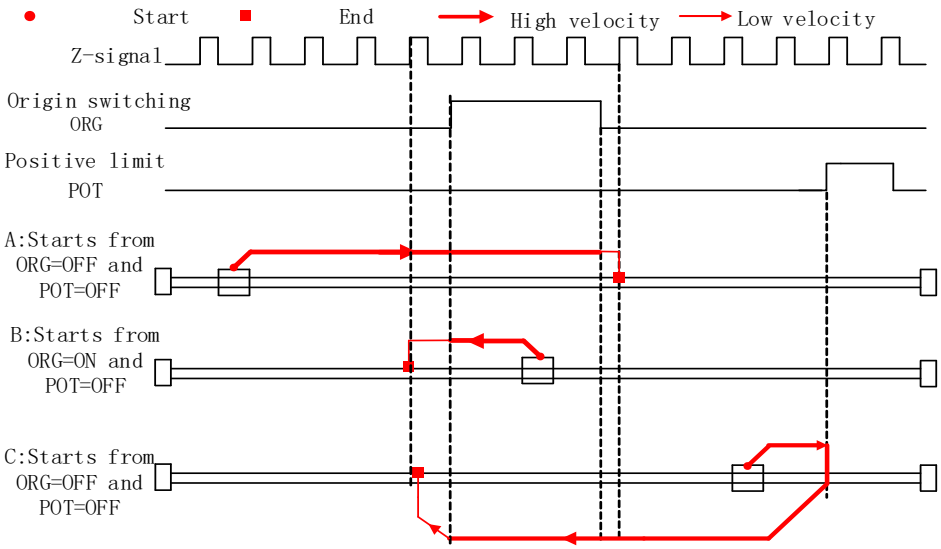

5. Torque homing – Negative direction

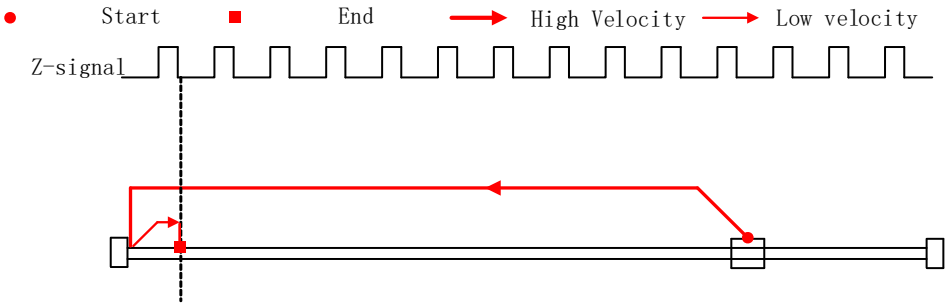


6. Torque homing – Positive direction

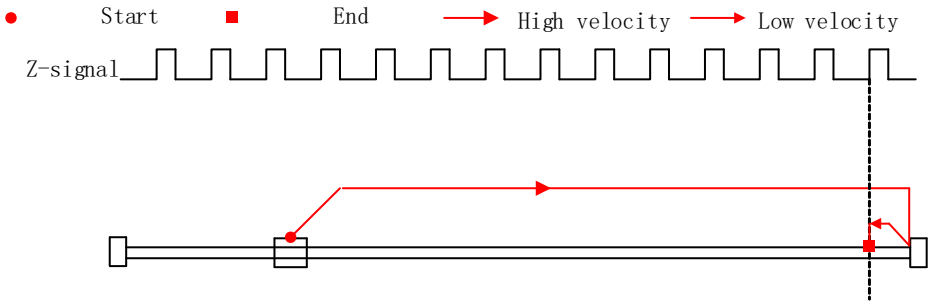

Position limit, origin, Z-signal, torque and manual set home (Homing with single condition)


1. Negative limit homing

Start End High velocity Low velocity

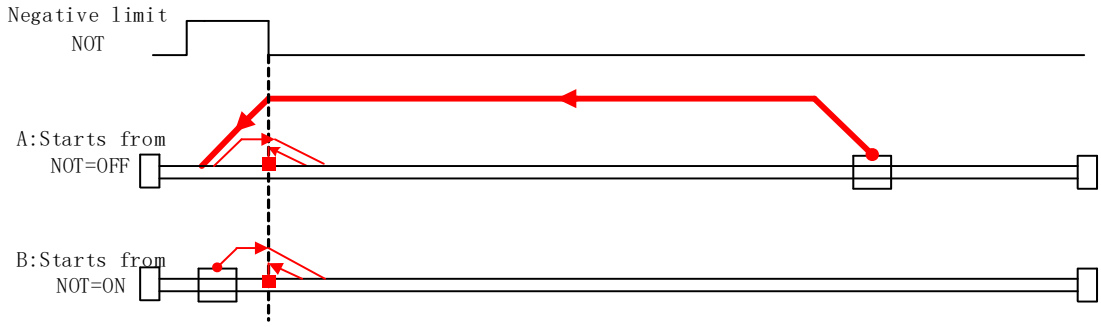


2. Positive limit homing

Start End High velocity Low velocity

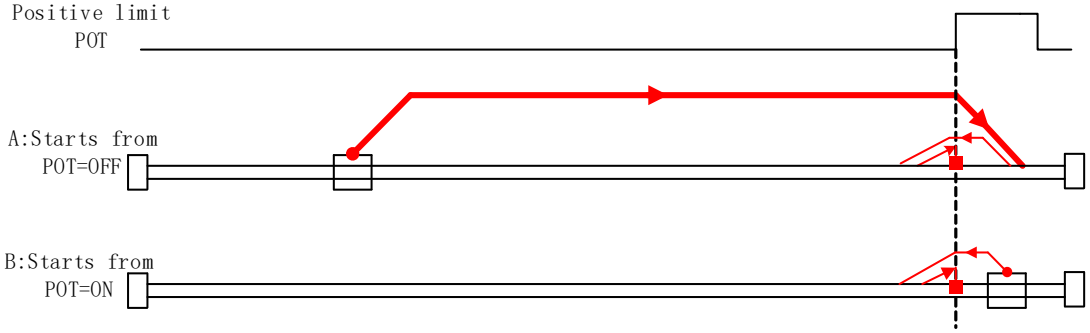


3. Origin homing – Negative direction


Start End High velocity Low velocity

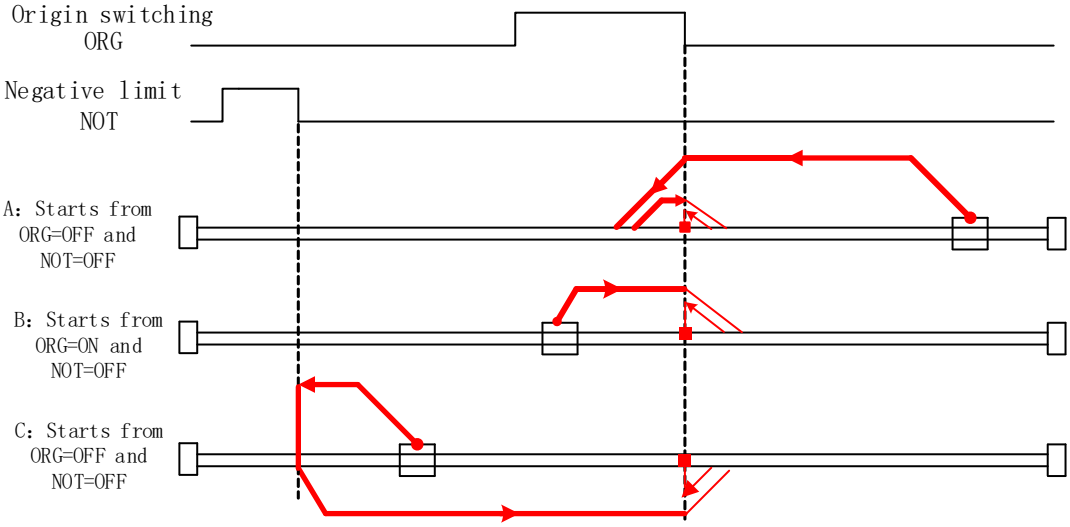


4. Origin homing – Positive direction

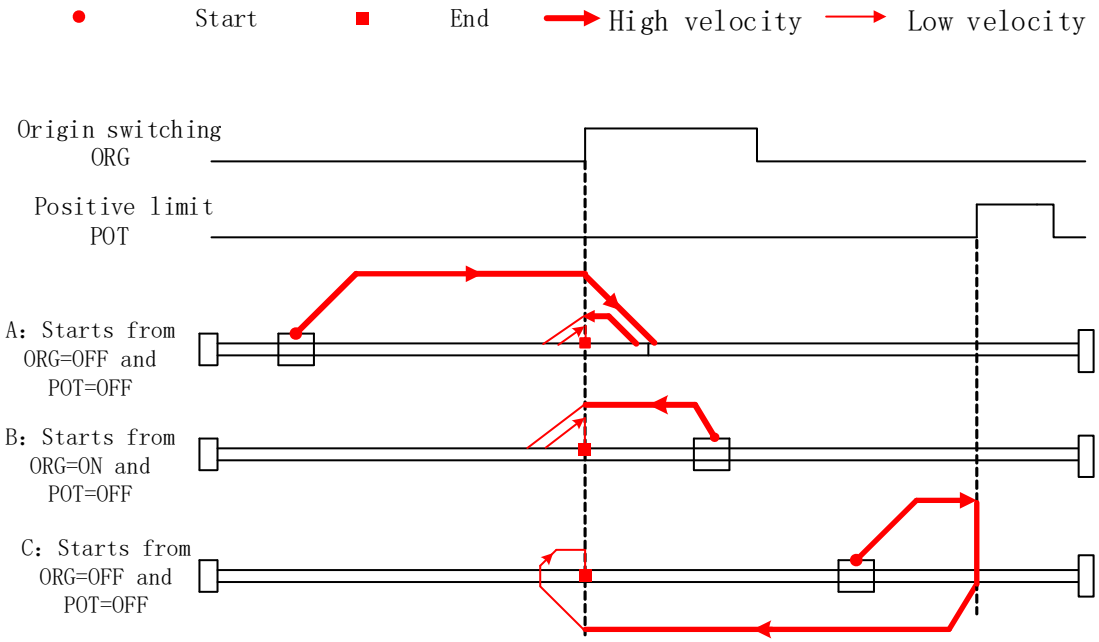

5. Torque homing – Negative direction

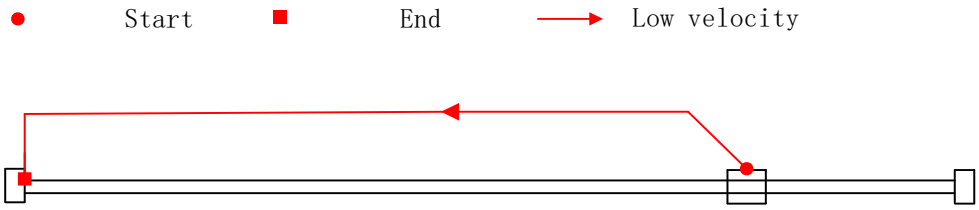


6. Torque homing – Positive direction

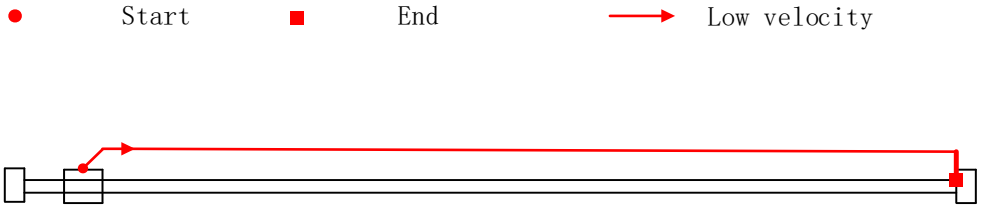


10.3.2 Position Limit and Emergency Stop

For safety concerns, PR mode is designed to trigger emergency stop when position limit or emergency stop signal is valid. Please refer to the sequence diagram below.

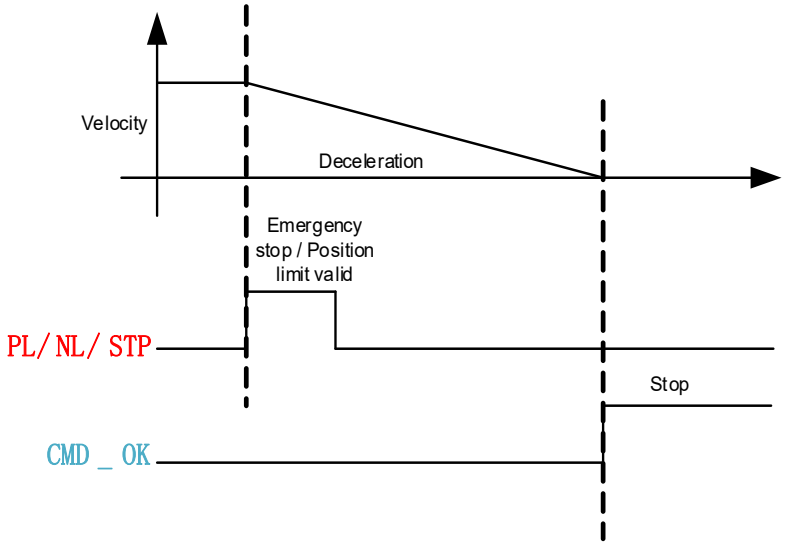

10.3.3 JOG

JOG is used to make tuning more convenient. Please refer to the sequence diagram below for motion profile during JOG

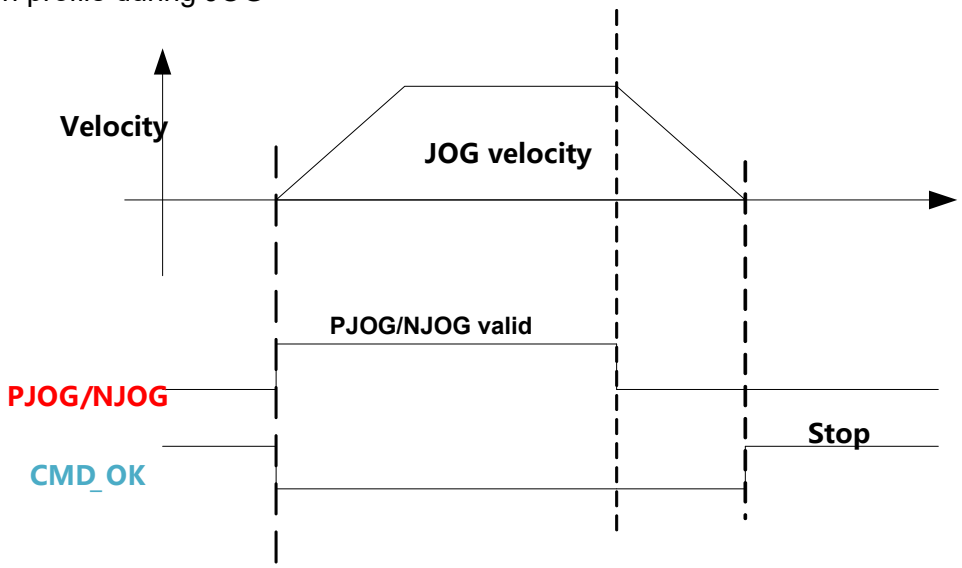

10.3.4 Path Motion


Path motion: Segmented, continuous, interrupted. Path positioning: Position, velocity, homing.
PR path is to a total of 16 paths. Every path can be set with motion type, positioning mode, velocity, acceleration, deceleration and pause time independently.

Parameter	Label	Description	485 addr.
P09.00	PR mode	Attribute of PR path is determined by its mode. Bit 0-3：type ： 0: null 1: Positioning 2: Velocity 3: Homing 4: Emergency stop *Indicates using P/V/H/S* Bit 4: 0: Can be Interrupted 1: Can't be Interrupted, indicates using! Bit 5: OVLP: 0: No overlap, indicates with SJ 1: Overlap, indicated with CJ Bit 6-7: 0: absolute 1: relative command 2: relative motor *Corresponding to ABS/INC/REL* Bit8-13： 0-15: Jump to corresponding path *Indicates using SJ0x or CJ0x* Bit 14： JUMP: 0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0X6200
P09.01	PR position H	High 16-bit of PR path position	0X6201
P09.02	PR position L	PR position（Only able to read low 16-bit using 485 communication）	0X6202
P09.03	Velocity	Velocity, rpm	0X6203
P09.04	Acceleration time	Unit ms/1000rpm	0X6204
P09.05	Deceleration time	Unit ms/1000rpm	0X6205
P09.06	Pause time	Pause time after command completed	0X6206
P09.07	Special parameter	Mapped to P08.02	0X6207
P09.08 ~ P09.127		8 parameters for each path. Please refer to Class 9 parameter in Chapter 5	

Path motion


Segmented trigger

CTRG rising edge/double edges trigger (P08.00) a segmented motion. Please refer to the sequence diagram below with rising edge trigger of path 5.

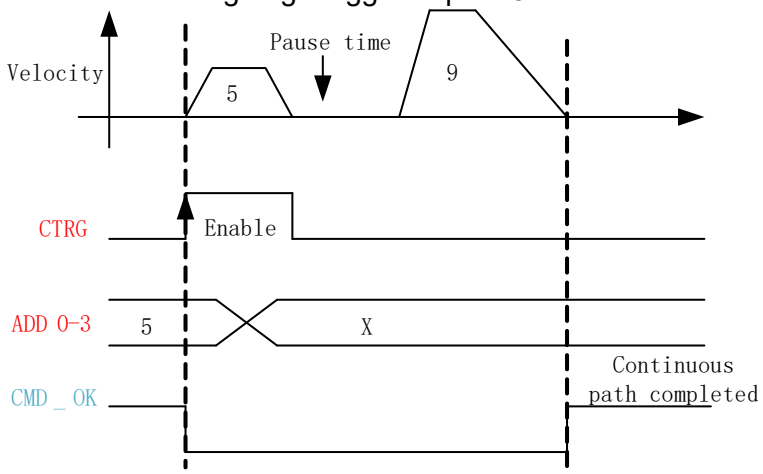


Multi-path interrupted motion

In multi-path motion, path motion that is triggered later will interrupt path motion that has already started. Please refer to the sequence diagram below

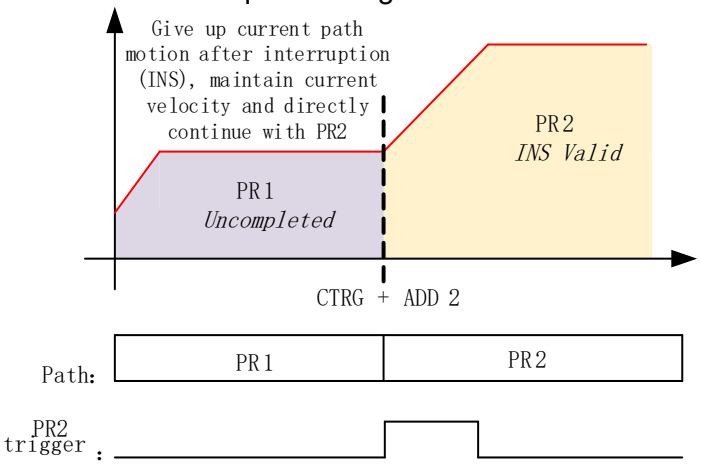


Non-overlap continuous motion

Path motion continues by another, no trigger needed for the next one to start.

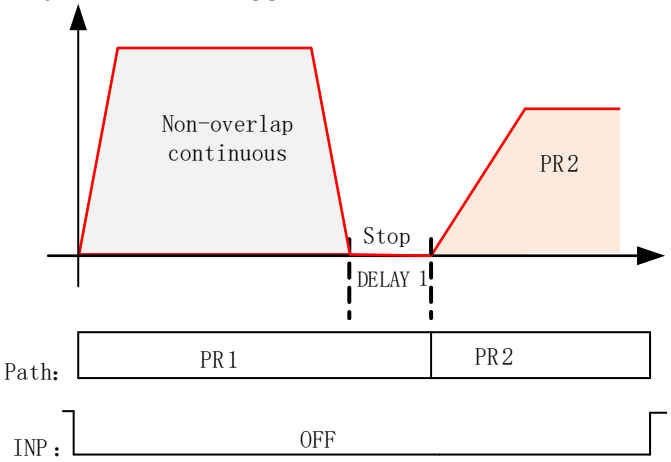

Overlapping continuous motion


Path motion starts immediately after the previous path motion is completed without deceleration or trigger in between.

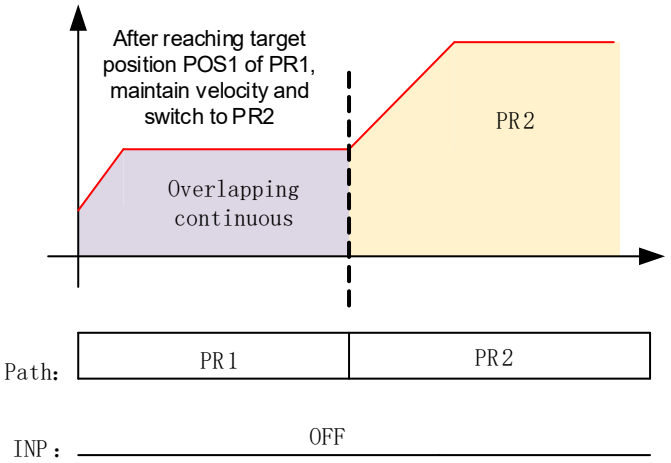


10.4 PR Control

10.4.1 PR Module in EDrive


Using Pr-Motion function in EDrive 2, PR parameters can be set including trigger settings, software position limit, JOG, homing, emergency stop, etc. Manual triggering of homing, path motion or emergency stop can also be triggered on this interface.

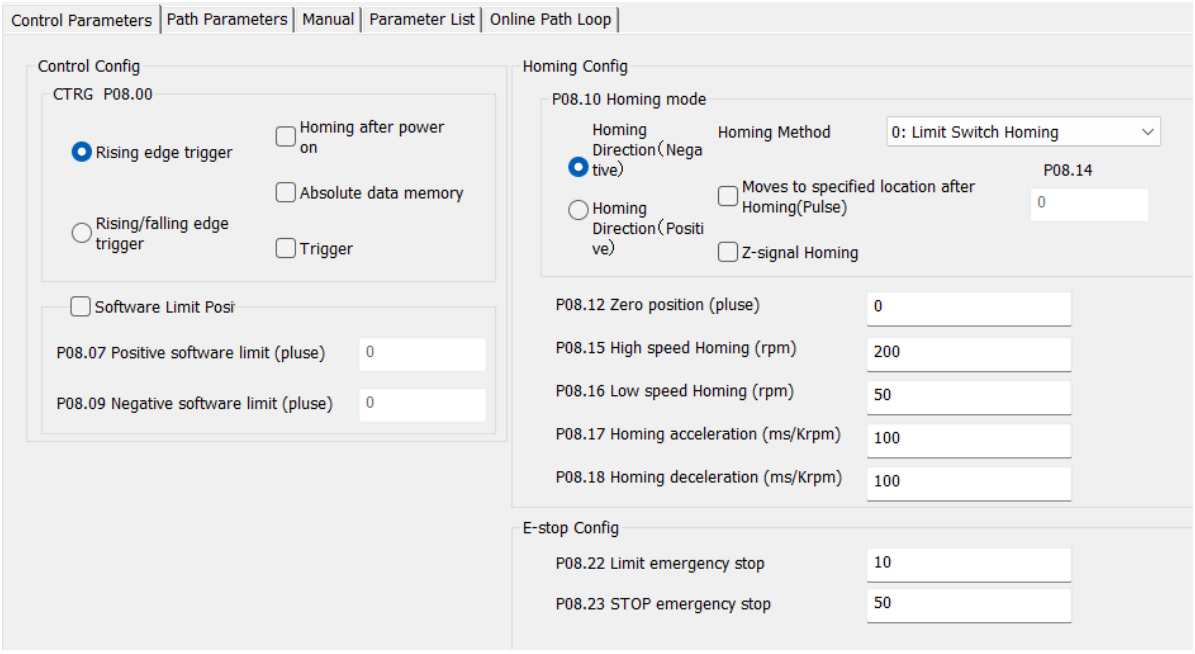


Most PR control related parameters can be set on this page.

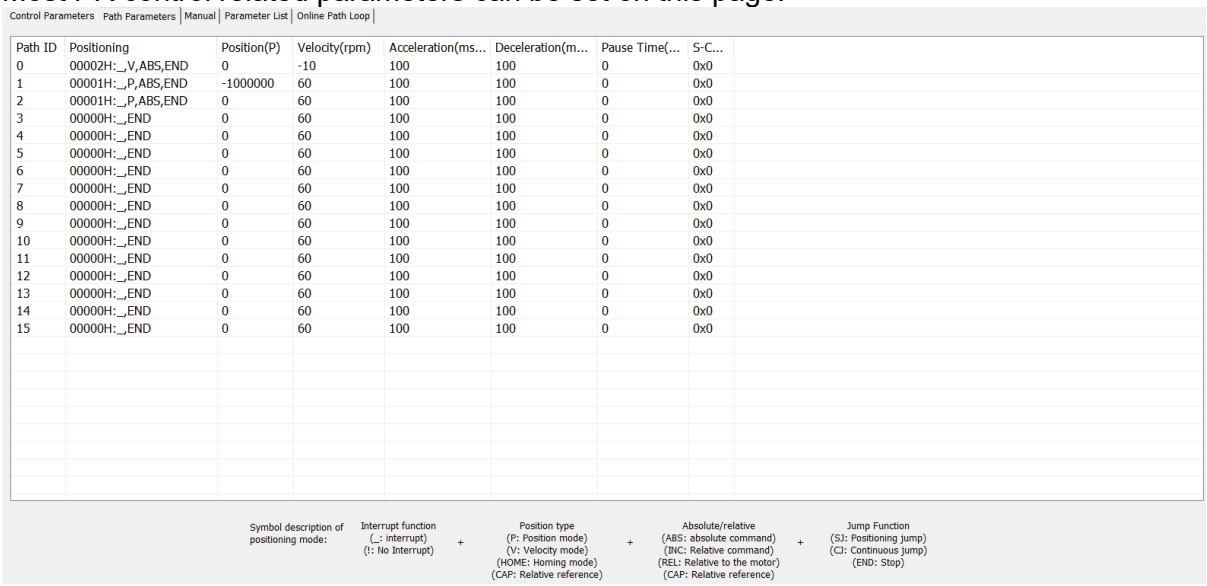

All class 9 parameters for 0-15 paths can be found here once connected to a servo driver that supports PR mode.

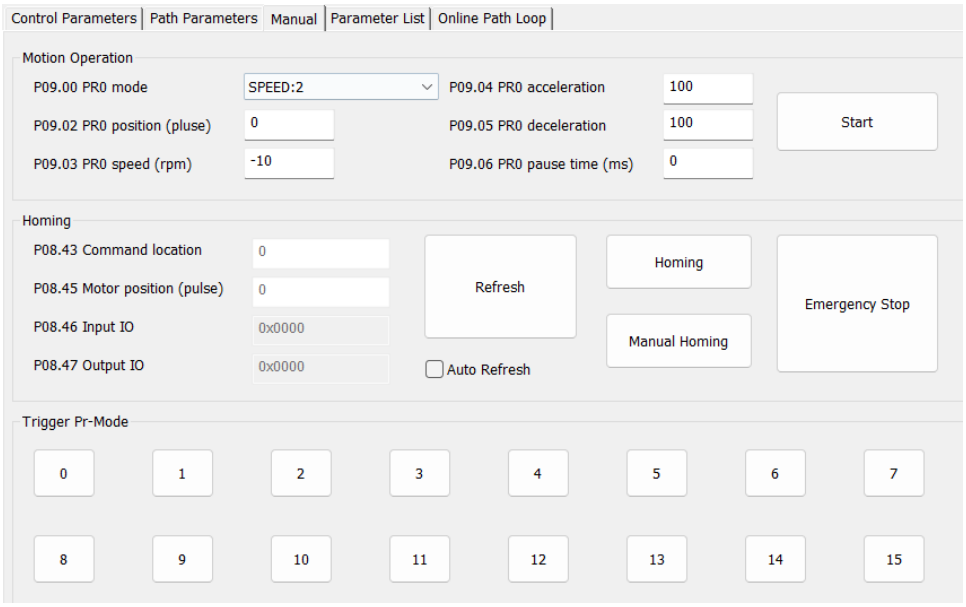


Manual control of servo driver in PR mode can be done in this page.

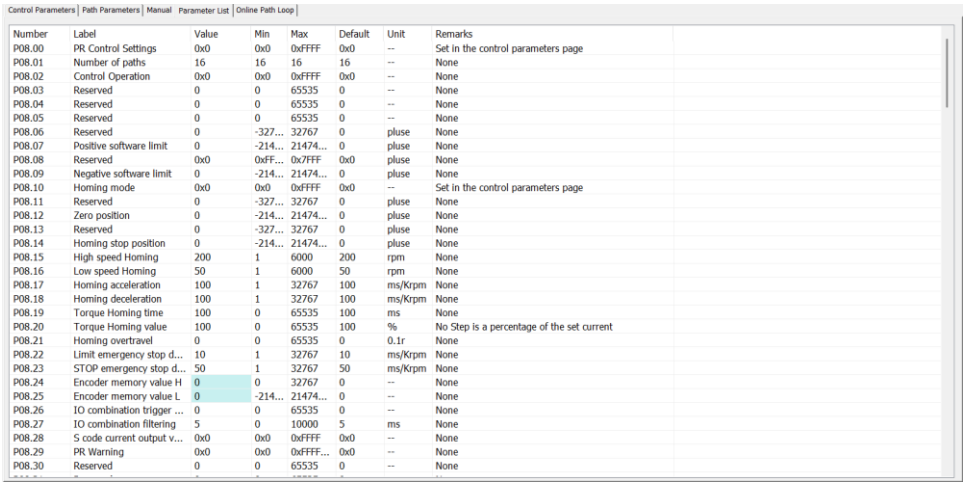

Number	Label	Value	Min	Max	Default	Unit	Remarks
P08.00	PR Control Settings	0x0	0x0	0xFFFF	0x0	--	Set in the control parameters page
P08.01	Number of paths	16	16	16	16	--	None
P08.02	Control Operation	0x0	0x0	0xFFFF	0x0	--	None
P08.03	Reserved	0	0	65535	0	--	None
P08.04	Reserved	0	0	65535	0	--	None
P08.05	Reserved	0	0	65535	0	--	None
P08.06	Reserved	0	-327...	32767	0	pluse	None
P08.07	Positive software limit	0	-214...	21474...	0	pluse	None
P08.08	Reserved	0x0	0xFF...	0x7FFF	0x0	pluse	None
P08.09	Negative software limit	0	-214...	21474...	0	pluse	None
P08.10	Homing mode	0x0	0x0	0xFFFF	0x0	--	Set in the control parameters page
P08.11	Reserved	0	-327...	32767	0	pluse	None
P08.12	Zero position	0	-214...	21474...	0	pluse	None
P08.13	Reserved	0	-327...	32767	0	pluse	None
P08.14	Homing stop position	0	-214...	21474...	0	pluse	None
P08.15	High speed Homing	200	1	6000	200	rpm	None
P08.16	Low speed Homing	50	1	6000	50	rpm	None
P08.17	Homing acceleration	100	1	32767	100	ms/Krpm	None
P08.18	Homing deceleration	100	1	32767	100	ms/Krpm	None
P08.19	Torque Homing time	100	0	65535	100	ms	None
P08.20	Torque Homing value	100	0	65535	100	%	No Step is a percentage of the set current
P08.21	Homing overtravel	0	0	65535	0	0.1r	None
P08.22	Limit emergency stop d...	10	1	32767	10	ms/Krpm	None
P08.23	STOP emergency stop d...	50	1	32767	50	ms/Krpm	None
P08.24	Encoder memory value H	0	0	32767	0	--	None
P08.25	Encoder memory value L	0	-214...	21474...	0	--	None
P08.26	IO combination trigger ...	0	0	65535	0	--	None
P08.27	IO combination filtering	5	0	10000	5	ms	None
P08.28	S code current output v...	0x0	0x0	0xFFFF	0x0	--	None
P08.29	PR Warning	0x0	0x0	0xFFFF...	0x0	--	None
P08.30	Reserved	0	0	65535	0	--	None

All PR mode and control parameters can be found on this list for convenience of tuning

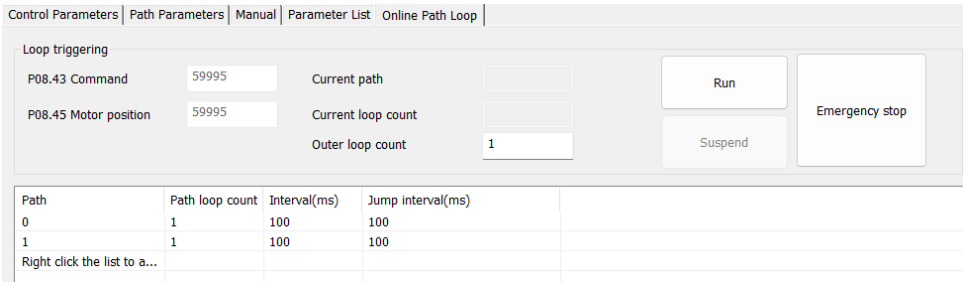

To run PR mode in a loop

10.4.2 Physical I/O


Path motion, feedback status, etc. can be triggered through I/O in PR mode. Please refer to the table below for I/O assignments in PR mode.

Input				Output			
Label	Signal	Value		Label	Signal	Value	
		NO	NC			NO	NC
Command trigger	CTRG	20h	A0h	Command completed	CMD_OK	20h	A0h
Homing	HOME	21h	A1h	Path completed	PR_OK	21h	A1h
Forced emergency stop	STP	22h	A2h	Homing completed	HOME_OK	22h	A2h
Positive JOG	PJOG	23h	A3h	S-code 0	SD0	23h	A3h
Negative JOG	NJOG	24h	A4h	S-code 1	SD1	24h	A4h
Positive position limit	PL	25h	A5h	S-code 2	SD2	25h	A5h
Negative position limit	NL	26h	A6h	S-code 3	SD3	26h	A6h
Origin	ORG	27h	A7h	S-code 4	SD4	27h	A7h
Path address 0	ADD0	28h	A8h	S-code 5	SD5	28h	A8h
Path address 1	ADD1	29h	A9h	S-code 6	SD6	29h	A9h
Path address 2	ADD2	2ah	AAh	PR warning	PRWAR	2Ah	AAh
Path address 3	ADD3	2bh	ABh				
Torque switching	TC-SEL	09h	89h				

S-code

S-code（Status code）is the S-code of currently operating PR positioning data.
Every PR path has a S-code setting.


S-code	Sx.H		Sx.L	
Bit	15	8-14	7	0-6
Description	S-code valid when completed. 0: Invalid, retain previous value 1: Valid	S-code upon completion	S-code valid upon activation 0: Invalid 1: Valid	S-code upon activation

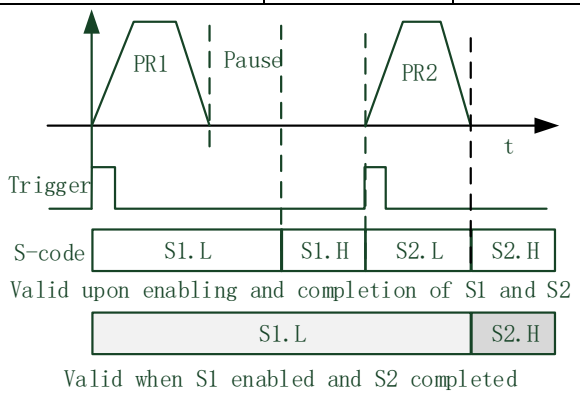

S-code bit	bit0/8	bit1/9	bit2/10	bit3/11	bit4/12	bit5/13	Bit6/14
SDx	SD0	SD1	SD2	SD3	SD4	SD5	SD6

I/O trigger

Path motion trigger: Edge trigger/combination trigger (P08.26). Edge trigger is triggering path combination motion using I/O. I/O combination trigger uses electrical level as trigger rather than signal edge. No valid motion for path 0 and I/O combination triggers motion once after I/O filter when converted to non-zero paths.

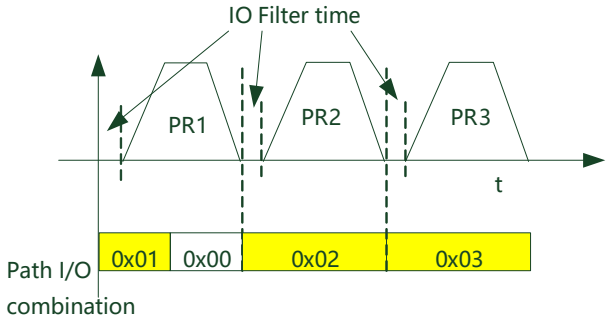

***Path combination 0 is invalid because I/O combination x>0->x can be triggered multiple times when using incremental position.*
**In I/O combination trigger mode 2, path motion will be triggered upon servo driver power on if I/O combination not set to 0. Please be careful.*

P08.26	Label	I/O combination trigger mode			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X601A

Value	Description
【0】	Disable I/O combination trigger mode. Use I/O CTRG signal edge trigger.
1	Enable I/O combination trigger. Valid when HOME-OK signal is valid.
2	Enable I/O combination trigger. HOME-OK signal not required.

IO combination trigger select path using ADD0~ADD3. Trigger mode is set in P08.26.

ADD3	ADD2	ADD1	ADD0	Path selection
OFF	OFF	OFF	OFF	Path 0 (Non-action)
OFF	OFF	OFF	ON	Path1
OFF	OFF	ON	OFF	Path2
OFF	OFF	ON	ON	Path3
OFF	ON	OFF	OFF	Path4
OFF	ON	OFF	ON	Path5
OFF	ON	ON	OFF	Path6
OFF	ON	ON	ON	Path7
ON	OFF	OFF	OFF	Path8
ON	OFF	OFF	ON	Path9
ON	OFF	ON	OFF	Path10
ON	OFF	ON	ON	Path11
ON	ON	OFF	OFF	Path12
ON	ON	OFF	ON	Path13
ON	ON	ON	OFF	Path14
ON	ON	ON	ON	Path15

10.4.3 485 Communication

485 communication can be used to achieve the same functions as with I/O, modifying PR related parameters and trigger path motions. Through this communication protocol, controlling multiple axes can be realized, saving wiring works with flexibility in the system. 485 communication includes 2 kinds of mode: Fixed trigger and immediate trigger.

485 communication parameters:

<table>
<tr><th>Parameter</th><th>Label</th><th>Description</th></tr>
<tr><td>P05.29</td><td>Communication mode</td><td>485 communication mode data
<table>
<tr><th>Value</th><th>Bit</th><th>Checksum</th><th>Stop</th></tr>
<tr><td>0</td><td>8</td><td>Even</td><td>2</td></tr>
<tr><td>1</td><td>8</td><td>Odd</td><td>2</td></tr>
<tr><td>2</td><td>8</td><td>Even</td><td>1</td></tr>
<tr><td>3</td><td>8</td><td>Odd</td><td>1</td></tr>
<tr><td>4</td><td>8</td><td>Null</td><td>1</td></tr>
<tr><td>【5】</td><td>8</td><td>Null</td><td>2</td></tr>
</table></td></tr>
<tr><td>P05.30</td><td>Baud rate</td><td>To set communication speed of RS485 communication
<table>
<tr><th>Value</th><th>Baud rate</th><th>Value</th><th>Baud rate</th></tr>
<tr><td>0</td><td>2400bps</td><td>【4】</td><td>38400bps</td></tr>
<tr><td>1</td><td>4800bps</td><td>5</td><td>57600bps</td></tr>
<tr><td>2</td><td>9600bps</td><td>6</td><td>115200bps</td></tr>
<tr><td>3</td><td>19200bps</td><td></td><td></td></tr>
</table></td></tr>
<tr><td>P05.31</td><td>ID</td><td>Modbus slave ID address</td></tr>
<tr><td>P08.02</td><td>PR trigger</td><td>
<table>
<tr><th>Attribute</th><th>Index</th><th>Description</th></tr>
<tr><td>Write</td><td>0x01P</td><td>N path positioning</td></tr>
<tr><td>Write</td><td>0x020</td><td>Reset</td></tr>
<tr><td>Write</td><td>0x021</td><td>Manually set currently position as 0 (Origin)</td></tr>
<tr><td>Write</td><td>0x040</td><td>Emergency stop</td></tr>
<tr><td>Read</td><td>0x000P</td><td>Positioning completed. Ready to receive new data</td></tr>
<tr><td>Read</td><td>0x01P,
0x020,
0x040</td><td>Yet to respond to command</td></tr>
<tr><td>Read</td><td>0x10P</td><td>Path motion undergoing</td></tr>
<tr><td>Read</td><td>0x200</td><td>Command completed. Waiting for positioning</td></tr>
</table></td></tr>
</table>

PR mode communication address:
Class 8 parameters: 0x6000+(Param-ID-800). For example, P08.06: 0x6000+(806-800) =0x6006
Class 9 parameters: 0x6200+(Param-ID-900). For example, P09.06: 0x6200+(906-900) =0x6206

10.4.4 Path Trigger

Fixed trigger

Fixed triggering method is to set all 16 paths homing and other settings, then through P08.02 (trigger register to replace CTRG and HOME) to enable path. Recommended for simple applications with fixed motions.

Steps:

1. Set homing and path attributes using EDrive. Power on driver for parameters to be valid.
2. Write corresponding command into 0x6002(P08.02) to realize required motions.

Attribute	Index	Description
Write	0x01P	*N* path positioning
Write	0x020	Reset
Write	0x021	Manually set currently position as 0 (Origin)
Write	0x040	Emergency stop
Read	0x000P	Positioning completed. Ready to receive new data
Read	0x01P, 0x020, 0x040	Yet to respond to command
Read	0x10P	Path motion undergoing
Read	0x200	Command completed. Waiting for positioning

Immediate trigger

Immediate trigger is more flexible while fixed triggering is restricted by 16 paths position. Path motion is triggered immediately once path is written. Motions such as position, velocity or homing are realized through data frame.

This triggering method uses PR0 with 8 data from which P09.07 mapped into P08.02. When 0x10 is written into P08.02, it will trigger PR0 motion immediately.

Steps:

1. Set homing and path attributes using EDrive. (Homing parameters must be set) Power on driver for parameters to be valid.
2. Control specific path using P08.02.
3. Realize path motion by writing into P09.00 – P09.07 with P09.07 = 0x10

Master device request frame byte data

No.	Data	Description	Value
1	ID	Slave ID	1~127
2	FC	Function code	0x10
3	ADDR	Address	0x62
4	ADDR	Address	0x00
5~6	NUM1	Data count（Word）	0x0008
7	NUM2	Data count（Byte）	0x10
8-9	P09.00	Mode	XXXX
10-11	P09.01	Position high bit	XXXX
12-13	P09.02	Position low bit	XXXX
14-15	P09.03	Velocity	XXXX
16-17	P09.04	Acceleration	XXXX
18-19	P09.05	Deceleration	XXXX
20-21	P09.06	Delay time	XXXX
22-23	P09.07	Trigger control	0x0010
24	CRC	Checksum Lo	
25		Checksum Hi	

Slave response frame byte data


No.	Data	Description	Value
1	ID	Slave ID	1~127
2	FC	Function code	0x10
3	ADDR	Address	0x62
4	ADDR	Address	0x00
5	NUM	Data count（Word）	0x08
6	CRC	Checksum Lo	0xXX
7		Checksum Hi	0xXX

-

10.5 PR motion

10.5.1 Trigger Using Physical I/O

1. Set up servo driver parameters such as P00.01 = 6. Required PR I/Os are set in P04.00-P04.15
2. Set up PR control parameters such as trigger, homing, emergency stop, velocity, etc. as shown below
3. Set PR path parameters such as motion type, S-code, etc. as shown below. The interface is divided into 3 parts：

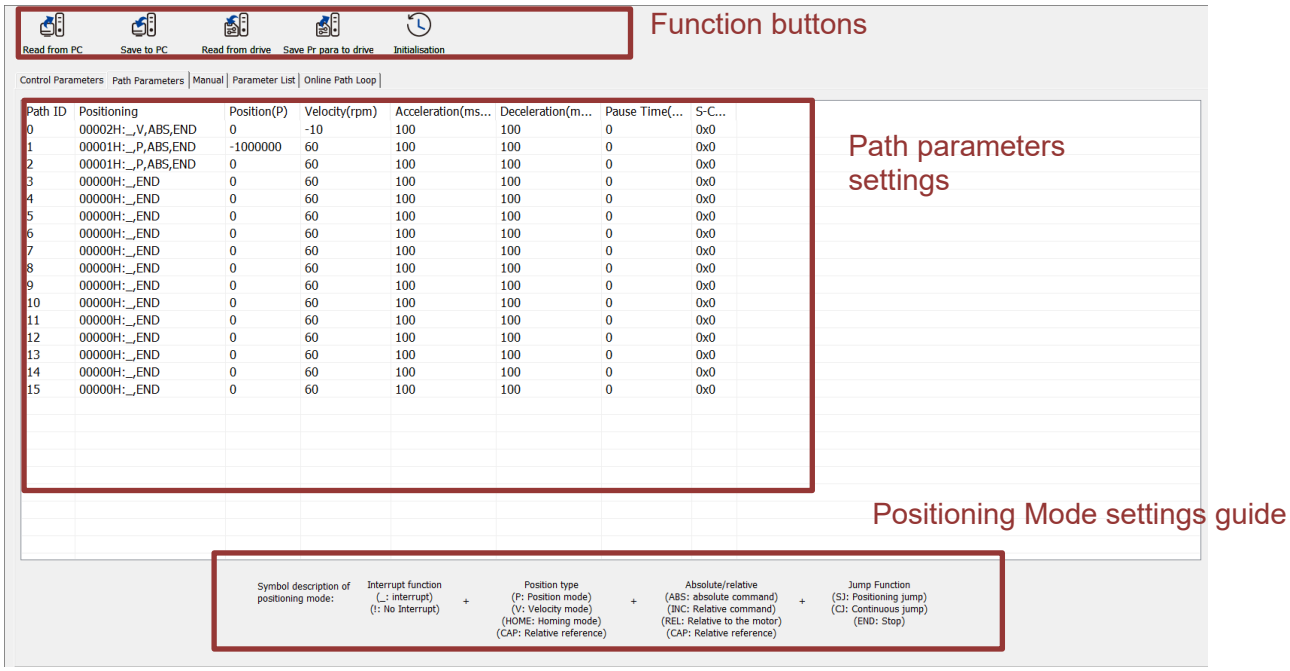


Function buttons: Upload, download parameters to/from drives, save parameter, backup and reset to factory default.



Parameters: Set PR path related parameters here
Descriptions: Short explanation on each PR path motion types
Remember to upload parameters to drive and save to drive after parameters setup.
4. Set up homing, trigger, I/O in PR mode as shown below:
***Please select required path when using edge trigger. Make sure the corresponding path is chosen in I/O path selection*

**Please set up I/O combination filter time when using I/O combination trigger. Make sure I/O signal filter time covers the change in signal level.*

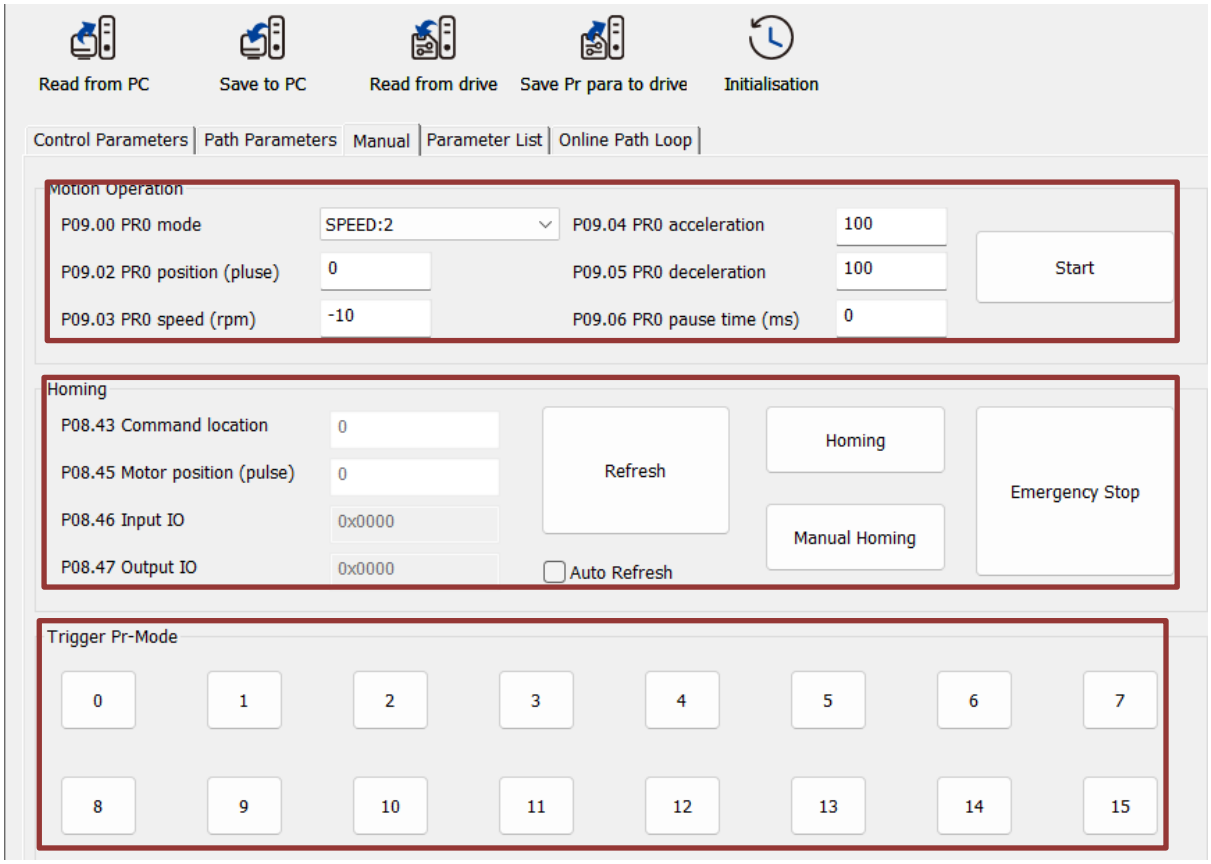

This page is divided into 3 parts:
Motion Operation: To set up parameters for Path 0. Click on “Start” and parameters will be automatically uploaded to driver
Homing: I/O and position display; Homing and emergency stop button
Trigger Pr-Mode: To trigger operation of any of the 16 PR paths.

10.5.2 Control Using 485 Communication

485 communication data frame format

Byte(x)	0	1	2	3	4	5	6	7
Definition	ID	Function code	Addr. High 8-bit	Addr. Low 8-bit	Data High 8-bit	Data Low 8-bit	CRC checksum Low 8-bit	CRC checksum High 8-bit

Please refer to Modbus communication in Chapter 7 to use Word function code writing. The request and respond frame data format is similar.

1. Set PR0 to travel to absolute position = 200000 (10000 pulse/rev)

No.	485 communication data frame	Description
1	01 06 62 00 00 01 57 B2	Set PR0 mode as absolute position
2	01 06 62 01 00 03 87 B3	Set PR0 position high bit
3	01 06 62 02 0D 40 32 D2	Set PR0 position low bit
4	01 06 62 03 02 58 66 E8	Set PR0 velocity
5	01 06 62 04 00 32 56 66	Set PR0 acceleration
6	01 06 62 05 00 32 07 A6	Set PR0 deceleration
7	01 06 60 02 00 10 37 C6	Trigger PR0 motion
8	01 06 60 02 00 40 37 FA	Send Emergency stop datagram when required

2. Set PR0 to travel relative distance = 10000 (10000 pulse/rev)

No.	485 communication data frame	Description
1	01 06 62 00 00 41 56 42	Set PR0 mode as relative position
2	01 06 62 01 00 00 C7 B2	Set PR0 position high bit
3	01 06 62 02 27 10 2D 8E	Set PR0 position low bit
4	01 06 62 03 02 58 66 E8	Set PR0 velocity
5	01 06 62 04 00 32 56 66	Set PR0 acceleration
6	01 06 62 05 00 32 07 A6	Set PR0 deceleration
7	01 06 60 02 00 10 37 C6	Trigger PR0 motion
8	01 06 60 02 00 40 37 FA	Send Emergency stop datagram when required

3. Set PR0 as velocity mode with velocity = 600rpm

No.	485 communication data frame	Description
1	01 06 62 00 00 02 17 B3	Set PR0 as velocity mode
2	01 06 62 03 02 58 66 E8	Set PR0 velocity
3	01 06 62 04 00 32 56 66	Set PR0 acceleration
4	01 06 62 05 00 32 07 A6	Set PR0 deceleration
5	01 06 60 02 00 10 37 C6	Trigger PR0 motion
6	01 06 60 02 00 40 37 FA	Send Emergency stop datagram when required

4. Set PR1 to travel to absolute position = 200000 (10000 pulse/rev)

No.	485 communication data frame	Description
1	01 06 62 08 00 01 D6 70	Set PR1 mode
2	01 06 62 09 FF FC 07 C1	Set PR1 position high bit
3	01 06 62 0A F2 C0 F3 40	Set PR1 position low bit
4	01 06 62 0B 02 58 E7 2A	Set PR1 velocity
5	01 06 62 0C 00 32 D7 A4	Set PR1 acceleration
6	01 06 62 0D 00 32 86 64	Set PR1 deceleration
7	01 06 60 02 00 11 F6 06	Trigger PR1 motion
8	01 06 60 02 00 40 37 FA	Send Emergency stop datagram when required

5. Set PR1 as velocity mode with velocity = 300rpm

No.	485 communication data frame	Description
1	01 06 62 08 00 02 96 71	Set PR1 as velocity mode
2	01 06 62 0B 01 2C E7 FD	Set PR1 velocity
3	01 06 60 02 00 11 F6 06	Set PR1 acceleration
4	01 06 62 0C 00 32 D7 A4	Set PR1 deceleration
5	01 06 62 0D 00 32 86 64	Trigger PR1 motion
6	01 06 60 02 00 40 37 FA	Send Emergency stop datagram when required

6. Homing

No.	485 communication data frame	Description
1	01 06 60 0A 00 00 B7 C8	Set homing method
2	01 06 60 0F 00 64 A6 22	Set high homing velocity
3	01 06 60 10 00 1E 16 07	Set low homing velocity
4	01 06 60 02 00 20 37 D2	Trigger homing
5	01 06 60 02 00 40 37 FA	Send Emergency stop datagram when required

Chapter 11 Special Functions

11.1 Multi-turn Absolute Encoder

Multiturn absolute encoder records the position, and the revolution counts of the motor. When driver is powered-off, multiturn absolute encoder will back up the data using battery and after powering on, the data will be used to calculated absolute mechanical position and there is no need for a mechanical homing process. Use widely in robotic arms and CNC machines.
If it is the first time using the encoder, please home the mechanical axis and initialize the absolute position of the encoder to zero. Set up a homing point and only home when there is an alarm. Please stop the axis before reading any position data to prevent inaccuracy.

11.1.1 Parameters Setting

P00.15	Label	Absolute encoder settings			Valid mode(s)	P	S	T
	Range	0~15	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x001F		
	Valid	After restart						


Value	Mode	Description
【0】	Incremental	Doesn't retain position data on power off. Unlimited travel distance.
1	Multiturn absolute linear	Retrain position data on power off. For applications with fixed travel distance and no multiturn data overflow.
2	Multiturn absolute rotary	Retrain position data on power off. Actual data feedback in between 0-(P06.63+1). Unlimited travel distance.
3	Single turn absolute	Used when travel distance is within 1 revolution of the encoder. Data overflow will trigger alarm.
5	Multi turn absolute	Clear multiturn alarm and activate multiturn absolute function. Will switch to multiturn mode once alarm cleared, if remains at 5 after 3s, please solve according to Er153.
9		Clear multiturn position, reset multiturn alarm and activate multiturn absolute function. Will switch to multiturn mode once alarm cleared, if remains at 9 after 3s, please solve according to Er153. Please disable axis before setting to 9 and home the axis before using.
Others		Do not use!

P06.63 *	Label	Absolute Multi-turn Data Upper Limit			Valid mode(s)	P	S	T
	Range	0~32766	Unit	Turn	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x067F		
	Valid	Power Cycle						

Sets the upper limit for absolute multi-turn data.
Applicable when P00.15 = 2 (multi-turn mode). In this case, feedback position cycles between 0 and (P06.63 + 1) × encoder resolution.
If the multi-turn data exceeds this limit, the value resets to 0.

11.1.2 Read Absolute Position


1. Steps：
   1) First, select a motor with multiturn absolute encoder, install battery and confirm whether the driver version supports the specific motor;
   2) Set P00.15 = 1. If it is the first time installation, Err153 will occur because battery is newly installed and position data is invalid. Please home the axis and initialize the absolute position of the encoder to zero.
   3) When absolute homing point is set and there is no fault with the battery, the alarm will be cleared
   4) Finally, the user can read the absolute position. Position won't be lost even if the driver is powered off.

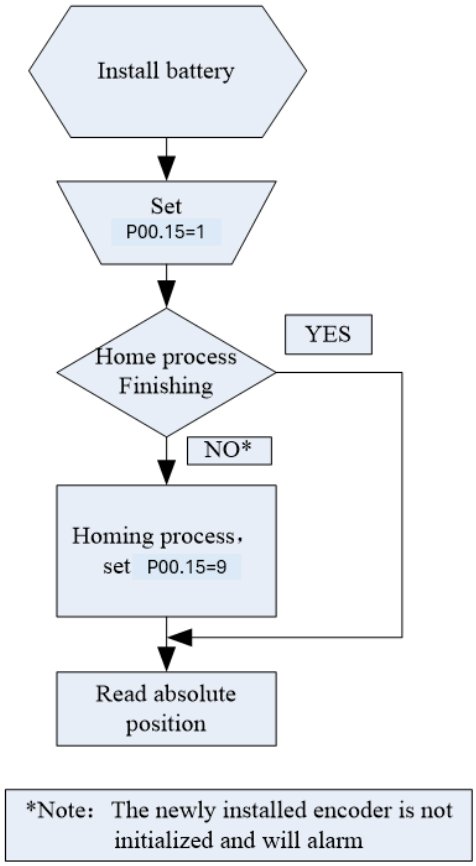

2. Read absolute position

When the rotor turns in clockwise direction, the revolution count will be negative; turns in counterclockwise direction, the count will be positive. No. of revolutions will be from -32767 to +32767. If the count number reaches +32767 in counterclockwise direction, the count will revert back to -32768, -32767 and vice versa for clockwise direction.

As for position data, it depends on the precision of the encoder. For 17 bit = 0-131071, 23 bit = 0-8388607

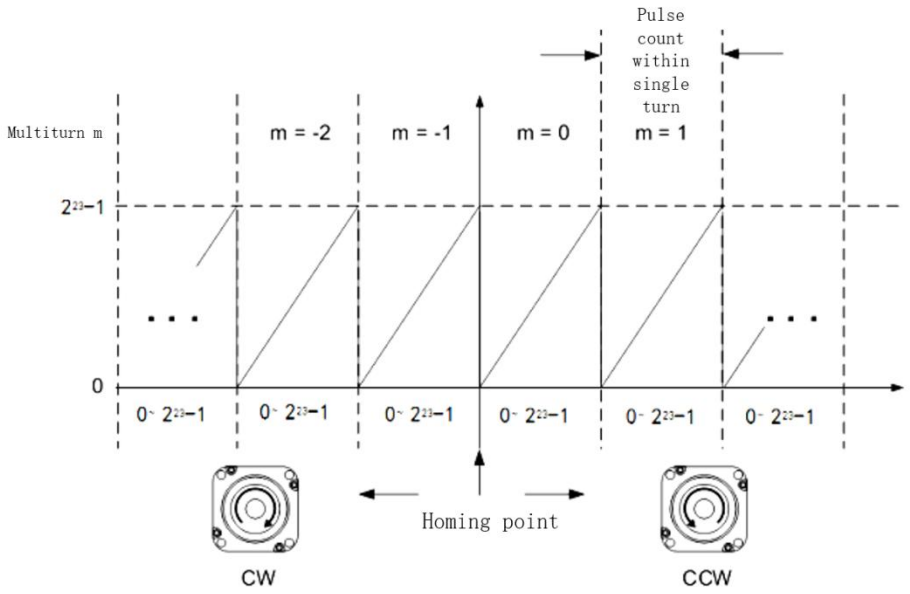

Read data from 485 address object dictionary

Please read data only when the motor is fully stopped or it might cause calculation errors. Please repeat this step at least twice to make sure the result is uniform.


Multiturn linear mode(P00.15 = 1)

Multiturn absolute with memory of position at power off. Use this mode when travel distance is constant, encoder multiturn data would not overflow.

In this mode, encoder data ranges from -32768~32767. If the value either of the limits, Er157 might occur. Set 9 in P00.15 to clear multiturn data and home the axis.

Multiturn rotational mode

For absolute encoder, multiturn rotational mode (P00.15 = 2, P06.63 set to multiturn upper limit) is added on top of incremental mode and multiturn linear mode. Actual feedback multiturn data is always between 0 – [P06.63 + 1], regardless of the direction of rotation. There is no limit to no. of rotation and no data overflow.

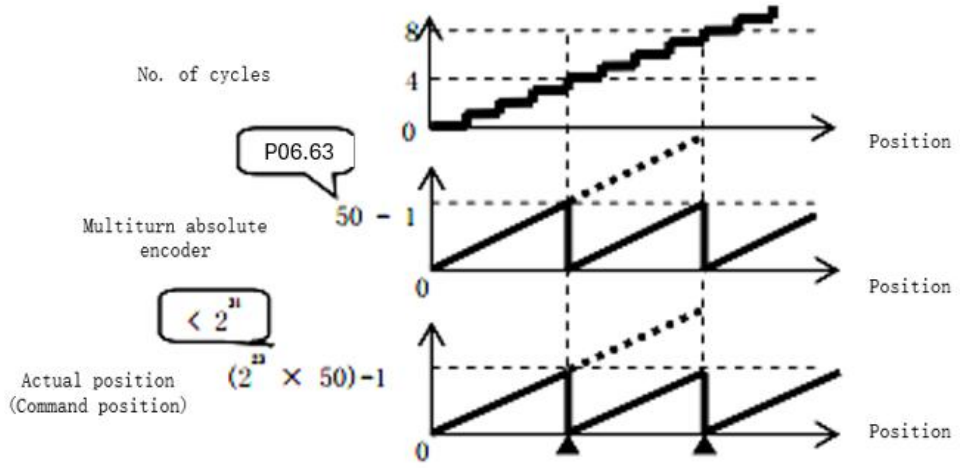

Single turn absolute mode

Use this mode when the travel distance of the axis is within a single turn of the rotor.


1. Target position input range – EtherCAT

When using 23-bit absolute encoder, under single turn absolute mode, electronic gear ratio =1:1


Homing point offset 607Ch = 0, target position range = 0 – [2^{23}-1]

Axis is homed, target position range = 607Ch – [2^{23}-1+607Ch]

When electronic gear ratio = 1:1, 607Ch = 0:

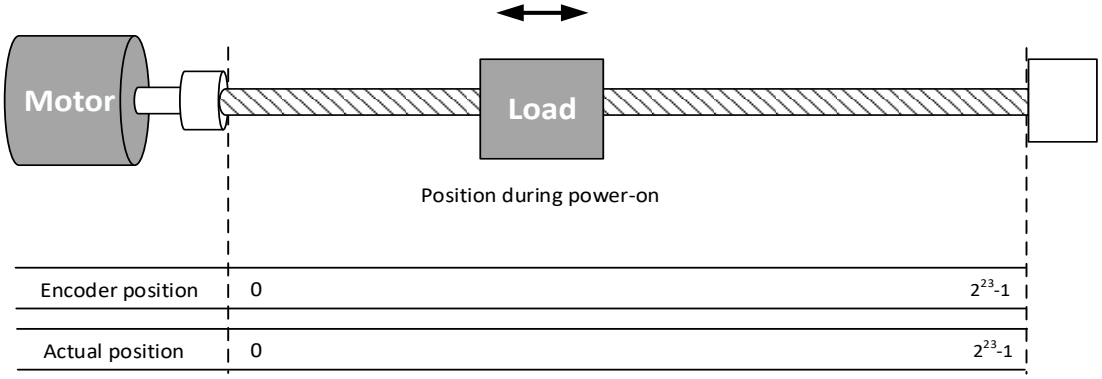

When electronic gear ratio = 1:1, 607Ch = 10000:

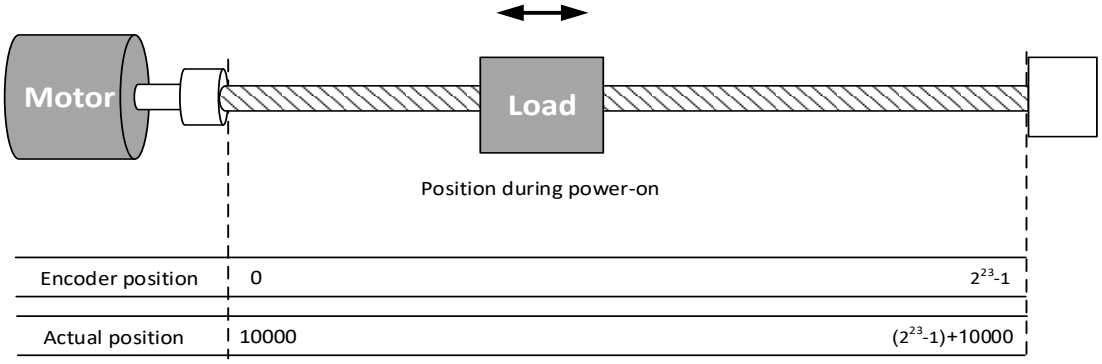

2. Clear multiturn position


Before clearing multiturn position, axis needs to be homed. After clearing multiturn position, revolution count = 0 but absolute position remains unchanged and Err153 alarm will be cleared.

Please make sure the homing point is within the range of 1 revolution of the rotor. Installation and setup of the homing point can be set with the use of auxiliary function D21 on the front panel.


By setting P00.15 to 9, multiturn position will be cleared.

Please take notice of motor position during power on. Range of motion of a motor depends on the position of the motor during power on (23-bit absolute encoder as example).

If the motor position is as shown below during power on. The range of motion of the motor is within the range of a single turn of the motor from motor position during power on.

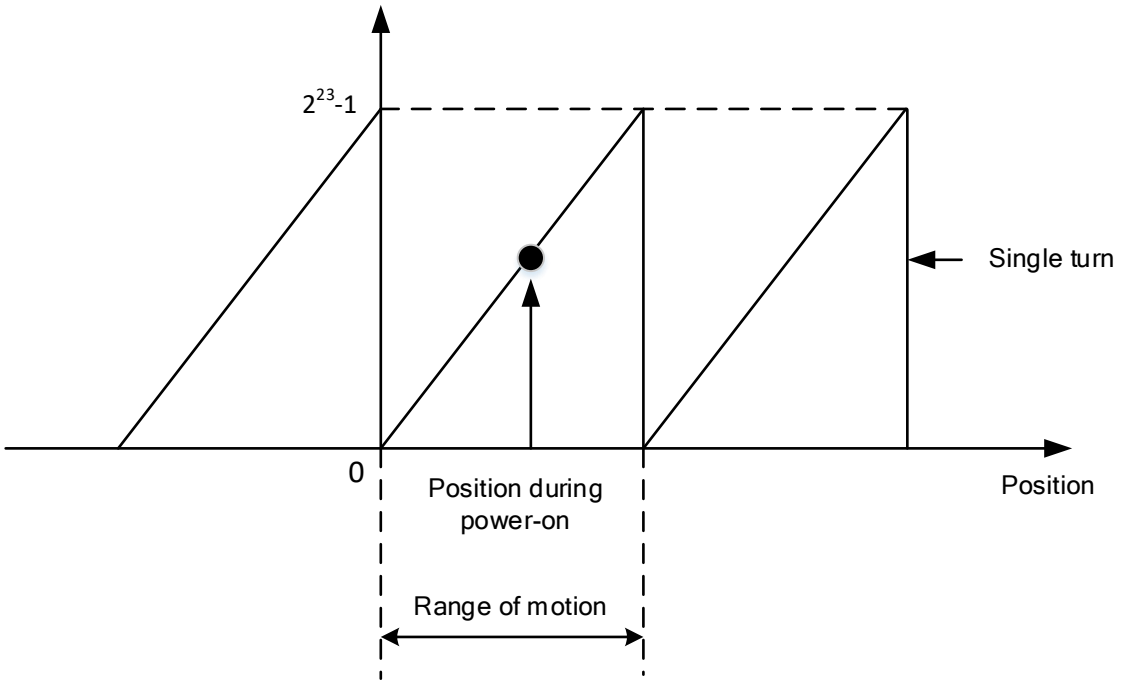

If power is turned off at position as shown below and power on when motor reaches the position below. Motor range of motion changes as shown below.

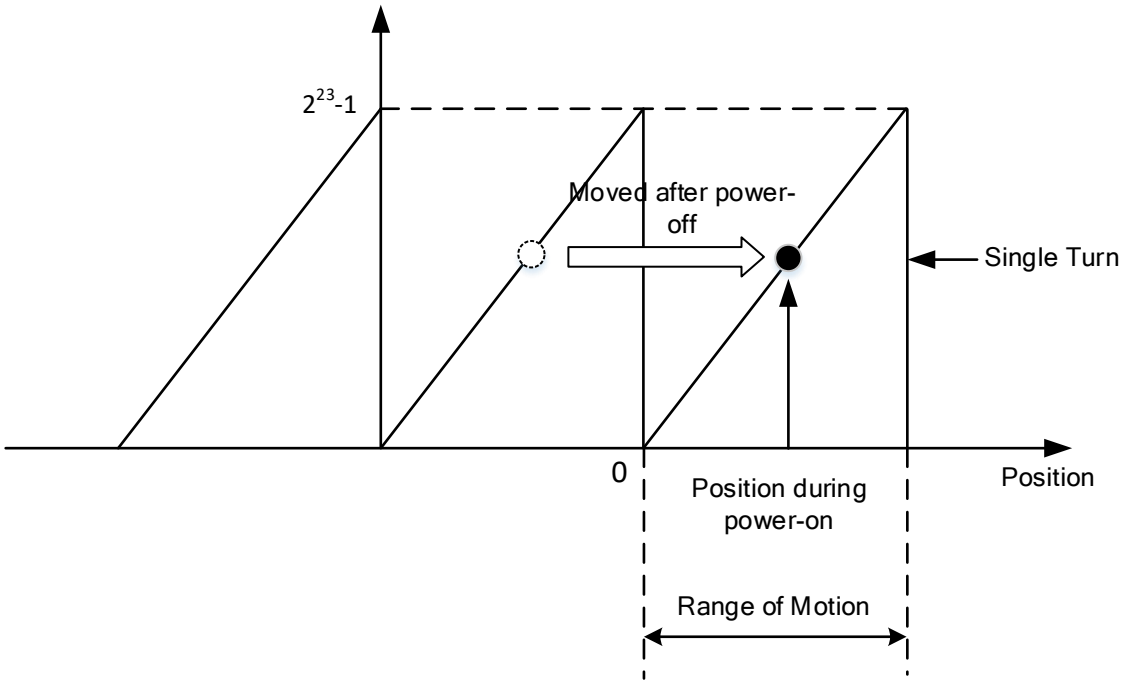

11.1.3 Absolute Encoder Related Alarm


The alarm can determine if absolute value encoder is valid. If battery power is low, not a motor with absolute encoder, encoder error etc. occurs, user can find out about the error from alarm output or on the front panel. Controller will stop any operation until alarm is cleared.

Alarm output:
Err153 will be shown on front panel or by I/O ALM signal and from controller.

Err153 might occur,

1) If absolute encoder is used for the first time and due to installation of new batteries Axis needs to be homed and multiturn data needs to be cleared.
2) If battery voltage is lower than 3.2v. Replace battery and restart the motor.
3) If battery voltage is lower than 2.5v or battery power was cut off. Replacing the battery won't clear the alarm. Axis needs to be homed, and multiturn data needs to be cleared.

Alarm processing flow chart

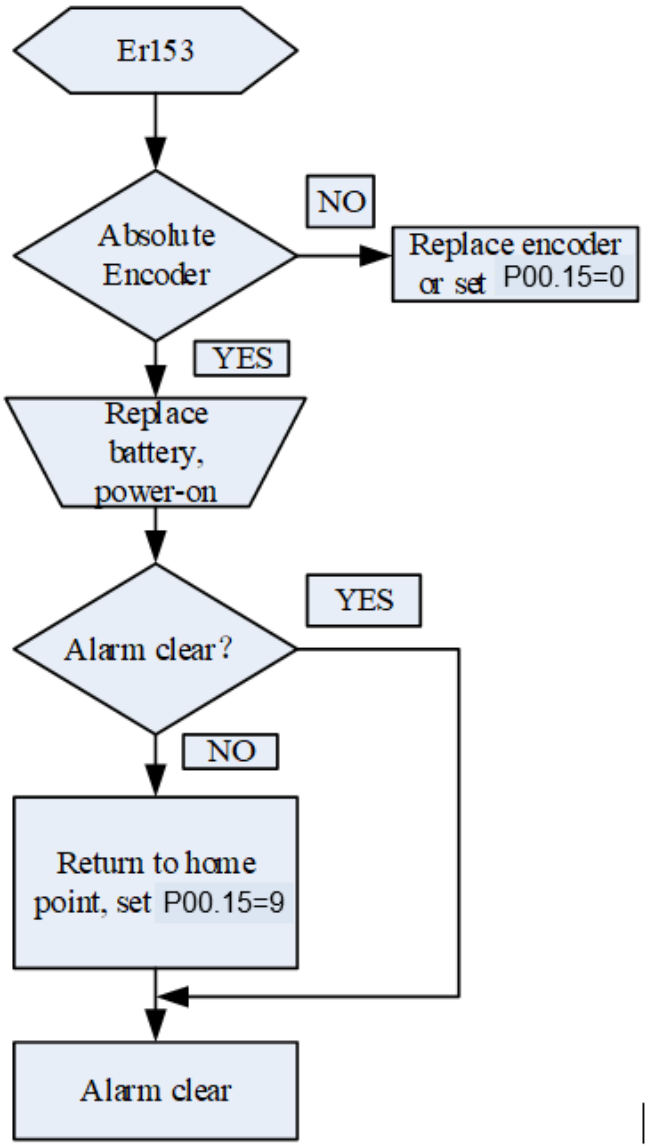

11.1.4 Battery kit

In multiturn absolute mode, Er153 might occur upon first time installation. P00.15 needs to be set to 0 to reset error and clear multiturn data.
When battery supply voltage < 3.0V, ArA03 might occur. Change battery as per steps below:

1. Power on driver (Make sure axis is disabled)
2. Change battery
3. Servo driver will reset warning automatically.

11.2 Safety Feature

11.2.1 Max. Motor Rotational Speed Limitation

Motor rotational speed limits can be set on P03.24. If command speed is 1500r/min, but P03.24 is set to 1000r/min, motor rotational speed will only go up to 1000r/min.
Motor overspeed threshold value can be set in P05.13, if the rotational speed is exceeded during operation, Er1A0 might occur.

P03.24	Label	Maximum motor rotational speed			Valid mode(s)	P	S	T
	Range	0~10000	Unit	r/min	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0331		
	Valid	Immediate						
To set maximum motor rotational speed but not higher than motor rated speed If P03.24 = 0, maximum motor rotational speed = max. speed in motor parameter.								

P05.13	Label	Overspeed level settings			Valid mode(s)	P	S	T
	Range	0~10000	Unit	r/min	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x051B		
	Valid	Immediate						
If motor speed exceeds P05.13, Er1A0 might occur. When P05.13 = 0, overspeed level = max. motor speed x 1.2								

11.2.2 Emergency Stop Function

Emergency stop is used when an alarm occurs or a servo prohibition signal is received when servo driver is enabled.

Method 1: Set up P04.43 to enable the function

P04.43	Label	Emergency stop function			Valid mode(s)	P	S	T
	Range	0~1	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0457		
	Valid	Immediate						

Value	Description.
【0】	Emergency stop is valid, servo driver will be forced to STOP and Err570 occurs.
1	Emergency stop is invalid, servo driver will not be forced to STOP. Servo can be enabled once E-STOP signal is cleared.

P05.04	Label	Driver prohibition input settings			Valid mode(s)	P	S	T
	Range	0/1/2	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0509		
	Valid	Immediate						

To set driver prohibition input (POT/NOT)

Value	Description
0	POT → Positive direction drive prohibited NOT → Negative direction drive prohibited
1	POT and NOT invalid
2	Any single sided input from POT or NOT might cause Er260

Method 2: Using 605Ah object dictionary through master device to activate this function.

P05.11	Label	Servo braking torque setting			Valid mode(s)	P	S	T
	Range	0~500	Unit	%	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0517		
	Valid	Immediate						

To set torque limit for servo braking mode.
If P05.11 = 0, use torque limit as under normal situation.
Please note that if P05.11 set value is too low, emergency stop will take longer.

11.2.3 Servo Stopping Mode

P05.06	Label	Servo-off mode			Valid mode(s)	P	S	T
	Range	0~1	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x050D		
	Valid	Immediate						

To set servo driver disable mode and status.

Value	Description	
	Mode	*Status*
0	Servo braking	Dynamic braking
1	Free stopping	Dynamic braking
2	Dynamic braking	Dynamic braking
3	Servo braking	Free-run
4	Free stopping	Free-run
5	Dynamic braking	Free-run

Servo braking: Stop servo axis quickly using braking torque
P05.06 only effective for stopping under normal circumstances. For stopping on alarm occurrence but refer to P05.10

P05.10	Label	Servo-off due to alarm mode			Valid mode(s)	P	S	T
	Range	0~2	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0515		
	Valid	After restart						

To set servo driver disable mode and status if alarm is triggered.
Alarm type 2:

Value	Explanation	
	Mode	*Status*
0	Servo braking	Dynamic braking
1	Free stopping	Dynamic braking
2	Dynamic braking	Dynamic braking
3	Servo braking	Free-run
4	Free stopping	Free-run
5	Dynamic braking	Free-run

Alarm type 1:

Value	Explanation	
	Mode	*Status*
0	Dynamic braking	Dynamic braking
1		
2		
3	Servo braking	Free-run
4	Free stopping	Free-run
5	Dynamic braking	Free-run

11.2.4 Max. Duration for Motor to Stop After Disabling

Set max time duration for motor to stop after disabling. If the time taken for motor to stop exceeds the duration set in P06.14 and motor speed is still higher than P04.39, holding brake will be activated. If motor doesn't have holding brake, dynamic braking will be activated to force stop the motor.

P06.14	Label	Max. time to stop after disabling			Valid mode(s)	P	S	T
	Range	0~1000	Unit	ms	Default	500		
	Byte length	16bit	Attribute	R/W	485 address	0x061D		
	Valid	Immediate						

To set the max. time allowed for the axis to stop at the emergency stop or normal axis disabling.
After disabling axis, if motor speed is still higher than P04.39 but the time set in P06.14 is reached, BRK_ON given and holding brake activated.
BRK_ON given time is determined by P06.14 or when motor speed goes below P04.39, whichever comes first.

Applications:
1. After disabling axis, if motor speed is still higher than P04.39 but the time set in P06.14 is reached, BRK_ON given and holding brake activated.
2. After disabling axis, if motor speed is already lower than P04.39 but the time set in P06.14 is not yet reached, BRK_ON given and holding brake activated.

Dynamic brake will be providing the braking function if the function is activated for motors without holding brake.

11.2.5 External Brake Deactivation Output Signal BRK-OFF


Please refer to P04.11 to set up the I/O output function parameters. When enabled and timing conditions are fulfilled, the set I/O output will deliver ON signal.

P04.37	Label	Motor power-off delay time			Valid mode(s)	P	S	T
	Range	0~3000	Unit	1ms	Default	150		
	Byte length	16bit	Attribute	R/W	485 address	0x044B		
	Valid	Immediate						

To set delay time for holding brake to be activated after motor power off to prevent axis from sliding.
When P05.06 = 0, SRV-ON signal is off, holding brake is activated (delay time is determined by P04.39 or P06.14). Motor powered-off once delay time set in P04.37 is due.

P04.38	Label	Holding brake release time			Valid mode(s)	P	S	T
	Range	0~3000	Unit	1ms	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x044D		
	Valid	Immediate						

To set delay time for holding brake to be released after motor power on. Motor will remain at current position, and input command is masked to allow holding brake to be fully released before motor is set in motion.

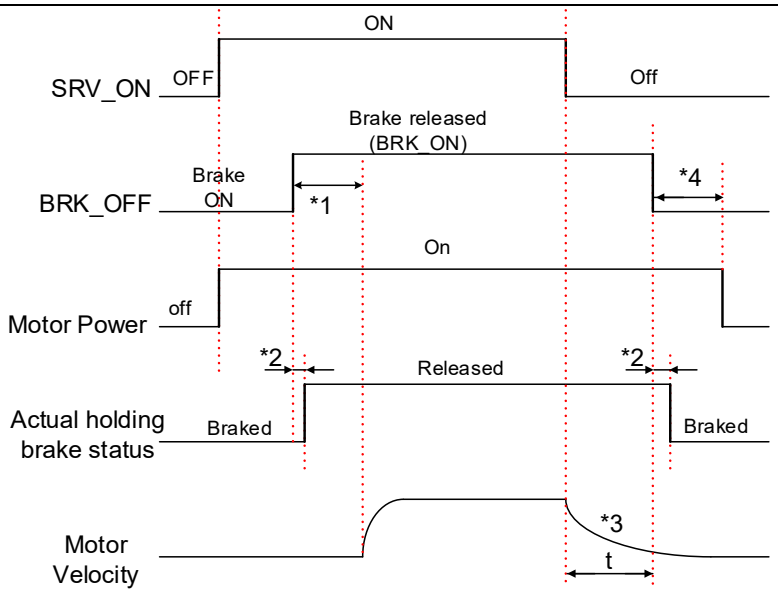

*1: Delay time set in P04.38
*2: Delay time from the moment BRK_OFF signal is given until actual holding brake is released or BRK_ON signal is given until actual holding brake is activated. It is dependent on the holding brake of the motor.
*3: Deceleration time is determined by P06.14 or if motor speed goes below P04.39, whichever comes first. BRK_OFF given after deceleration time.
*4: P04.37 set time value.

Delay time from the moment SRV_ON is given until BRK_OFF switch to BRK_ON, is less than 500ms.

P04.39	**Label**	Holding brake activation speed			**Valid mode(s)**	**P**	**S**	**T**
	Range	30~3000	**Unit**	r/min	**Default**	30		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x044F		
	Valid	Immediate						

To set the activation speed for which holding brake will be activated.

When SRV-OFF signal is given, motor decelerates, after it reaches below P04.39 and P06.14 is not yet reached, BRK_OFF is given.
BRK_OFF signal is determined by P06.14 or if motor speed goes below P04.39, whichever comes first.

Application:
1. After disabling axis, P06.14 has been reached but motor speed is still above P04.39, BRK_OFF signal given.
2. After disabling axis, P06.14 has not been reached but motor speed is below P04.39, BRK_OFF signal given.

Deceleration max duration: 2s. Servo disabled after 2s.

11.3 Position Comparison

Position comparison is achieved by using instantaneous position data in comparison with preset position in position parameters. When the condition(s) is fulfilled, a pulse width configurable DO signal or ABZ/OCZ signal through frequency divider will be delivered. This function is operated in CPLD, without communication delay between processors hence it is suitable for application where high velocity motion is required.

Position comparison		Description
Output trigger	Output	6 DO or frequency divider ABZ/OCZ signal
	Logic	DO output valid as set in P04.10-P04.15
		ABZ/OCZ output valid as set in P05.42
		Output mode：Pulse / Flip
	Pulse width	P05.72 set pulse width
	Delay compensation	PA5.72 compensate for hardware delay
Comparison source	Motor enclosed	Supported
	Closed loop ABZ encoder	Supported
Comparison value	Points of comparison	42 points
Comparison attribute	Comparison method	Comparison ON/OFF for positive/negative crossover
		Set comparison output

Please assign DO as CMP-OUT or ABZ-signal as position comparison output.

Related parameters

P0C.00	**Label**	Enable position comparison			**Valid mode(s)**	**P**	
	Range	0~1	**Unit**	—	**Default**	0	
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x2C01	
	Valid	Immediate					

Value	Description
【0】	Disable
1	Enable （Rising edge）

P0C.01	**Label**	Position comparison mode			**Valid mode(s)**	**P**	
	Range	0~1	**Unit**	—	**Default**	0	
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x2C03	
	Valid	Immediate					

Value	Description
【0】	Single comparison
1	N cycles comparison

P0C.02	**Label**	Position comparison pulse output bandwidth			**Valid mode(s)**	**P**	
	Range	1~4095	**Unit**	0.1ms	**Default**	0	
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x2C05	
	Valid	Immediate					
To set output signal pulse width of position comparison.							

P0C.03	**Label**	Position comparison output delay offset			**Valid mode(s)**	**P**		
	Range	-10000~10000	**Unit**	0.1 μs	**Default**	0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x2C07		
	Valid	Immediate						
	To set delay time compensation for delay due to DO/ frequency divider							
P0C.04	**Label**	Position comparison starting point			**Valid mode(s)**	**P**		
	Range	1~42	**Unit**	-	**Default**	1		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x2C09		
	Valid	Immediate						
	To set the starting point of position comparison.							
P0C.05	**Label**	Position comparison end point			**Valid mode(s)**	**P**		
	Range	1~42	**Unit**	-	**Default**	2		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x2C0B		
	Valid	Immediate						
	To set the end point of position comparison.							
P05.06	**Label**	No. of cycles for *N* cycle comparison			**Valid mode(s)**	**P**		
	Range	1~50000	**Unit**	-	**Default**	1		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x2C0D		
	Valid	Immediate						
	To set the number of cycles for *N* cycles comparison in position comparison.							
P05.07	**Label**	Position comparison – Set current position as origin			**Valid mode(s)**	**P**		
	Range	1~50000	**Unit**	-	**Default**	1		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x2C0F		
	Valid	Immediate						

Set origin for position comparison, set current position as origin at rising edge.

Value	Description
【0】	Disable
1	Enable （Rising edge）

P05.08	**Label**	Position comparison - offset to origin			**Valid mode(s)**	**P**		
	Range	1~50000	**Unit**	-	**Default**	1		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x2C11		
	Valid	Immediate						
	To set offset value of position in comparison to origin set in P05.77							

To set target position and its attributes for position comparison.

P0C.20~P0C.61	**Label**	Position comparison 1~42 target value			**Valid mode(s)**	**P**	**S**	**T**
	Range	$-2^{31} \sim 2^{31}$	**Unit**	-	**Default**	0		
	Byte length	32bit	**Attribute**	R/W	**485 address**	0x2C28~0x2C7B		
	Valid	Immediate	Example：P03.32 H: 0x0340 L: 0x341 P03.33 H: 0x0342 L: 0x343					

When target position (value) is reached, position comparison output will be dependent on the position comparison attribute value set.

P0C.70	**Label**	Position comparison 1 and 2 attribute value			**Valid mode(s)**	**P**	**S**	**T**
	Range	$-2^{31} \sim 2^{31}-1$	**Unit**	-	**Default**	0		
	Byte length	32bit	**Attribute**	R/W	**485 address**	0x2C8D		
	Valid	Immediate						

To set attribute value for position comparison 1 and 2

Bit	Position comparison 1
0	Positive crossing comparison. 0=OFF,1=ON
1	Negative crossing comparison. 0=OFF,1=ON
2~5	Reserved
6	Output property settings： =0：Pulse mode =1：Flipping mode
7	DO1
8	DO2
9	DO3
10~12	Reserved
13	Frequency divider Phase A output
14	Frequency divider Phase B output
15	Frequency divider Phase Z output

Bit	Position comparison 2
16	Positive traversal comparison. 0=OFF,1=ON
17	Negative traversal comparison. 0=OFF,1=ON
18~21	Reserved
22	Output property settings： =0：Pulse mode =1：Flipping mode
23	DO1
24	DO2
25	DO3
26~28	Reserved
29	Frequency divider Phase A output
30	Frequency divider Phase B output
31	Frequency divider Phase Z output


Working principle

- **Position Comparison Enable – P0C.00**
  When P0C.00 changes from 0 to 1, comparison starts; current status is updated to the start point. When set to 0, comparison ends and status resets.
- **Single Comparison Mode**
  When the end point is reached, comparison disables and current value resets. Re-enables only when the enable signal is triggered again. Realtime position (P0C.10) accumulates linearly and does not reset automatically.
- **Loop Comparison Mode**
  When the end point is reached, comparison continues. Current value resets to start point. Realtime position (P0C.10) resets each loop. All target points are relative.
- **Fixed Loop Mode**
  Same as loop mode, but loop count is set via P0C.13. Comparison disables after reaching set count.
- **Position Comparison Pulse Width – P0C.02**
  When condition is met, DO/frequency output is active. Pulse width is set by P0C.02 (range: 1~4095 × 0.1ms). During output, comparison logic pauses; ensure motion time > output width.
- **Target Comparison Points**
  Up to 42 target points. Values and attributes set via P0C.20~P0C.90.
- **Start Comparison Point – P0C.04**
  Defines the first target point. E.g., set to 5 means start from the 5th point.
- **End Comparison Point – P0C.05**
  Defines the last target point. E.g., set to 7 means stop after 7th point or loop back.
- **Zero Offset – P0C.08**
  When P0C.07 switches 0 → 1, current position becomes the offset value set in P0C.08.

Applying position comparison


When the attribute of position comparison is set to positive crossing, position feedback becomes larger, position comparison will be enabled; if position feedback becomes smaller, it indicates negative crossing and position comparison will be disabled.

Diagram below shows position comparison point 1 as positive crossing and position comparison point 2 as negative crossing. When position comparison point 2 is positively crossed, position comparison will be disabled.

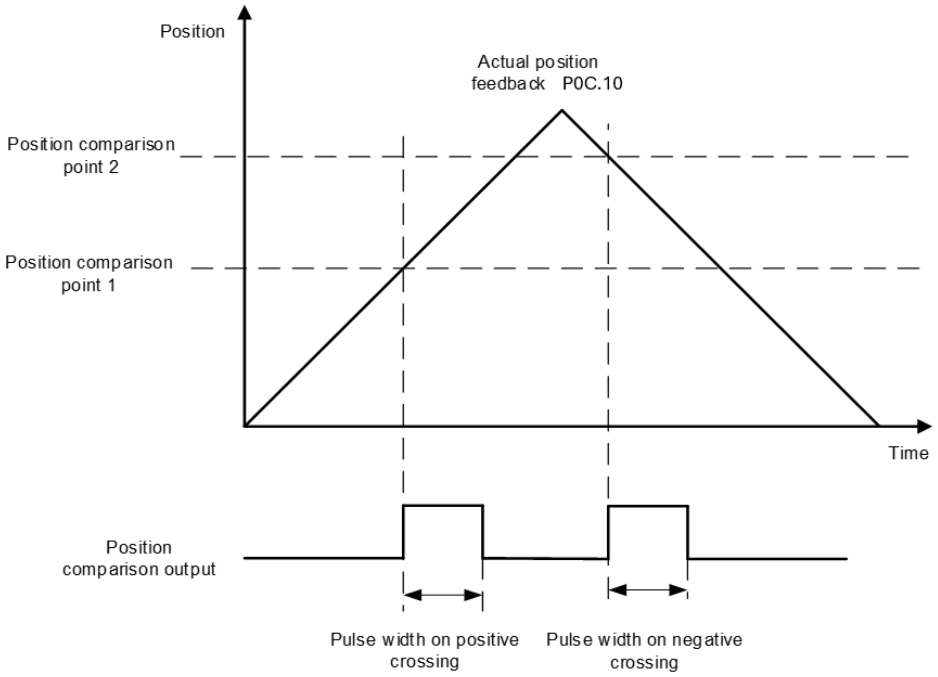


When multiple position comparison points are set, make sure the travel time between 2 comparison points are larger than the output pulse width as position comparison will be temporarily disabled during output.


Diagram below shows travel time between 2 points is smaller than output pulse width

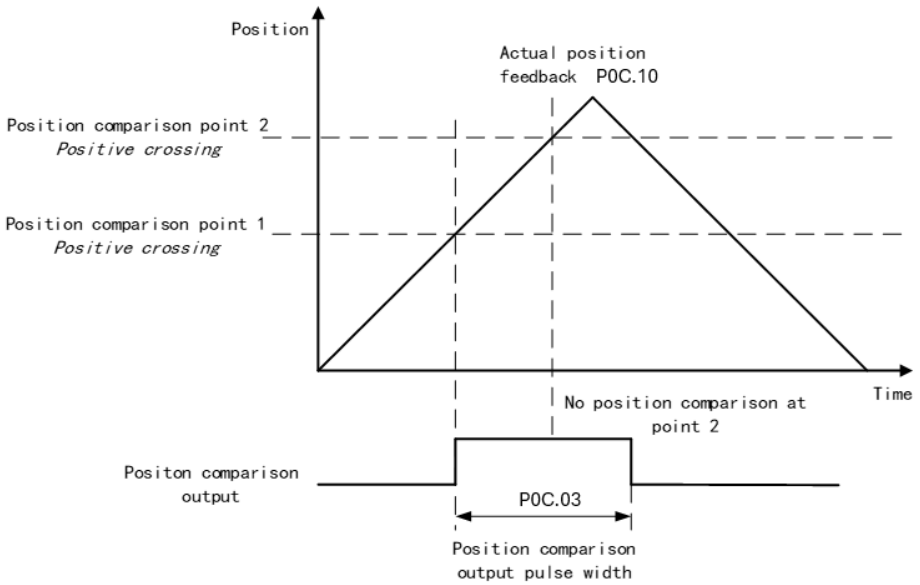

When stopping at position comparison point, there will only be 1 pulse output.

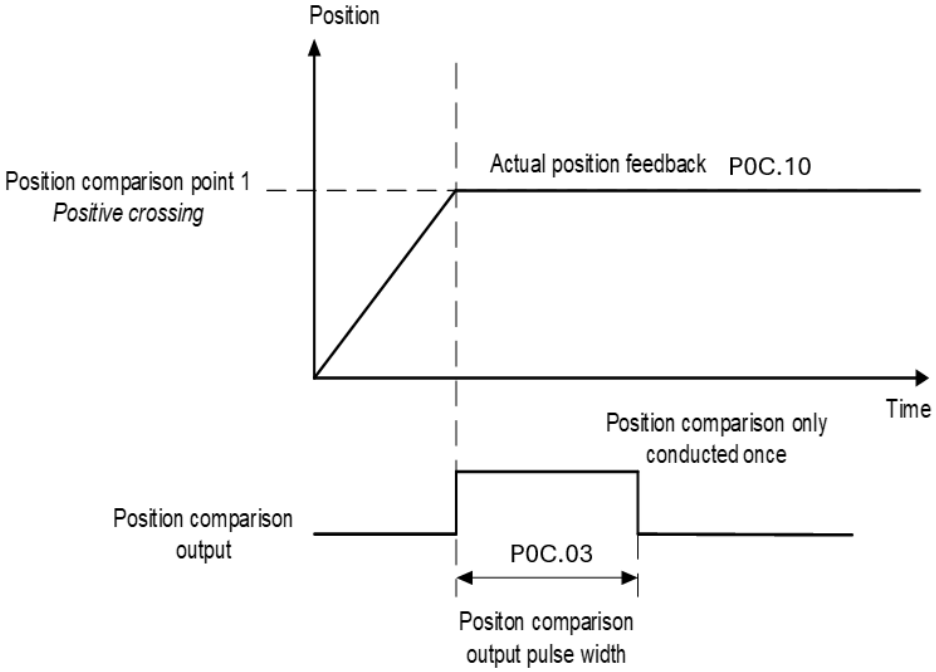


In overturn mode, output pulse width will be overturned.

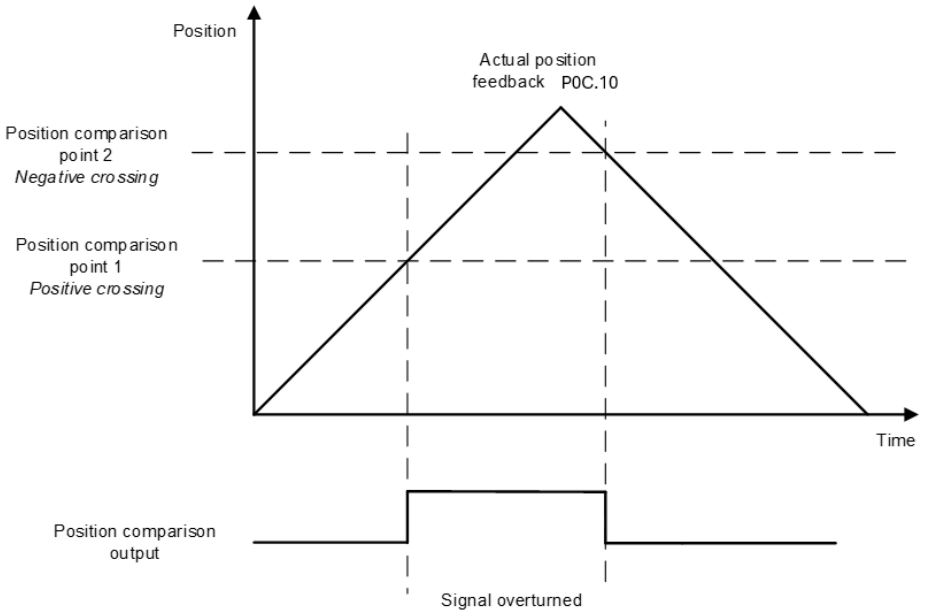


11.4 Gantry Function Application

11.4.1 Function Overview

The gantry function is used to achieve synchronization of two axes. Equipment with a gantry synchronization structure requires dual-side driving of two motors to ensure synchronization. To achieve this, the feedback from both sides is cross-referenced for comparison, ensuring synchronization on both sides.

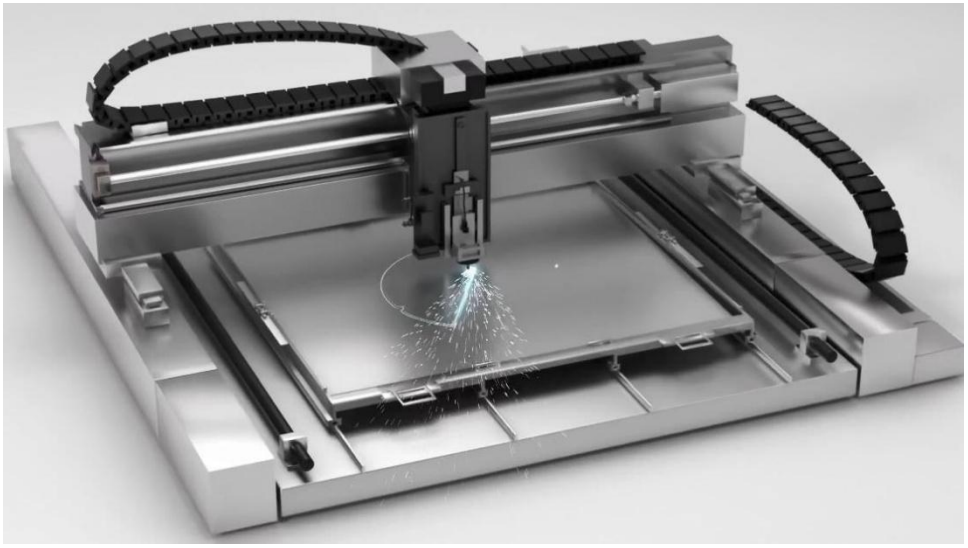

The gantry system uses two parallel axes (Y1 and Y2) to control a single linear axis, which is orthogonal (at 90° angle) to the system's X axis.

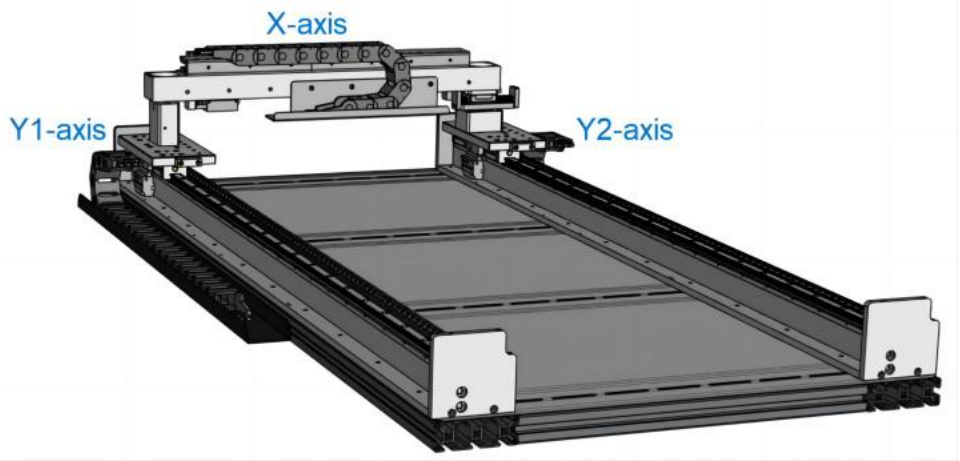

To improve the synchronization of the two axes during operation, a synchronization mode must be used. The gantry synchronization control is entirely completed by the servo driver, while the upper computer only performs simple open-loop position control and logic control.

Gantry Function Purposes:

- Achieve alignment and synchronized tracking of two axes in the equipment. The drive will perform synchronization control independently, without the need for complex upper computer control.
- Issue a warning and stop system operation when the position deviation exceeds the set allowable value.
- Suitable for applications requiring two-axis synchronization, such as semiconductor, welding and cutting equipment, glass processing, and large planers.

11.4.2 Related Parameters


Parameter Number	Label	Description	Activation
Basic Settings			
P00.01	Control Mode Settings	Set control mode	Restart
P00.06	Command pulse input mode settings	Sets the motor's forward rotation direction. When the gantry function is enabled: **Main Axis**: Sets the command pulse input polarity, in conjunction with P00.07. **Slave Axis**: Sets the relationship between the forward rotation direction of the slave axis and the main axis. If set to 0, it is the same as the main axis's forward direction; if set to 1, it is opposite to the main axis's forward direction. **Note**: Incorrect setting of this parameter can cause gantry errors and even damage the mechanical structure!	Restart
Gantry Settings			
P0D.00	Gantry Configuration	Default is 0, which means the gantry function is not enabled. Bit0: Gantry function switch, 0 to disable, 1 to enable. Bit1: Master-slave axis switch, 0 for slave axis, 1 for master axis. Bit2: Synchronization of some parameters of the slave axis with the master axis control: 0 for not synchronization, 1 for synchronization.	Restart
P0D.01	Gantry Slave Axis Command Mode	0: Torque command synchronization 1: Position command synchronization	Re-Enable
P0D.02	Gantry Gain 1	Gantry synchronization feedback compensation gain setting. This is only effective in position command gantry mode. 0: Gain is 0, equivalent to center position feedback, with the smallest torque deviation and the largest position deviation. 100: Default value, gain is 100%, balancing torque and position deviation. 1-100: For rigid gantry, reducing the gain can decrease torque deviation during movement. 100-300: For flexible gantry, increasing the gain can decrease position deviation during movement.	Re-Enable
P0D.03	Gantry position synchronization deviation threshold	Unit: Pulse 0: Disable position synchronization deviation alarm	Immediate
P0D.04	Gantry torque deviation threshold	Unit: 0.1% 0: Disable torque synchronization deviation alarm	Immediate

P0D.05	Gantry Gain 2	This parameter of the synchronous controller suppresses the torque deviation between the two axes. It is only effective in position command synchronization mode. 0: Disable torque deviation suppression. 1-1000: The larger the value, the better the torque deviation suppression effect, but it will lead to a decrease in the speed loop's maximum gain. It is generally enabled in gantries with high mechanical rigidity. If a high-speed loop gain is required, this value should not be set too high. It can be used in conjunction with P06.73 to suppress torque deviation.	Immediate
P0D.06	Gantry Position Gain	Set gantry position gain	Immediate
P0D.07	Gantry Velocity Gain	Set gantry velocity gain	Immediate
P0D.08	Gantry Velocity Integral	Set gantry velocity integral	Immediate

11.4.3 Implementation Steps

Wiring


Y1 is gantry master axis, Y2 is gantry slave axis.

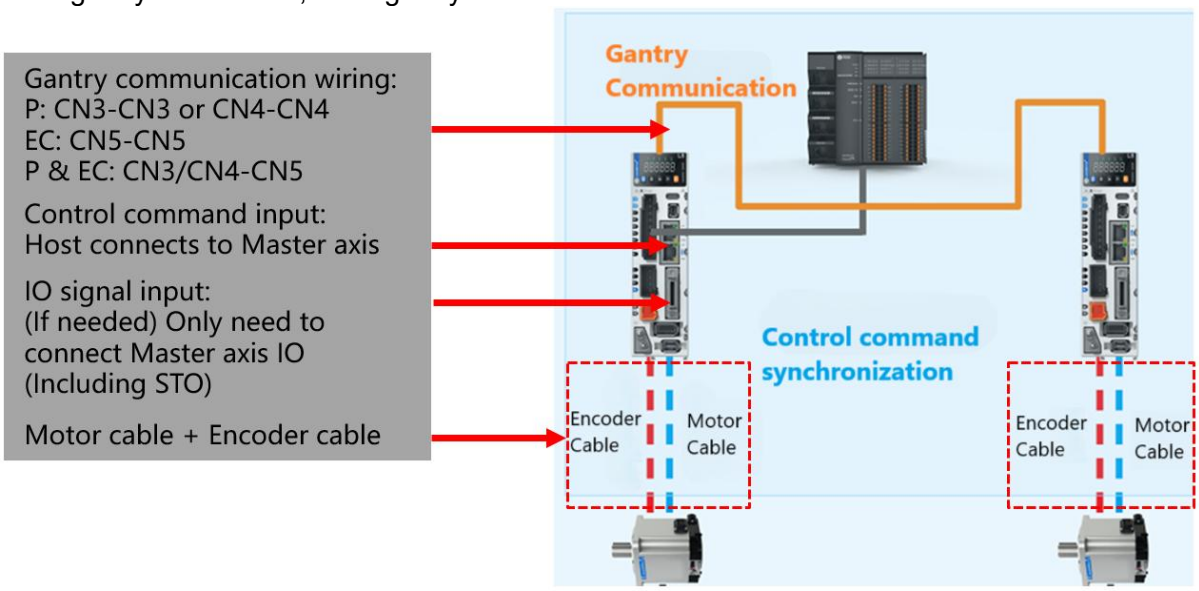

Note:

- Only the master axis Y1 needs to be connected to the controller's command pulse.
- The gantry communication between the master and slave axes is established via Ethernet cable connected between CN3 and CN4.

Debugging Workflow

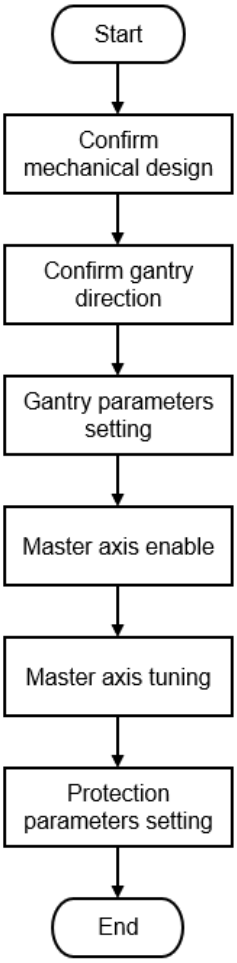

Start

Identify whether the system is a rigid gantry or flexible gantry.

Check if the master and slave axes move in the same or opposite direction.

Configure parameters for each axis individually. Save and restart after setting.

Slave axis will follow automatically.

Tune MFC, rigidity, and inertia on the master axis.
Slave axis will auto-sync these settings.

Set based on synchronization position and torque deviation.

After setting, save the two-axis parameters and restart to make them effective.

Debugging Steps

1. Confirm mechanical design
Flexible Gantry: Set slave command mode P0D.01 = 1
Rigid Gantry: Set slave command mode P0D.01 = 0
2. Confirm gantry direction

Method	Description
Manual Push (for small systems)	Connect upper computer to master axis and collect “unfiltered speed feedback”. Push gantry in one direction. Repeat for slave axis. If speed signs match → same direction. If signs differ → opposite direction.
Test Run (for large systems)	Disconnect one axis power cable and disable DB state. Perform jog test run and collect “unfiltered speed feedback”. Repeat for both axes. If speed signs match → same direction. If signs differ → opposite direction.

3. Gantry parameters setting
Configure the master axis and slave axis motor parameters separately.

Function Code	Parameter Name	Master Axis	Slave Axis	Activation
P00.06	Command Pulse Polarity	Based on user's requirement	0: Same 1: Opposite	Restart
P0D.00	Gantry Configuration	3: The slave axis parameters partially synchronize the main axis control bit	1: No sync 5: Partial sync	Restart
P0D.01	Gantry Slave Axis Command Mode	Rigid Gantry: Set to 0 Flexible Gantry: Set to 1	Same as master	Re-enable
P0D.03	Gantry Position Synchronization Deviation Threshold	Default, not too large or zero	Same as master	Immediate
P0D.04	Gantry Torque Deviation Threshold	Default, not too large or zero	Same as master	Immediate

4. Master axis enable
Slave axis will auto-enable after enabling master axis.
5. Master axis tuning
Use trial run mode for synchronized motion. Tuning method same as single-axis.
6. Protection parameters setting
Set P0D.03 and P0D.04 according to the synchronization error and torque deviation during normal operation and control requirements.
Observe the maximum values of the "synchronous position error" and "synchronous torque error" of the oscilloscope channel during normal operation. It is recommended to set them to 2 times the maximum value.

Fault Codes & Monitoring Parameters

Fault Code	Description
Er250	Excessive gantry sync error
Er251	Gantry communication error after master enable
Er252	Slave axis not enabled
Er253	Excessive torque deviation
Er254	Gantry not in position control mode
Er255	Gantry alignment failed
Ar15	Slave not enabled within 2s of master enable
Ar16	Slave axis alarm
Ar17	Slave emergency stop active
Ar18	Slave limit active
Ar19	Slave PWM sync warning
Ar1A	Excessive gantry communication error
Ar1B	Incorrect gantry parameter settings

Monitoring Parameters

Oscilloscope Channel	Description
0x300	Slave feedback speed
0x301	Slave feedback position
0x302	Slave torque
0x303	Slave position error
0x304	Center position
0x305	Sync position error
0x306	Center speed
0x307	Sync torque error
0x308	Sync speed error

11.4.4 Precautions

Common problem solving
1: Motor Oscillation Due to Low Inertia Ratio
Solution: Manually increase inertia ratio



2: Axes Cannot Sync, Overload or Stall Fault
Solution:


- Check if both axes run in the same direction
- If master P00.06 = 1, slave P00.06 must be 0 (Slave inverts received command direction in sync mode)

11.5 Black Box


Black box is a function which allows users to set conditions or data to be captured whenever error occurs. The data will be recorded by black box at the moment of error occurrence and automatically saved. Thus, through Misumi EDrive, user can analyze cause of the problem with the aid of black box data.
Black box is deactivated by default. It is user configurable to choose whether to overwrite current data or when to overwrite the data in black box.

Black Box Trigger Settings


1. After Enable Black Box, there are three trigger modes: Trigger upon error, Trigger upon specific error, Trigger upon conditions.

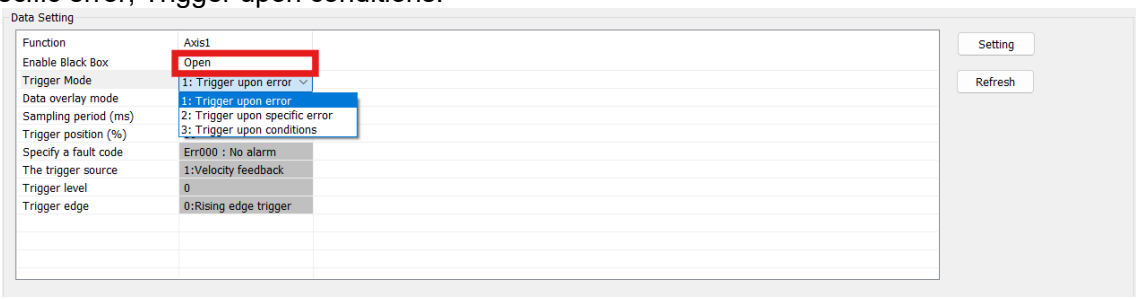

2. If select ‘Trigger upon specific error’, can choose specific error code:

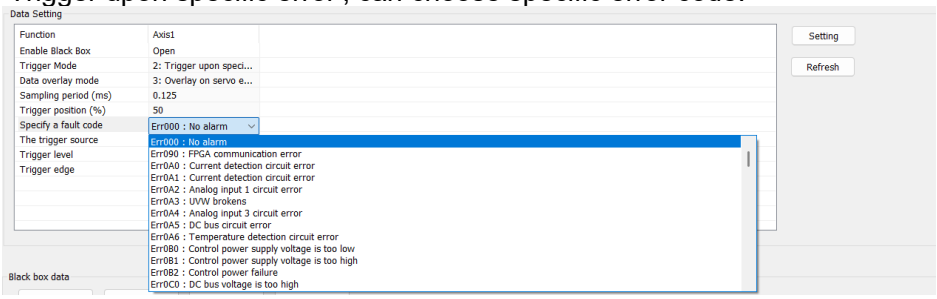

3. If select ‘Trigger upon conditions’, can choose the trigger source, Trigger level and Trigger edge:

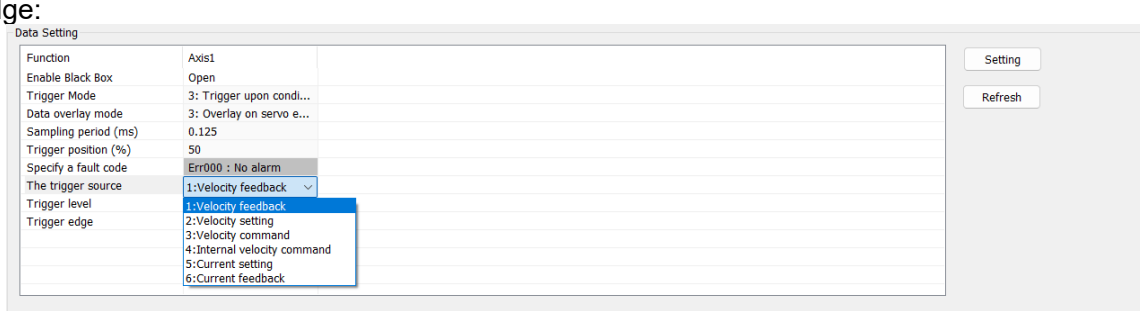

4. Choose whether black box data can be overwritten and when. If choose ‘No overlay’, the black box will only save data from the first fault trigger.



5. Sampling Period: Determines total sampling time and waveform resolution. Smaller values result in finer waveforms but shorter total sampling time.


6. Trigger Position: Can set the trigger point within the total sampling time. This is user-configurable.

7. After selecting black box properties, click “Setting” to download the configuration parameters to the driver.


Black Box Data Reading

When the black box contains fault waveform data, you can use the MISUMI EDrive Black Box Function to read or clear the data.

1. Click “Read Black Box”. This retrieves the current stored data. Click “Open Data” to enter the waveform display interface. You can also save or load data, export the black box data file to send to an engineer for analysis, or open a file sent by a user for review.

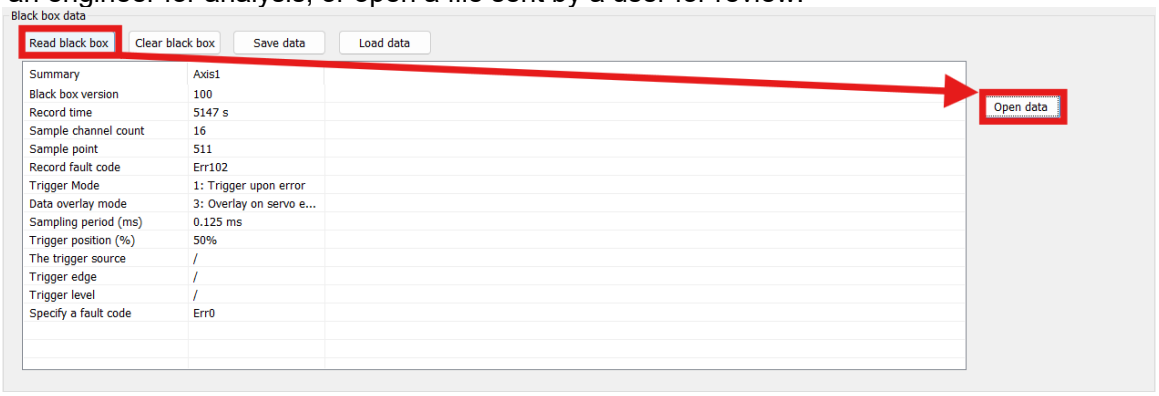

2. Black Box Waveform Display Interface: In this interface, you can configure which channels you want to view.

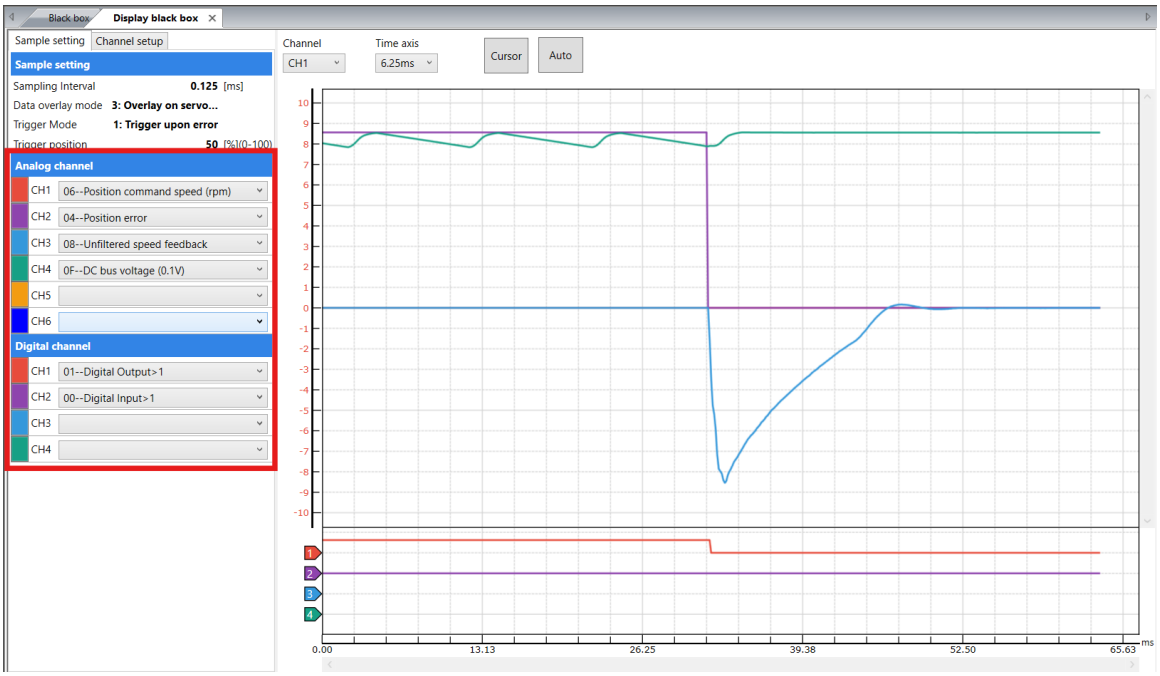

11.6 Full Closed Loop Control

Full closed loop control utilizes external position sensor (i.e. grading ruler) to get actual position feedback to implement position control. This control can compensate for lead screw tolerance and any changes due to temperature.
Parameters setting needs to make sure a smooth axis motion profile. No overtravel or abnormal noise at stopping.

1. Set external encoder
   External encoder type can be set accordingly in P00.31. At the moment, only ABZ incremental encoder is supported.

Parameter	Label	Range	Description
P00.31	External encoder type	0~3	=0：ABZ incremental encoder =1：Communication incremental encoder =2：Communication absolute incremental encoder (Tamagawa protocol) =3：BISS-C

2. Set direction of external encoder
   Please make sure the direction of the external encoder is the same as the motor encoder to prevent motor runaway.
   a) Enter position JOG mode. Jog the motor in the same direction at low velocity. Monitor if the feedback value of d21 absolute encoder single turn position and d21_1 external encoder are changing in the same trend. If they are not the same, inverse the setting of P00.32.
   b) The feedback value of d21 and d21_1 can be verified by pushing the axis and monitoring the trend of the changes. Please make sure the servo axis is disabled.
   c) Use trial run to set up a reciprocating motion. Max velocity > 200rpm. If d49 = 1 after several cycles of motion, set P00.32 to 1; d48 External encoder feedback pulse count per revolution.
3. Set external encoder feedback pulse count
   When P00.37 = 0, set external encoder feedback pulse count per revolution in P00.36. If the lead size of lead screw and encoder accuracy are known, please calculate using the formula below and enter the result into P00.36.

$$\text{P00.36} = \frac{\text{Lead size of lead screw (mm)}}{\text{Encoder accuracy } (\frac{\mu\text{m}}{\text{pulse}})}$$

   23-bit encoder resolution = 8388608 pulses
   Please make sure the parameters are set correctly to avoid excessive position deviation especially after long range motion. This may trigger excessive hybrid control deviation error alarm.

Parameter	Label	Range	Description
P00.35	External encoder frequency divider numerator	0~2^{23}	To set external encoder frequency divider numerator When P00.35 = 0, numerator = resolution of encoder
P00.36	External encoder frequency divider denominator	1~2^{23}	To set external encoder frequency divider denominator
P00.37	External encoder feedback pulse count per revolution	0~2147483648	When P00.37 = 0, P00.36 set value = external encoder feedback pulse count per revolution.

4. Set alarm threshold
   - Excessive hybrid deviation (P00.33)

   To set alarm threshold value for the position deviation between motor actual position and external encoder actual position. Er191 might occur if position deviation exceeds alarm threshold value.
   - Clear hybrid control deviation (P00.34)

   Use to set the condition to clear hybrid control deviation (Only in full closed loop control mode)


Set value	Description
【0】	OFF
1~100	Revolution count to clear hybrid control deviation

5. Set encoder feedback mode
   Set P00.30 = 1 to enable external encoder feedback, this is to activate full closed loop control. P00.01 needs to be set to 1 to enable this function. Please restart driver after modifying this parameter.

Parameter	Label	Range	Description
P00.30	Encoder feedback mode	0~2	=0：Motor encoder =1：External encoder (Full closed loop control) =2：Reserved

Appendix I - Parameter

Parameters List



Valid mode:
P: Valid in position control mode
S: Valid in velocity control mode
T: Valid in torque control mode
PR: Valid in PR control mode

Activation:
"O" – Restart driver for parameter changes to be valid
"—" – Valid immediately
"△" – Valid when axis stops
"●"- Valid after re-enabling

[Class 0] Basic settings

Code	Label	Default	Activation	Valid mode			Communication mode		
				P	S	T	Byte	Op.	485 Addr.
P00.00	Model-following bandwidth	1	△	O	—	—	16bit	R/W	0x0001
P00.01	Control Mode Settings	0	O	O	O	O	16bit	R/W	0x0003
P00.02	Real time Auto Gain Adjusting	0x1	—	O	O	O	16bit	R/W	0x0005
P00.03	Real time auto stiffness adjusting	11	—	O	O	O	16bit	R/W	0x0007
P00.04	Inertia ratio	250	—	O	O	O	16bit	R/W	0x0009
P00.05	Command pulse input selection	0	O	O	—	—	16bit	R/W	0x000B
P00.06	Command pulse polarity inversion	0	O	O	—	—	16bit	R/W	0x000D
P00.07	Command pulse input mode	3	O	O	—	—	16bit	R/W	0x000F
P00.08	1st command pulse count per revolution	10000	O	O	—	—	32bit	R/W	0x0010 0x0011
P00.09	1st command frequency divider/multiplier numerator	1	O	O	—	—	32bit	R/W	0x0012 0x0013
P00.10	1st command frequency divider/multiplier denominator	1	O	O	—	—	32bit	R/W	0x0014 0x0015
P00.11	Encoder output pulse count per revolution	2500	O	O	O	O	16bit	R/W	0x0017
P00.12	Pulse output logic inversion	0	O	O	O	O	16bit	R/W	0x0019
P00.13	1st Torque Limit	350	—	O	O	O	16bit	R/W	0x001B
P00.14	Excessive position deviation	30	—	O	—	—	16bit	R/W	0x001D
P00.15	Absolute Encoder settings	0	O	O	O	O	16bit	R/W	0x001F
P00.16	Regenerative resistance	100	—	O	O	O	16bit	R/W	0x0021
P00.17	Regenerative resistor power rating	50	—	O	O	O	16bit	R/W	0x0023
P00.22	PR and P/S/T switching	0	—	O	O	O	16bit	R/W	0x002D
P00.25	Auxiliary function	0	—	O	O	O	16bit	R/W	0x0033
P00.26	Simulated I/O	0	—	O	O	O	16bit	R/W	0x0035
P00.30	Encoder feedback mode	0	—	O	O	O	16bit	R/W	0x0037

Code	Label	Default	Activation	Valid mode			Communication mode		
				P	S	T	Byte	Op.	485 Addr.
P00.31	External encoder type	0	O	O	O	O	16bit	R/W	0x0039
P00.32	External encoder direction	0	O	O	O	O	16bit	R/W	0x003B
P00.33	Excessive hybrid deviation	16000	O	O			16bit	R/W	0x0043
P00.34	Clear excess hybrid control deviation	0	O	O			16bit	R/W	0x0045
P00.35	External encoder frequency divider numerator	0	O	O	O	O	16bit	R/W	0x0047
P00.36	External encoder frequency divider denominator	10000	O	O	O	O	16bit	R/W	0x0049
P00.37	External encoder feedback pulse count per revolution	0	O	O	O	O	16bit	R/W	0x004B
P00.38	Z-signal pulse input source	0	—	O	O	O	16bit	R/W	0x004D
P00.40	Mapping parameter 1	0x0	—	O	O	O	32bit	R/W *	0x0050 0x0051
P00.41	Mapping parameter 2	0x0	—	O	O	O	32bit	R/W *	0x0052 0x0053
P00.42	Mapping parameter 3	0x0	—	O	O	O	32bit	R/W *	0x0054 0x0055
P00.43	Mapping parameter 4	0x0	—	O	O	O	32bit	R/W *	0x0056 0x0057
P00.44	Mapping parameter 5	0x0	—	O	O	O	32bit	R/W *	0x0058 0x0059
P00.45	Mapping parameter 6	0x0	—	O	O	O	32bit	R/W *	0x005A 0x005b
P00.46	Mapping parameter 7	0x0	—	O	O	O	32bit	R/W *	0x005C 0x005d
P00.47	Mapping parameter 8	0x0	—	O	O	O	32bit	R/W *	0x005E 0x005F
P00.50	Mapping parameter 1 indicator	0x0049 0049	—	O	O	O	32bit	R/W	0x0064 0x0065
P00.51	Mapping parameter 2 indicator	0x0049 0049	—	O	O	O	32bit	R/W	0x0066 0x0067
P00.52	Mapping parameter 3 indicator	0x0049 0049	—	O	O	O	32bit	R/W	0x0068 0x0069
P00.53	Mapping parameter 4 indicator	0x0049 0049	—	O	O	O	32bit	R/W	0x006A 0x006B
P00.54	Mapping parameter 5 indicator	0x0049 0049	—	O	O	O	32bit	R/W	0x006C 0x006D
P00.55	Mapping parameter 6 indicator	0x0049 0049	—	O	O	O	32bit	R/W	0x006E 0x007F
P00.56	Mapping parameter 7 indicator	0x0049 0049	—	O	O	O	32bit	R/W	0x0070 0x0071
P00.57	Mapping parameter 8 indicator	0x0049 0049	—	O	O	O	32bit	R/W	0x0072 0x0073

[Class 1] Gain adjustment

Code	Label	Default	Activation	Valid mode			Communication mode		
				P	S	T	Byte	Op.	485 Addr.
P01.00	1st position loop gain	320	—	O	—	—	16bit	R/W	0x0101
P01.01	1st velocity loop gain	180	—	O	O	O	16bit	R/W	0x0103
P01.02	1st Integral Time Constant of Velocity Loop	310	—	O	O	O	16bit	R/W	0x0105
P01.03	1st velocity detection filter	15	—	O	O	O	16bit	R/W	0x0107
P01.04	1st Torque Filter Time Constant	126	—	O	O	O	16bit	R/W	0x0109
P01.05	2nd Position Loop Gain	380	—	O	—	—	16bit	R/W	0x010B
P01.06	2nd velocity loop gain	180	—	O	O	O	16bit	R/W	0x010D
P01.07	2nd Integral Time Constant of Velocity Loop	10000	—	O	O	O	16bit	R/W	0x010F
P01.08	2nd velocity detection filter	15	—	O	O	O	16bit	R/W	0x0111
P01.09	2nd Torque Filter Time Constant	126	—	O	O	O	16bit	R/W	0x0113
P01.10	Velocity feed forward gain	300	—	O	—	—	16bit	R/W	0x0115
P01.11	Velocity feed forward filter time constant	50	—	O	—	—	16bit	R/W	0x0117
P01.12	Torque feed forward gain	0	—	O	O	—	16bit	R/W	0x0119
P01.13	Torque feed forward filter time constant	0	—	O	O	—	16bit	R/W	0x011B
P01.15	Position control gain switching mode	0	—	O	—	—	16bit	R/W	0x011F
P01.17	Position control gain switching level	50	—	O	—	—	16bit	R/W	0x0123
P01.18	Hysteresis at position control switching	33	—	O	—	—	16bit	R/W	0x0125
P01.19	Position control switching time	33	—	O	—	—	16bit	R/W	0x0127
P01.35	Position command pulse filter time	8	O	O	—	—	16bit	R/W	0x0147
P01.36	External ABZ encoder filter time	3	O	O	—	—	16bit	R/W	0x0149
P01.39	Special function register 2	0	—	O	O	O	16bit	R/W	0x014F

[Class 2] Vibration Suppression

Code	Label	Default	Activation	Valid mode			Communication mode		
				P	S	T	Byte	Op.	485 Addr.
P02.00	Adaptive filtering mode settings	0	—	O	O	—	16bit	R/W	0x0201
P02.01	1st notch frequency	4000	—	O	O	O	16bit	R/W	0x0203
P02.02	1st notch width	4	—	O	O	O	16bit	R/W	0x0205
P02.03	1st notch depth	0	—	O	O	O	16bit	R/W	0x0207
P02.04	2nd notch frequency	4000	—	O	O	O	16bit	R/W	0x0209
P02.05	2nd notch width	4	—	O	O	O	16bit	R/W	0x020B
P02.06	2nd notch depth	0	—	O	O	O	16bit	R/W	0x020D
P02.07	3rd notch frequency	4000	—	O	O	O	16bit	R/W	0x020F
P02.08	3rd notch width	4	—	O	O	O	16bit	R/W	0x0211
P02.09	3rd notch depth	0	—	O	O	O	16bit	R/W	0x0213
P02.14	1st damping frequency	0	—	O	—	—	16bit	R/W	0x021D
P02.16	2nd damping frequency	0	—	O	—	—	16bit	R/W	0x0221
P02.22	Position command smoothing filter	0	△	O	—	—	16bit	R/W	0x022D
P02.23	Position command FIR filter	0	△	O	—	—	16bit	R/W	0x022F
P02.48	Adjustment mode	0	—	O	O	O	16bit	R/W	0x0261
P02.50	MFC type	0	•	O	—	—	16bit	R/W	0x0265
P02.51	Velocity feedforward compensation coefficient	0	—	O	—	—	16bit	R/W	0x0267
P02.52	Torque feedforward compensation coefficient	0	—	O	O	—	16bit	R/W	0x0269
P02.53	Dynamic friction compensation coefficient	0	—	O	O	O	16bit	R/W	0x026B
P02.54	Overshoot time coefficient	0	—	O	O	O	16bit	R/W	0x026D
P02.55	Overshoot suppression gain	0	—	O	O	O	16bit	R/W	0x026F

[Class 3] Velocity / Torque Control

Code	Label	Default	Activation	Valid mode			Communication mode		
				P	S	T	Byte	Op.	485 Addr.
P03.00	Velocity internal/external switching	1	—	—	O	—	16bit	R/W	0x0301
P03.01	Velocity command rotational direction selection	0	—	—	O	—	16bit	R/W	0x0303
P03.02	Velocity command input gain	500	—	—	O	O	16bit	R/W	0x0305
P03.03	Velocity command input inversion	0	—	—	O	—	16bit	R/W	0x0307
P03.04	1st speed of velocity setting	0	—	—	O	—	16bit	R/W	0x0309
P03.05	2nd speed of velocity setting	0	—	—	O	—	16bit	R/W	0x030B
P03.06	3rd speed of velocity setting	0	—	—	O	—	16bit	R/W	0x030D
P03.07	4th speed of velocity setting	0	—	—	O	—	16bit	R/W	0x030F
P03.08	5th speed of velocity setting	0	—	—	O	—	16bit	R/W	0x0311
P03.09	6th speed of velocity setting	0	—	—	O	—	16bit	R/W	0x0313
P03.10	7th speed of velocity setting	0	—	—	O	—	16bit	R/W	0x0315
P03.11	8th speed of velocity setting	0	—	—	O	—	16bit	R/W	0x0317
P03.12	Acceleration time settings	100	—	—	O	—	16bit	R/W	0x0319
P03.13	Deceleration time settings	100	—	—	O	—	16bit	R/W	0x031B
P03.14	Sigmoid acceleration/deceleration settings	0	O	—	O	—	16bit	R/W	0x031D
P03.15	Zero speed clamp function selection	0	—	—	O	—	16bit	R/W	0x031F
P03.16	Zero speed clamp level	30	—	—	O	—	16bit	R/W	0x0321
P03.17	Torque internal/external switching	0	—	—	—	O	16bit	R/W	0x0323
P03.18	Torque command direction selection	0	—	—	—	O	16bit	R/W	0x0325
P03.19	Torque command input gain	30	—	—	—	O	16bit	R/W	0x0327
P03.20	Torque command input inversion	0	—	—	—	O	16bit	R/W	0x0329
P03.21	Velocity limit in torque mode	0	—	—	—	O	16bit	R/W	0x032B
P03.22	Torque command	0	—	O	O	O	16bit	R/W	0x032D

Code	Label	Default	Activation	Valid mode			Communication mode		
				P	S	T	Byte	Op.	485 Addr.
P03.23	Zero speed delay time in velocity mode	0	—	—	O	—	16bit	R/W	0x032F
P03.24	Maximum motor rotational speed	0	—	O	O	O	16bit	R/W	0x0331
P03.29	Analog 1 clamping voltage	0	—	—	—	O	16bit	R/W	0x033B
P03.30	Analog 3 clamping voltage	0	—	—	—	O	16bit	R/W	0x033D

[Class 4] I/O Monitoring Settings

Code	Label	Default	Activation	Valid mode			Communication mode		
				P	S	T	Byte	Op.	485 Addr.
P04.00	Input selection DI1	0x3	—	O	O	O	16bit	R/W	0x0401
P04.01	Input selection DI2	0x1	—	O	O	O	16bit	R/W	0x0403
P04.02	Input selection DI3	0x2	—	O	O	O	16bit	R/W	0x0405
P04.03	Input selection DI4	0x6	—	O	O	O	16bit	R/W	0x0407
P04.04	Input selection DI5	0xC	—	O	O	O	16bit	R/W	0x0409
P04.05	Input selection DI6	0x7	—	O	O	O	16bit	R/W	0x040B
P04.06	Input selection DI7	0x4	—	O	O	O	16bit	R/W	0x040D
P04.07	Input selection DI8	0x5	—	O	O	O	16bit	R/W	0x040F
P04.08	Input selection DI9	0x8	—	O	O	O	16bit	R/W	0x0411
P04.09	Input selection DI10	0x0	—	O	O	O	16bit	R/W	0x0413
P04.10	Output selection DO1	0x3	—	O	O	O	16bit	R/W	0x0415
P04.11	Output selection DO2	0x2	—	O	O	O	16bit	R/W	0x0417
P04.12	Output selection DO3	0x1	—	O	O	O	16bit	R/W	0x0419
P04.13	Output selection DO4	0x4	—	O	O	O	16bit	R/W	0x041B
P04.14	Output selection DO5	0x7	—	O	O	O	16bit	R/W	0x041D
P04.15	Output selection DO6	0x6	—	O	O	O	16bit	R/W	0x041F
P04.22	Analog input 1(AI-1) Zero drift settings	0	—	—	O	O	16bit	R/W	0x042D
P04.23	Analog input 1(AI-1) filter	0	—	—	O	O	16bit	R/W	0x042F
P04.24	Analog input 1(AI-1) overvoltage settings	0	—	—	O	O	16bit	R/W	0x0431
P04.25	Analog input 2(AI-2) Zero drift settings	0	—	—	O	O	16bit	R/W	0x0439
P04.26	Analog input 2(AI-2) filter	0	—	—	O	O	16bit	R/W	0x043B
P04.27	Analog input 2(AI-2) overvoltage settings	0	—	—	—	O	16bit	R/W	0x043D
P04.28	Analog input 3(AI-3) Zero drift settings	20	—	O	—	—	16bit	R/W	0x043F
P04.29	Analog input 3(AI-3) filter	1	—	O	—	—	16bit	R/W	0x0441
P04.30	Analog input 3(AI-3) overvoltage settings	0	—	O	—	—	16bit	R/W	0x0443
P04.31	Positioning complete range	50	—	O	O	O	16bit	R/W	0x0445
P04.32	Positioning complete output setting	50	—	—	O	—	16bit	R/W	0x0447
P04.33	INP positioning delay time	1000	—	—	O	—	16bit	R/W	0x0449
P04.34	Zero speed	150	—	O	O	O	16bit	R/W	0x044B
P04.35	Velocity coincidence range	0	—	O	O	O	16bit	R/W	0x044D
P04.36	Arrival velocity	30	—	O	O	O	16bit	R/W	0x044F
P04.37	Motor Power-off Delay Time	150	—	O	O	O	16bit	R/W	0x044B
P04.43	Emergency stop function	0	—	O	O	O	16bit	R/W	0x0457
P04.64	AO1 output	0	—	O	O	O	16bit	R/W	0x0481
P04.65	AO1 signal	0x4	—	O	O	O	16bit	R/W	0x0483
P04.66	AO1 amplification	100	—	O	O	O	16bit	R/W	0x0485
P04.67	AO1 communication settings	0	—	O	O	O	16bit	R/W	0x0487
P04.68	AO1 offset	0	—	O	O	O	16bit	R/W	0x0489
P04.69	AO2 output	0	—	O	O	O	16bit	R/W	0x048B
P04.70	AO2 signal	0x1	—	O	O	O	16bit	R/W	0x048D
P04.71	AO2 amplification	100	—	O	O	O	16bit	R/W	0x048F
P04.72	AO2 communication settings	0	—	O	O	O	16bit	R/W	0x0491
P04.73	AO2 offset	0	—	O	O	O	16bit	R/W	0x0493
P04.74	Warning indicator light 1 signal	1	—	O	O	O	16bit	R/W	0x0495
P04.75	Warning indicator light 2 signal	2	—	O	O	O	16bit	R/W	0x0497
P04.76	Warning indicator light 3 signal	3	—	O	O	O	16bit	R/W	0x0499
P04.77	Warning indicator light 4 signal	4	—	O	O	O	16bit	R/W	0x049B
P04.78	Warning indicator light 5 signal	5	—	O	O	O	16bit	R/W	0x049D

[Class 5] Extension settings

Code	Label	Default	Activation	Valid mode			Communication mode		
				P	S	T	Byte	Op.	485 Addr.
P05.00	2nd pulse count per revolution	10000	O	O	—	—	32bit	R/W	0x0500 0x0501
P05.01	2nd Command frequency divider/multiplier numerator	1	O	O	—	—	32bit	R/W	0x0502 0x0503
P05.02	2nd Command frequency divider/multiplier denominator	1	O	O	—	—	32bit	R/W	0x0504 0x0505
P05.04	Driver prohibition input settings	0	—	O	O	O	16bit	R/W	0x0509
P05.06	Servo-off mode	0	—	O	O	O	16bit	R/W	0x050D
P05.09	Main power-off detection time	50	—	O	O	O	16bit	R/W	0x0513
P05.10	Servo-off due to alarm mode	0	O	O	O	O	16bit	R/W	0x0515
P05.11	Servo braking torque setting	0	—	O	O	O	16bit	R/W	0x0517
P05.12	Overload level setting	0	—	O	O	O	16bit	R/W	0x0519
P05.13	Overspeed level settings	0	—	O	O	O	16bit	R/W	0x051B
P05.15	I/O digital filter	0	O	O	O	O	16bit	R/W	0x051F
P05.17	Counter clearing input mode	3	—	O	—	—	16bit	R/W	0x0523
P05.20	Position unit settings	1	—	O	—	—	16bit	R/W	0x0529
P05.21	Torque limit selection	0	—	O	O	O	16bit	R/W	0x052B
P05.22	2nd torque limit	300	—	O	O	O	16bit	R/W	0x052D
P05.23	Positive torque warning threshold	0	—	O	O	O	16bit	R/W	0x052F
P05.24	Negative torque warning threshold	0	—	O	O	O	16bit	R/W	0x0531
P05.28	LED initial status	1	—	O	O	O	16bit	R/W	0x0539
P05.29	RS485 communication mode	0x5	—	O	O	O	16bit	R/W	0x053B
P05.30	RS485 communication Baud rate	4	—	O	O	O	16bit	R/W	0x053D
P05.31	RS485 axis address	1	—	O	O	O	16bit	R/W	0x053F
P05.32	Max. command pulse input frequency	0	—	O	—	—	16bit	R/W	0x0541
P05.35	Front panel lock setting	0	—	O	O	O	16bit	R/W	0x0547
P05.37	Torque saturation alarm detection time	500	—	O	O	O	16bit	R/W	0x0549
P05.42	Frequency divider output – Z-signal polarity	0	O	O	O	O	16bit	R/W	0x0555
P05.43	Frequency divider output – Z-signal width	0	O	O	O	O	16bit	R/W	0x0557
P05.44	Frequency divider output source	0	O	O	O	O	16bit	R/W	0x0559
P05.46	External encoder overspeed feedback threshold	0	O	O	O	O	16bit	R/W	0x055D

[Class 6] Other Settings

Code	Label	Default	Activation	Valid mode			Communication mode		
				P	S	T	Byte	Op.	485 Addr.
P06.01	Encoder zero position compensation	0	O	O	O	O	16bit	R/W	0x0603
P06.03	JOG trial run torque command	350	—	—	—	O	16bit	R/W	0x0607
P06.04	JOG trial run velocity command	30	—	O	O	O	16bit	R/W	0x0609
P06.05	Position 3rd gain valid time	0	—	O	—	—	16bit	R/W	0x060B
P06.06	Position 3rd gain scale factor	100	—	O	—	—	16bit	R/W	0x060D
P06.07	Torque command additional value	0	—	O	O	O	16bit	R/W	0x060F
P06.08	Positive direction torque compensation value	0	—	O	O	O	16bit	R/W	0x0611
P06.09	Negative direction torque compensation value	0	—	O	O	O	16bit	R/W	0x0613
P06.11	Current response settings	100	—	O	O	O	16bit	R/W	0x0617
P06.14	Max. time to stop after disabling	500	—	O	O	O	16bit	R/W	0x061D
P06.20	Trial run distance	10	—	O	—	—	16bit	R/W	0x0629
P06.21	Trial run waiting time	300	—	O	—	—	16bit	R/W	0x062B
P06.22	No. of trial run cycles	5	—	O	—	—	16bit	R/W	0x062D
P06.25	Trial run acceleration	200	—	O	O	—	16bit	R/W	0x0633
P06.28	Observer gain	0	—	O	O	O	16bit	R/W	0x0639
P06.29	Observer filter	0	—	O	O	O	16bit	R/W	0x063B
P06.56	Blocked rotor alarm torque threshold	300	—	O	O	O	16bit	R/W	0x0671
P06.57	Blocked rotor alarm delay time	400	—	O	O	O	16bit	R/W	0x0673
P06.63	Absolute multiturn data upper limit	0	O	O	O	O	16bit	R/W	0x067F

[Class 8] PR Control Parameters

Code	Label	Default	Activation	Valid mode			Communication mode		
				PR	S	T	Byte	Op.	485 Addr.
P08.00	PR Control	0	—	O	—	—	16bit	R/W	0x6000
P08.01	Path count	16	—	O	—	—	16bit	R/W	0x6001
P08.02	Control Operation		—	O	—	—	16bit	R/W	0x6002
P08.06	Software positive limit H	0		O			16bit	R/W	0x6006
P08.07	Software positive limit (L)	0	—	O	—	—	16bit	R/W	0x6007
P08.08	Software negative limit H	0	—	O	—	—	16bit	R/W	0x6008
P08.09	Software negative limit (L)	0	—	O	—	—	16bit	R/W	0x6009
P08.10	Homing mode	0	—	O	—	—	16bit	R/W	0x600A
P08.11	Zero position H	0	—	O	—	—	16bit	R/W	0x600B
P08.12	Zero position (L)	0	—	O	—	—	16bit	R/W	0x600C
P08.13	Home position off set H	0	—	O	—	—	16bit	R/W	0x600D
P08.14	Home position off set (L)	0		O	—	—	16bit	R/W	0x600E
P08.15	High homing velocity	200	—	O	—	—	16bit	R/W	0x600F
P08.16	Low homing velocity	50	—	O	—	—	16bit	R/W	0x6010
P08.17	Homing acceleration	100	—	O	—	—	16bit	R/W	0x6011
P08.18	Homing deceleration	100	—	O	—	—	16bit	R/W	0x6012
P08.19	Homing torque holding time	100	—	O	—	—	16bit	R/W	0x6013
P08.20	Homing torque	100	—	O	—	—	16bit	R/W	0x6014
P08.21	Homing overtravel alarm range	0	—	O	—	—	16bit	R/W	0x6015
P08.22	Emergency stop at limit deceleration	10	—	O	—	—	16bit	R/W	0x6016
P08.23	STP emergency stop deceleration	50	—	O	—	—	16bit	R/W	0x6017
P08.26	I/O combination trigger mode	0	—	O	—	—	16bit	R/W	0x601A
P08.27	I/O commbination filter	5	—	O	—	—	16bit	R/W	0x601B
P08.28	S-code current output value	0	—	O	—	—	16bit	R/W	0x601C
P08.29	PR warning	0	—	O	—	—	16bit	R/W	0x601D
P08.39	JOG velocity	100	—	O	—	—	16bit	R/W	0x6027
P08.40	JOG acceleration	100	—	O	—	—	16bit	R/W	0x6028
P08.41	JOG deceleration	100	—	O	—	—	16bit	R/W	0x6029
P08.42	Command position H	0	—	O	—	—	16bit	R/W	0x602A
P08.43	Command position（L）	0	—	O	—	—	16bit	R/W	0x602B
P08.44	Motor position H	0	—	O	—	—	16bit	R/W	0x602C
P08.45	Motor position（L）	0	—	O	—	—	16bit	R/W	0x602D
P08.46	Input I/O status	0	—	O	—	—	16bit	R/W	0x602E

Code	Label	Default	Activation	Valid mode			Communication mode		
				PR	S	T	Byte	Op.	485 Addr.
P08.47	Output I/O status	0	—	O	—	—	16bit	R/W	0x602F
P08.48	Path 0 S-code	0	—	O	—	—	16bit	R/W	0x6030
P08.49	Path 1 S-code	0	—	O	—	—	16bit	R/W	0x6031
P08.50	Path 2 S-code	0	—	O	—	—	16bit	R/W	0x6032
P08.51	Path 3 S-code	0	—	O	—	—	16bit	R/W	0x6033
P08.52	Path 4 S-code	0	—	O	—	—	16bit	R/W	0x6034
P08.53	Path 5 S-code	0	—	O	—	—	16bit	R/W	0x6035
P08.54	Path 6 S-code	0	—	O	—	—	16bit	R/W	0x6036
P08.55	Path 7 S-code	0	—	O	—	—	16bit	R/W	0x6037
P08.56	Path 8 S-code	0	—	O	—	—	16bit	R/W	0x6038
P08.57	Path 9 S-code	0	—	O	—	—	16bit	R/W	0x6039
P08.58	Path 10 S-code	0	—	O	—	—	16bit	R/W	0x603A
P08.59	Path 11 S-code	0	—	O	—	—	16bit	R/W	0x603B
P08.60	Path 12 S-code	0	—	O	—	—	16bit	R/W	0x603C
P08.61	Path 13 S-code	0	—	O	—	—	16bit	R/W	0x603D
P08.62	Path 14 S-code	0	—	O	—	—	16bit	R/W	0x603E
P08.63	Path 15 S-code	0	—	O	—	—	16bit	R/W	0x603F

[Class 9] PR Control Path Parameters

Code	Label	Default	Activation	Valid mode			Communication mode		
				PR	S	T	Byte	Op.	485 Addr.
P09.00	P00 mode	0	—	O	—	—	16bit	R/W	0x6200
P09.01	P00 position H	0	—	O	—	—	16bit	R/W	0x6201
P09.02	P00 position(L)	0	—	O	—	—	16bit	R/W	0x6202
P09.03	P00 velocity	60		O	—	—	16bit	R/W	0x6203
P09.04	P00 acceleration time	100	—	O	—	—	16bit	R/W	0x6204
P09.05	P00 deceleration time	100	—	O	—	—	16bit	R/W	0x6205
P09.06	P00 pause time	0	—	O	—	—	16bit	R/W	0x6206
P09.07	P00 special parameter	0	—	O	—	—	16bit	R/W	0x6207
P09.08	PR1 mode	0	—	O	—	—	16bit	R/W	0x6208
P09.09	PR1 position H	0	—	O	—	—	16bit	R/W	0x6209
P09.10	PR1 position(L)	0	—	O	—	—	16bit	R/W	0x620A
P09.11	PR1 velocity	60	—	O	—	—	16bit	R/W	0x620B
P09.12	PR1 acceleration time	100	—	O	—	—	16bit	R/W	0x620C
P09.13	PR1 deceleration time	100	—	O	—	—	16bit	R/W	0x620D
P09.14	PR1 pause time	0	—	O	—	—	16bit	R/W	0x620E
P09.15	PR1 special parameter	0	—	O	—	—	16bit	R/W	0x620F
P09.16	PR2 mode	0	—	O	—	—	16bit	R/W	0x6210
P09.17	PR2 position H	0	—	O	—	—	16bit	R/W	0x6211
P09.18	PR2 position(L)	0	—	O	—	—	16bit	R/W	0x6212
P09.19	PR2 velocity	60		O	—	—	16bit	R/W	0x6213
P09.20	PR2 acceleration time	100	—	O	—	—	16bit	R/W	0x6214
P09.21	PR2 deceleration time	100	—	O	—	—	16bit	R/W	0x6215
P09.22	PR2 pause time	0	—	O	—	—	16bit	R/W	0x6216
P09.23	PR2 special parameter	0	—	O	—	—	16bit	R/W	0x6217
P09.24	PR3 mode	0	—	O	—	—	16bit	R/W	0x6218
P09.25	PR3 position H	0	—	O	—	—	16bit	R/W	0x6219
P09.26	PR3 position(L)	0	—	O	—	—	16bit	R/W	0x621A
P09.27	PR3 velocity	60	—	O	—	—	16bit	R/W	0x621B
P09.28	PR3 acceleration time	100	—	O	—	—	16bit	R/W	0x621C
P09.29	PR3 deceleration time	100	—	O	—	—	16bit	R/W	0x621D
P09.30	PR3 pause time	0	—	O	—	—	16bit	R/W	0x621E
P09.31	PR3 special parameter	0	—	O	—	—	16bit	R/W	0x621F
P09.32	PR4 mode	0	—	O	—	—	16bit	R/W	0x6220
P09.33	PR4 position H	0	—	O	—	—	16bit	R/W	0x6221
P09.34	PR4 position(L)	0	—	O	—	—	16bit	R/W	0x6222
P09.35	PR4 velocity	60		O	—	—	16bit	R/W	0x6223
P09.36	PR4 acceleration time	100	—	O	—	—	16bit	R/W	0x6224
P09.37	PR4 deceleration time	100	—	O	—	—	16bit	R/W	0x6225

Code	Label	Default	Activation	Valid mode			Communication mode		
				PR	S	T	Byte	Op.	485 Addr.
P09.38	PR4 pause time	0	—	O	—	—	16bit	R/W	0x6226
P09.39	PR4 special parameter	0	—	O	—	—	16bit	R/W	0x6227
P09.40	PR5 mode	0	—	O	—	—	16bit	R/W	0x6228
P09.41	PR5 position H	0	—	O	—	—	16bit	R/W	0x6229
P09.42	PR5 position(L)	0	—	O	—	—	16bit	R/W	0x622A
P09.43	PR5 velocity	60	—	O	—	—	16bit	R/W	0x622B
P09.44	PR5 acceleration time	100	—	O	—	—	16bit	R/W	0x622C
P09.45	PR5 deceleration time	100	—	O	—	—	16bit	R/W	0x622D
P09.46	PR5 pause time	0	—	O	—	—	16bit	R/W	0x622E
P09.47	PR5 special parameter	0	—	O	—	—	16bit	R	0x622F
P09.48	PR6 mode	0	—	O	—	—	16bit	R/W	0x6230
P09.49	PR6 position H	0	—	O	—	—	16bit	R/W	0x6231
P09.50	PR6 position(L)	0	—	O	—	—	16bit	R/W	0x6232
P09.51	PR6 velocity	60		O	—	—	16bit	R/W	0x6233
P09.52	PR6 acceleration time	100	—	O	—	—	16bit	R/W	0x6234
P09.53	PR6 deceleration time	100	—	O	—	—	16bit	R/W	0x6235
P09.54	PR6 pause time	0	—	O	—	—	16bit	R/W	0x6236
P09.55	PR6 special parameter	0	—	O	—	—	16bit	R/W	0x6237
P09.56	PR7 mode	0	—	O	—	—	16bit	R/W	0x6238
P09.57	PR7 position H	0	—	O	—	—	16bit	R/W	0x6239
P09.58	PR7 position(L)	0	—	O	—	—	16bit	R/W	0x623A
P09.59	PR7 velocity	60	—	O	—	—	16bit	R/W	0x623B
P09.60	PR7 acceleration time	100	—	O	—	—	16bit	R/W	0x623C
P09.61	PR7 deceleration time	100	—	O	—	—	16bit	R/W	0x623D
P09.62	PR7 pause time	0	—	O	—	—	16bit	R/W	0x623E
P09.63	PR7 special parameter	0	—	O	—	—	16bit	R/W	0x623F
P09.64	PR8 mode	0	—	O	—	—	16bit	R/W	0x6240
P09.65	PR8 position H	0	—	O	—	—	16bit	R/W	0x6241
P09.66	PR8 position(L)	0	—	O	—	—	16bit	R/W	0x6242
P09.67	PR8 velocity	60		O	—	—	16bit	R/W	0x6243
P09.68	PR8 acceleration time	100	—	O	—	—	16bit	R/W	0x6244
P09.69	PR8 deceleration time	100	—	O	—	—	16bit	R/W	0x6245
P09.70	PR8 pause time	0	—	O	—	—	16bit	R/W	0x6246
P09.71	PR8 special parameter	0	—	O	—	—	16bit	R/W	0x6247
P09.72	PR9 mode	0	—	O	—	—	16bit	R/W	0x6248
P09.73	PR9 position H	0	—	O	—	—	16bit	R/W	0x6249
P09.74	PR9 position(L)	0	—	O	—	—	16bit	R/W	0x624A
P09.75	PR9 velocity	60	—	O	—	—	16bit	R/W	0x624B
P09.76	PR9 acceleration time	100	—	O	—	—	16bit	R/W	0x624C
P09.77	PR9 deceleration time	100	—	O	—	—	16bit	R/W	0x624D
P09.78	PR9 pause time	0	—	O	—	—	16bit	R/W	0x624E
P09.79	PR9 special parameter	0	—	O	—	—	16bit	R/W	0x624F
P09.80	PR10 mode	0	—	O	—	—	16bit	R/W	0x6250
P09.81	PR10 position H	0	—	O	—	—	16bit	R/W	0x6251
P09.82	PR10 position(L)	0	—	O	—	—	16bit	R/W	0x6252
P09.83	PR10 velocity	60		O	—	—	16bit	R/W	0x6253
P09.84	PR10 acceleration time	100	—	O	—	—	16bit	R/W	0x6254
P09.85	PR10 deceleration time	100	—	O	—	—	16bit	R/W	0x6255
P09.86	PR10 pause time	0	—	O	—	—	16bit	R/W	0x6256
P09.87	PR10 special parameter	0	—	O	—	—	16bit	R/W	0x6257
P09.88	PR11 mode	0	—	O	—	—	16bit	R/W	0x6258
P09.89	PR11 position H	0	—	O	—	—	16bit	R/W	0x6259
P09.90	PR11 position(L)	0	—	O	—	—	16bit	R/W	0x625A
P09.91	PR11 velocity	60	—	O	—	—	16bit	R/W	0x625B
P09.92	PR11 acceleration time	100	—	O	—	—	16bit	R/W	0x625C
P09.93	PR11 deceleration time	100	—	O	—	—	16bit	R/W	0x625D
P09.94	PR11 pause time	0	—	O	—	—	16bit	R/W	0x625E
P09.95	PR11 special parameter	0	—	O	—	—	16bit	R/W	0x625F
P09.96	PR12 mode	0	—	O	—	—	16bit	R/W	0x6260
P09.97	PR12 position H	0	—	O	—	—	16bit	R/W	0x6261
P09.98	PR12 position(L)	0	—	O	—	—	16bit	R/W	0x6262

Code	Label	Default	Activation	Valid mode			Communication mode		
				PR	S	T	Byte	Op.	485 Addr.
P09.99	PR12 velocity	60		O	—	—	16bit	R/W	0x6263
P09.100	PR12 acceleration time	100	—	O	—	—	16bit	R/W	0x6264
P09.101	PR12 deceleration time	100	—	O	—	—	16bit	R/W	0x6265
P09.102	PR12 pause time	0	—	O	—	—	16bit	R/W	0x6266
P09.103	PR12 special parameter	0	—	O	—	—	16bit	R/W	0x6267
P09.104	PR13 mode	0	—	O	—	—	16bit	R/W	0x6268
P09.105	PR13 position H	0	—	O	—	—	16bit	R/W	0x6269
P09.106	PR13 position(L)	0	—	O	—	—	16bit	R/W	0x626A
P09.107	PR13 velocity	60	—	O	—	—	16bit	R/W	0x626B
P09.108	PR13 acceleration time	100	—	O	—	—	16bit	R/W	0x626C
P09.109	PR13 deceleration time	100	—	O	—	—	16bit	R/W	0x626D
P09.110	PR13 pause time	0	—	O	—	—	16bit	R/W	0x626E
P09.111	PR13 special parameter	0	—	O	—	—	16bit	R/W	0x626F
P09.112	PR14 mode	0	—	O	—	—	16bit	R/W	0x6270
P09.113	PR14 position H	0	—	O	—	—	16bit	R/W	0x6271
P09.114	PR14 position(L)	0	—	O	—	—	16bit	R/W	0x6272
P09.115	PR14 velocity	60		O	—	—	16bit	R/W	0x6273
P09.116	PR14 acceleration time	100	—	O	—	—	16bit	R/W	0x6274
P09.117	PR14 deceleration time	100	—	O	—	—	16bit	R/W	0x6275
P09.118	PR14 pause time	0	—	O	—	—	16bit	R/W	0x6276
P09.119	PR14 special parameter	0	—	O	—	—	16bit	R/W	0x6277
P09.120	PR15 mode	0	—	O	—	—	16bit	R/W	0x6278
P09.121	PR15 position H	0	—	O	—	—	16bit	R/W	0x6279
P09.122	PR15 position(L)	0	—	O	—	—	16bit	R/W	0x627A
P09.123	PR15 velocity	60	—	O	—	—	16bit	R/W	0x627B
P09.124	PR15 acceleration time	100	—	O	—	—	16bit	R/W	0x627C
P09.125	PR15 deceleration time	100	—	O	—	—	16bit	R/W	0x627D
P09.126	PR15 pause time	0	—	O	—	—	16bit	R/W	0x627E
P09.127	PR15 special parameter	0	—	O	—	—	16bit	R/W	0x627F

[Class C] Position Comparison

Code	Label	Default	Activation	Valid mode			Communication mode		
				P	S	T	Byte	Op.	485 Addr.
P0C.00	Enable Position Comparison	0	—	O	O	O	16bit	R/W	0x2C01
P0C.01	Position Comparison Mode	0	—	O	O	O	16bit	R/W	0x2C03
P0C.02	Position Comparison Pulse Output Bandwidth	0	—	O	O	O	16bit	R/W	0x2C05
P0C.03	Position Comparison Output Delay	0	—	O	O	O	16bit	R/W	0x2C07
P0C.04	Position Comparison Starting Point	1	—	O	O	O	16bit	R/W	0x2C09
P0C.05	Position Comparison End Point	2	—	O	O	O	16bit	R/W	0x2C0B
P0C.06	No. of cycle for N-cycle Comparison	1	—	O	O	O	16bit	R/W	0x2C0D
P0C.07	Position Comparison - Set Current Position as Origin	1	—	O	O	O	16bit	R/W	0x2C0F
P0C.08	Position Comparison - Offset to Origin	1	—	O	O	O	16bit	R/W	0x2C11
P0C.20~61	Position Comparison 1~42 Target Value	0	—	O	O	O	16bit	R/W	0x2C28~0x2C7B
P0C.70	Position Comparison 1 & 2 Attribute Value	0	—	O	O	O	16bit	R/W	H:0x2C8C L:0x2C8D

[Class D] Gantry Settings

Code	Label	Default	Activation	Valid mode			Communication mode		
				P	S	T	Byte	Op.	485 Addr.
P0D.00	Gantry Configuration	0	O	O	—	—	16bit	R/W	0x2D01
P0D.01	Gantry Slave Axis Command Mode	0	—	O	—	—	16bit	R/W	0x2D03
P0D.02	Gantry Tuning Gain 1	100	—	O	—	—	16bit	R/W	0x2D05
P0D.03	Gantry Position Synchronization Deviation Threshold	10000	—	O	—	—	16bit	R/W	0x2D07
P0D.04	Gantry Torque Deviation Threshold	500	—	O	—	—	16bit	R/W	0x2D09
P0D.05	Gantry Tuning Gain 2	0	—	O	—	—	16bit	R/W	0x2D0B
P0D.06	Position Gain	0	—	O	—	—	16bit	R/W	0x2D0D
P0D.07	Velocity Gain	0	—	O	—	—	16bit	R/W	0x2D0F
P0D.08	Velocity Integral	0	—	O	—	—	16bit	R/W	0x2D11
P0D.09	Torque Balance Controller Enables Torque Threshold	0	—	O	—	—	16bit	R/W	0x2D13
P0D.10	Homing Method	0	—	O	—	—	16bit	R/W	0x2D15
P0D.11	Alignment Mode	0	—	O	—	—	32bit	R/W	0x2D16~ 0x2D17

Parameters Description

[Class 0] Basic Settings

P00.00	Label	Model-following/Zero tracking control			Valid mode(s)	P		
	Range	0-2000	Unit	0.1Hz	Default	1		
	Byte length	16bit	Attribute	R/W	485 address	0x0001		
	Valid	At stop						

Model-following bandwidth, also known as model-following control (MFC), is used to control the position loop to improve responsiveness to commands, speed up positioning time and reduce following errors. The effect is obvious, especially in low and medium mechanical stiffness.

Value	Description
0	Disable model following/zero tracking control
1	Set bandwidth automatically
2~9	Reserved
10~2000	Manually set control bandwidth. 30~100 recommended for belt application

P00.01	Label	Control Mode Settings			Valid mode(s)	P	S	T
	Range	0~10	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0003		
	Valid	After restart						

Value	Description	
	1st mode	2nd mode
【0】	Position	—
1	Velocity	—
2	Torque	—
3	Position	Velocity
4	Position	Torque
5	Velocity	Torque
6	PR internal command control	Position P00.22=0
		Velocity P00.22=1
		Torque P00.22=2
7~10	Reserved	

◆When 3, 4, 5, 6 combination hybrid mode, 1st and 2nd mode can be chosen accordingly with control mode switching input (C-MODE).
C-MODE: Invalid, select 1st mode.
C-MODE: Valid, select 2nd mode.
Please allow some time in between mode switching commands.
◆Please set P00.01 = 6 to switch to other modes from PR mode, then set 2nd mode using P00.22.

C-MODE is defaulted to Normally Open

P00.02	Label	Real time Auto Gain Adjusting			Valid mode(s)	P	S	T
	Range	0x0~0xFFF	Unit	—	Default	0x1		
	Byte length	16bit	Attribute	R/W	485 address	0x0005		
	Valid	Immediate						

Data bits	Category	Settings	Application
0x00_	Motion setting mode	Used to set motion setting mode, which can be selected according to the motion characteristics or setting requirements. Generally, it is recommended to select mode 1 with good generality when there is no special requirement, mode 2 when rapid positioning is needed If mode 1 and mode 2 cannot meet the requirements, please choose mode 0.	
		0: Manual	P00.03 invalid. Gain value must be adjusted manually and accordingly.
		1: Standard	P00.03 valid. Quick gain adjusting can be achieved by changing P00.03 stiffness value. Gain switching is not used in this mode, suitable for applications with requirements for stability.
		2: Positioning	P00.03 valid. Quick gain adjusting can be achieved by changing P00.03 stiffness value. This mode is suitable for applications requiring quick positioning. Not recommended for load mounted vertically to ground, or please compensate for the load using P06.07
0x0_0	Load type setting	Used to select the load type, choose according to load-inertia ratio and mechanical structure.	
		0: Rigid structure	This mode prioritizes system responsiveness. Use this mode when there is a relatively rigid structure with low load inertia. Typical application including directly connected high-precision gearbox, lead screw, gears, etc.
		1: High inertia	For applications with higher load inertia (10 times or above), gain settings take into account both machine stability and responsiveness. Not recommended to set stiffness above 15 for high load inertia.
		2: Flexible structure	This mode prioritizes system stability. Use this mode when there is low rigidity structure with high load inertia. Typical applications included belts and chains.
0x_00	reserved		

The setting type combination is a hexadecimal standard, as follows:

Setting type combination	Application type
0X000	Rigid structure + Manual
0X001	Rigid structure +Standard
0X002	Rigid structure +Positioning
0X010	High inertia + Manual
0X011	High inertia + Standard
0X012	High inertia + Positioning
0X020	Flexible structure + Manual
0X021	Flexible structure +Standard
0X022	Flexible structure +Positioning

P00.03	Label	Real time auto stiffness adjusting			Valid mode(s)	P	S	T
	Range	0 ~ 31	Unit	—	Default	11		
	Byte length	16bit	Attribute	R/W	485 address	0x0007		
	Valid	Immediate						

Low ⟶ Mechanical stiffness ⟶ High

Low ⟶ Servo gain ⟶ High

81.80·····70.69.68·····51.50

Low ⟶ Responsiveness ⟶ High

Lower values ensure better system responsiveness and mechanical stiffness, but machine vibration might occur, please set accordingly. Recommend setting up around 15 with motor with high inertia.

P00.04	Label	Inertia ratio			Valid mode(s)	P	S	T
	Range	0~20000	Unit	%	Default	250		
	Byte length	16bit	Attribute	R/W	485 address	0x0009		
	Valid	Immediate						

P00.04=(load inertia/motor rotational inertia) × 100%

Set inertia ratio according to actual load inertia. When both are uniform, actual motor velocity loop responsiveness and gain settings will be consistent. If inertia ratio is greater than actual value, velocity loop gain settings will be higher and vice versa.
For motors with high inertia, P00.04 can be left unfilled but optimal setting of P00.04 could improve system performance

P00.05	Label	Command pulse input selection			Valid mode(s)	P		
	Range	0~1	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x000B		
	Valid	After restart						

Value	Description
[0]	Pulse input low speed channel (200/500kHz pulse input)
1	Pulse input high speed channel (4MHz pulse input)









Both channels cannot be used at the same time.

P00.06	Label	Command pulse polarity inversion			Valid mode(s)	P		
	Range	0~1	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x000D		
	Valid	After restart						

P00.06 and P00.07 set command pulse input inversion and mode correspondingly.

P00.07	Label	Command pulse input mode			Valid mode(s)	P		
	Range	0~3	Unit	—	Default	3		
	Byte length	16bit	Attribute	R/W	485 address	0x000F		
	Valid	After restart						

Command pulse input

Command Polarity inversion (P00.06)	Command pulse input mode settings (P00.07)	Command Pulse Mode	Positive signal	Negative signal
[0]	0 *or* 2	90°phase difference 2 phase pulse （Phase A+ Phase B）		
	1	CW pulse sequence ＋ CCW pulse sequence		
	[3]	Pulse sequence ＋ Directional symbol		
1	0 *or* 2	90°phase difference 2 phase pulse （Phase A＋Phase B）		
	1	CW pulse sequence ＋ CCW pulse sequence		
	3	Pulse sequence ＋ Directional symbol		

Command pulse input signal max. frequency and min. duration needed

Command pulse input interface		Max. Frequency	Min. duration needed (μs)					
			t1	t2	t3	t4	t5	t6
Pulse sequence interface	Differential drive	500 kHz	2	1	1	1	1	1
	Open collector	200 kHz	5	2.5	2.5	2.5	2.5	2.5
	High speed differential drive	4Mhz	0.25	0.125	0.125	0.125	0.125	0.125

Please set >0.1μs for the duration between rising and falling edge of command pulse input signal.
1 revolution with 2500 pulses 2-phase pulse input when P00.07=0 or 2, P00.08 = 10000.
1 revolution with 10000 pulses 1-phase pulse input when P00.07=1 or 3, P00.08 = 10000.

P00.08	Label	1st command pulse count per revolution			Valid mode(s)	P	S	T
	Range	0-67100864	Unit	PULSE	Default	10000		
	Byte length	32bit	Attribute	R/W	485 address	H: 0x0010 L: 0x0011		
	Valid	After restart						

Control will affect if value set is too low. Err1b1 might occur if value < 500.
(1) P00.08 valid when ≠ 0: Motor revolution = input pulse count / [P00.08 value]
(2) P00.08 invalid when = 0: P00.09 and P00.10 valid.

P00.09	Label	1st command frequency divider/multiplier numerator			Valid mode(s)	P		
	Range	1~2147483647	Unit	—	Default	1		
	Byte length	32bit	Attribute	R/W	485 address	H: 0x0012 L: 0x0013		
	Valid	After restart						

Valid when P00.08 = 0, please refer to description in P00.10.

P00.10	Label	1st command frequency divider/multiplier denominator			Valid mode(s)	P		
	Range	1~2147483647	Unit	—	Default	1		
	Byte length	32bit	Attribute	R/W	485 address	H: 0x0014 L: 0x0015		
	Valid	After restart						

1. Settings：
(1) Driver command pulse input count: X
(2) Encoder pulse count after frequency divider/multiplier: Y
(3) Encoder pulse count per revolution: Z
(4) Motor revolution: W
2. Calculation：
（1）X, Y
Y = X * P00.09 / P00.10
Please keep the value of P00.09 and P00.10 to be smaller than 2^{24} (16777216).
（2）Z
Motor with 23-bit motor： Z= 2^{23} = 8388608
（3）Y, Z, W
W = Y / Z
Performance cannot be guaranteed if frequency divider/multiplier ratio is set to extreme values. Err1b1 might occur if W < 500.





P00.11	Label	Encoder output pulse count per revolution			Valid mode(s)	P	S	T
	Range	1~32767	Unit	P/r	Default	2500		
	Byte length	16bit	Attribute	R/W	485 address	0x0017		
	Valid	After restart						

If P00.11 = 1000, encoder differential output signal per revolution = 4000 pulses

P00.12	Label	Pulse output logic inversion			Valid mode(s)	P	S	T
	Range	0~1	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0019		
	Valid	After restart						

To set phase B logic and output source from encoder pulse output. To inverse B-Phase pulse logic and change the relation between Phase A and Phase B

Pulse output logic inversion

P00.12	Phase B logic	CCW direction	CW direction
[0]	Not inverted		
[1]	Inverted		

P00.13	Label	1st torque limit			Valid mode(s)	P	S	T
	Range	0~500	Unit	%	Default	350		
	Byte length	16bit	Attribute	R/W	485 address	0x001B		
	Valid	Immediate						

1st torque limit is set according to ratio percentage of motor rated current. Do not exceed max driver output current.

Please refer to P05.21 on how to set torque limit.

P00.14	Label	Excessive position deviation			Valid mode(s)	P		
	Range	0~310	Unit	0.1rev	Default	30		
	Byte length	16bit	Attribute	R/W	485 address	0x001D		
	Valid	Immediate						

Please set threshold value for position deviation accordingly. Default factory setting = 30, Er180 will be triggered if positive deviation is in excess of 3 revolutions.

P00.15	Label	Absolute encoder settings			Valid mode(s)	P	S	T
	Range	0~15	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x001F		
	Valid	After restart						

Value	Mode	Description
【0】	Incremental	Doesn't retain position data on power off. Unlimited travel distance.
1	Multiturn absolute linear	Retrain position data on power off. For applications with fixed travel distance and no multiturn data overflow.
2	Multiturn absolute rotary	Retrain position data on power off. Actual data feedback in between 0-(P06.63+1). Unlimited travel distance.
3	Single turn absolute	Used when travel distance is within 1 revolution of the encoder. Data overflow will trigger alarm.
5	Multi turn absolute	Clear multiturn alarm and activate multiturn absolute function. Will switch to multiturn mode once alarm cleared, if remains at 5 after 3s, please solve according to Er153.
9		Clear multiturn position, reset multiturn alarm and activate multiturn absolute function. Will switch to multiturn mode once alarm cleared, if remains at 9 after 3s, please solve according to Er153. Please disable axis before setting to 9 and home the axis before using.
Others		Do not use!

P00.16	Label	Regenerative resistance			Valid mode(s)	P	S	T
	Range	25~500	Unit	Ohm	Default	100		
	Byte length	16bit	Attribute	R/W	485 address	0x0021		
	Valid	Immediate						

To set resistance value of regenerative resistor
P00.16 and P00.17set value determine alarm threshold of Er120.
If set value > actual regenerative resistance, Er120 occurrence might be delayed.

P00.17	Label	Regenerative resistor power rating			Valid mode(s)	P	S	T
	Range	20~5000	Unit	W	Default	50		
	Byte length	16bit	Attribute	R/W	485 address	0x0023		
	Valid	Immediate						

To set power rating of regenerative resistor. Please refer to table below

Model	Internal resistance(Ω)	Internal resistor power rating(W)
E-DHAS□□P400F	100	50
E-DHAS□□P750F	50	75
E-DHAS□□P1000F	50	75

P00.16 and P00.17 determines the threshold value of Er120. Please set it accordingly or it might trigger false alarm or damage to servo driver.
Note: If external regenerative resistor is used, please set according to its labeled power rating.

P00.22	Label	PR and P/S/T switching			Valid mode(s)	P	S	T
	Range	0~2	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x002D		
	Valid	Immediate						

When P00.01 = 6(PR Mode), 2nd mode can be set on P00.22

P00.01	P00.22	Control mode
6	【0】	PR / Position
	1	PR / Velocity
	2	PR / Torque

P00.25	Label	Auxiliary function			Valid mode(s)	P	S	T
	Range	0~0xFFFF	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0033		
	Valid	Immediate						

Parameter	Auxiliary function
0x1111	Reset current alarm
0x1122	Reset record alarm
0x2211	Save parameter to EEPROM (not including PR)
0x2212	Save PR parameters
0x2222	Initialize parameter (not including motor parameters)
0x2233	All parameters restore to default
0x3322	Analog 2 self-learning zero point
0x3333	Analog 3 self-learning zero point
0X4001	JOG_P（once every 50ms）
0X4002	JOG_N（once every 50ms）
0x4411	Encoder auto correction to zero
0x6666	Software reset

Only for RS485 communication, please write corresponding parameters into P00.25
Do not use JOG_P and JOG_N in PR mode

P00.26	Label	Simulated I/O	Valid mode(s)	P	S	T

	Range	0~0xFFFF	**Unit**	-	**Default**	0
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0035
	Valid	Immediate				

Bit	Input
0	DI1
1	DI2
2	DI3
3	DI4
4	DI5
5	DI6
6	DI7
7	DI8
8	DI9
9	DI10

Only for RS485 communication. Simulated I/O is different from physical I/O which means inversion of current I/O status

P00.30								
	Label	Encoder feedback mode			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~1	**Unit**	-	**Default**	0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0037		
	Valid	Immediate						

To set encoder feedback source

Value	Description
【0】	Feedback from motor（Internal）encoder
1	Use under full closed loop control, external encoder feedback

P00.31								
	Label	External encoder type			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~3	**Unit**	-	**Default**	0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0039		
	Valid	After restart						

Value	Description
【0】	ABZ encoder
1~3	*Reserved for future upgrades.*

P00.32								
	Label	External encoder direction			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~1	**Unit**	-	**Default**	0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x003B		
	Valid	After restart						

Value	Description
【0】	Default direction
1	Inversed direction

P00.33								
	Label	Excessive hybrid deviation			**Valid mode(s)**	**P**		
	Range	0~13421 7728	**Unit**	Command unit	**Default**	16000		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0043		
	Valid	After restart						

To set the excessive hybrid deviation threshold value, please set accordingly. Use in full closed loop control. Factory default: 16000. Er180 might occur if position deviation during hybrid control exceeds 16000 pulse counts.
Er191 might occur if P00.33 set value is too low.

P00.34	**Label**	Clear excess hybrid control deviation	**Valid mode(s)**	**P**		

	Range	0~100	**Unit**	R	**Default**	0
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0045
	Valid	After restart				

To set condition to clear position deviation under hybrid control mode (Full closed loop)

Value	Description
【0】	OFF
1~100	Revolution counts to clear hybrid control deviation

P00.35	**Label**	External encoder frequency divider numerator			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~2^{23}	**Unit**	-	**Default**	0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0047		
	Valid	After restart						

To set frequency divider numerator for external encoder.

P00.36	**Label**	External encoder frequency divider denominator			**Valid mode(s)**	**P**	**S**	**T**
	Range	1~2^{23}	**Unit**	-	**Default**	10000		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0049		
	Valid	After restart						

To set frequency divider denominator for external encoder. When P00.37 = 0, External encoder feedback pulse count per revolution = P00.36.

P00.37	**Label**	External encoder feedback pulse count per revolution			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~2147483648	**Unit**	-	**Default**	0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x004B		
	Valid	After restart						

Value	Pulse count
【0】	P00.36
1~2^{31}	P00.37

P00.38	**Label**	Z-signal pulse input source			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~3	**Unit**	-	**Default**	0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x004D		
	Valid	Immediate						

Value	Bit 1 (Probe Z-signal)	Bit 0 (Homing Z-Signal)
【0】	Motor Z-signal	Motor Z-signal
1	Motor Z-signal	External encoder Z-signal
2	External encoder Z-signal	Motor Z-signal
3	External encoder Z-signal	External encoder Z-signal

P00.40 (Only for RS485)	Label	Mapping parameter 1			Valid mode(s)	P	S	T
	Range		Unit		Default	0		
	Byte length	32bit	Attribute		485 address	H： 0x0050		
	Valid					L： 0x0051		
For users to set parameters unrelated by RS485 address quickly. Mapping parameter ID to be written is set on P00.50 by RS485. Data saved in P00.40 is parameter designated by P00.50. Please refer to P00.57 for parameter settings. *Note: Range, unit and attribute of P00.40 is determined by P00.50 designated parameter.*								

P00.41 (Only for RS485)	Label	Mapping parameter 2			Valid mode(s)	P	S	T
	Range		Unit		Default	0		
	Byte length	32bit	Attribute		485 address	H: 0x0052		
	Valid					L: 0x0053		
Please refer to P00.40 for parameter description and P00.57 for parameter settings. *Note: Range, unit and attribute of P00.41 is determined by P00.51 designated parameter.*								

P00.42 (Only for RS485)	Label	Mapping parameter 3			Valid mode(s)	P	S	T
	Range		Unit		Default	0		
	Byte length	32bit	Attribute		485 address	H: 0x0054		
	Valid					L： 0x0055		
Please refer to P00.40 for parameter description and P00.57 for parameter settings. *Note: Range, unit and attribute of P00.42 is determined by P00.52 designated parameter.*								

P00.43 (Only for RS485)	Label	Mapping parameter 4			Valid mode(s)	P	S	T
	Range		Unit		Default	0		
	Byte length	32bit	Attribute		485 address	H： 0x0056		
	Valid					L： 0x0057		
Please refer to P00.40 for parameter description and P00.57 for parameter settings. *Note: Range, unit and attribute of P00.43 is determined by P00.53 designated parameter.*								

P00.44 (Only for RS485)	Label	Mapping parameter 5			Valid mode(s)	P	S	T
	Range		Unit		Default	0		
	Byte length	32bit	Attribute		485 address	H： 0x0058		
	Valid					L： 0x0059		
Please refer to P00.40 for parameter description and P00.57 for parameter settings. *Note: Range, unit and attribute of P00.44 is determined by P00.54 designated parameter.*								

P00.45 (Only for RS485)	Label	Mapping parameter 6			Valid mode(s)	P	S	T
	Range		Unit		Default	0		
	Byte length	32bit	Attribute		485 address	H： 0x005A		
	Valid					L： 0x005B		
Please refer to P00.40 for parameter description and P00.57 for parameter settings. *Note: Range, unit and attribute of P00.45 is determined by P00.55 designated parameter.*								

P00.46 (Only for RS485)	Label	Mapping parameter 7			Valid mode(s)	P	S	T
	Range		Unit		Default	0		
	Byte length	32bit	Attribute		485 address	H： 0x005C		
	Valid					L： 0x005D		
Please refer to P00.40 for parameter description and P00.57 for parameter settings. *Note: Range, unit and attribute of P00.46 is determined by P00.56 designated parameter.*								

P00.47 (Only for RS485)	Label	Mapping parameter 8			Valid mode(s)	P	S	T
	Range		Unit		Default	0		
	Byte length	32bit	Attribute		485 address	H： 0x005E		
	Valid					L： 0x005F		
Please refer to P00.40 for parameter description and P00.57 for parameter settings. *Note: Range, unit and attribute of P00.47 is determined by P00.57 designated parameter.*								

P00.50	Label	Mapping parameter 1 indicator	Valid mode(s)	P	S	T

(Only for RS485)	**Range**	0~0xFFFFFFFF	**Unit**		**Default**	0x00490049		
	Byte length	32bit	**Attribute**	R/W	**485 address**	H： 0x0064		
	Valid	Immediate				L： 0x0065		
P00.51 (Only for RS485)	**Label**	Mapping parameter 2 indicator			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~0xFFFFFFFF	**Unit**		**Default**	0x00490049		
	Byte length	32bit	**Attribute**	R/W	**485 address**	H： 0x0066		
	Valid	Immediate				L： 0x0067		
P00.52 (Only for RS485)	**Label**	Mapping parameter 3 indicator			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~0xFFFFFFFF	**Unit**		**Default**	0x00490049		
	Byte length	32bit	**Attribute**	R/W	**485 address**	H： 0x0068		
	Valid	Immediate				L： 0x0069		
P00.53 (Only for RS485)	**Label**	Mapping parameter 4 indicator			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~0xFFFFFFFF	**Unit**		**Default**	0x00490049		
	Byte length	32bit	**Attribute**	R/W	**485 address**	H: 0x006A		
	Valid	Immediate				L: 0x006B		
P00.54 (Only for RS485)	**Label**	Mapping parameter 5 indicator			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~0xFFFFFFFF	**Unit**		**Default**	0x00490049		
	Byte length	32bit	**Attribute**	R/W	**485 address**	H: 0x006C		
	Valid	Immediate				L: 0x006D		
P00.55 (Only for RS485)	**Label**	Mapping parameter 6 indicator			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~0xFFFFFFFF	**Unit**		**Default**	0x00490049		
	Byte length	32bit	**Attribute**	R/W	**485 address**	H: 0x006E		
	Valid	Immediate				L: 0x006F		
P00.56 (Only for RS485)	**Label**	Mapping parameter 7 indicator			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~0xFFFFFFFF	**Unit**		**Default**	0x00490049		
	Byte length	32bit	**Attribute**	R/W	**485 address**	H: 0x0070		
	Valid	Immediate				L: 0x0071		

P00.57 (Only for RS485)	Label	Mapping parameter 8 indicator			Valid mode(s)	P	S	T
	Range	0~0xFFFFFFFF	Unit		Default	0x00490049		
	Byte length	32bit	Attribute	R/W	485 address	H: 0x0072		
	Valid	Immediate				L: 0x0073		

Set parameter to 0xABCDWXYZ
High bit parameter position (PH) and low bit parameter position (PL)settings format：
0xABCD & 0xWXYZ

4-bit value	Definition	4-bit value	Definition
CD	Parameter bias decimal	YZ	Parameter bias decimal
B	Parameter type hexadecimal	X	Parameter type hexadecimal
A	Unused	W	Unused

Description of corresponding parameter using Mapping Parameter 1 as example:
Mapping content is 32-bit wide, able to map 2 16-bit or 1 32-bit parameters：

P00.50 content as below：
(Mapping parameter 1 indicator：P00.50；Mapping parameter 1: P00.40)
P00.40 high bit corresponds to P00.50 high bit indicator (PH) value;
P00.40 low bit corresponds to P00.50 low bit indicator (PL) value;

1. When P00.50 PH≠PL, indicates that P00.40 contains 2 16-bit mapped values.
If P00.50=0x06200101; PH=0x0620, PL=0x0101; write 0x0005 0064 into P00.40; write 0x0005 into P06.20, write 0x0064 into P01.01;

2. When P00.50 PH=PL, indicates that P00.40 contains 1 32-bit mapped value.
If P00.50=0x01150115; PH=0x0115, PL=0x0115; write 0x00000001into P00.40; write 0x00000001 into P01.15;

Note: When a 32-bit address parameter is mapped, please write same address into high and low bit as shown above.

[Class 1] Gain Adjustments

P01.00	Label	1st position loop gain			Valid mode(s)	P		
	Range	0～30000	Unit	0.1/s	Default	320		
	Byte length	16bit	Attribute	R/W	485 address	0x0101		
	Valid	Immediate						

Higher position loop gain value improves the responsiveness of the servo driver and lessens the positioning time.
Position loop gain value shouldn't exceed responsiveness of the mechanical system and take into consideration velocity loop gain, if not it might cause vibration, mechanical noise and overtravel.
As velocity loop gain is based on position loop gain, please set both values accordingly.
Recommended range: 1.2≤P01.00/P01.01≤1.8

P01.01	Label	1st velocity loop gain			Valid mode(s)	P	S	T
	Range	1～32767	Unit	0.1Hz	Default	180		
	Byte length	16bit	Attribute	R/W	485 address	0x0103		
	Valid	Immediate						

To determine the responsiveness of the velocity loop. If inertia ratio of P00.04 is uniform with actual inertia ratio, velocity loop responsiveness = P01.01.
To increase position loop, gain and improve responsiveness of the whole system, velocity loop gain must be set at higher value. Please note that if the velocity loop gain is too high, it might cause vibration.

P01.02	Label	1st Integral Time Constant of Velocity Loop			Valid mode(s)	P	S	T
	Range	1～10000	Unit	0.1ms	Default	310		
	Byte length	16bit	Attribute	R/W	485 address	0x0105		
	Valid	Immediate						

The lower the set value, the closer the lag error at stop to 0 but might cause vibration. If the value set is overly large, overshoot, delay of positioning time duration and lowered responsiveness might occur.
Set 10000 to deactivate P01.02.

P01.03	Label	1st velocity detection filter			Valid mode(s)	P	S	T
	Range	0～31	Unit	—	Default	15		
	Byte length	16bit	Attribute	R/W	485 address	0x0107		
	Valid	Immediate						

This filter is a low pass filter. It blocks high frequencies which cause system instability from velocity feedback data. The higher the set value, lower frequencies will be blocked, and velocity responsiveness will also be lowered. P01.03 needs to match velocity loop gain. Please refer to the following table.

Value	Velocity Detection Filter Cut-off Frequency (Hz)	Value	Velocity Detection Filter Cut-off Frequency (Hz)
0	2500	16	750
1	2250	17	700
2	2100	18	650
3	2000	19	600
4	1800	20	550
5	1600	21	500
6	1500	22	450
7	1400	23	400
8	1300	24	350
9	1200	25	300
10	1100	26	250
11	1000	27	200
12	950	28	175
13	900	29	150
14	850	30	125
【15】	800	31	100

P01.04	Label	1st Torque Filter Time Constant			Valid mode(s)	P	S	T
	Range	0～2500	Unit	0.01ms	Default	126		
	Byte length	16bit	Attribute	R/W	485 address	0x0109		
	Valid	Immediate						

To set torque command low-pass filter, add a filter delay time constant to torque command and filter out the high frequencies in the command.
Often used to reduce or eliminate some noise or vibration during motor operation, but it will reduce the responsiveness of current loop, resulting in undermining velocity loop and position loop control. P01.04 needs to match velocity loop gain.
Recommended range: $1{,}000{,}000/(2\pi \times P01.04) \geq P01.01 \times 4$

For example: Velocity loop gain P01.01=180(0.1Hz) which is 18Hz. Time constant of torque filter should be P01.01≤221(0.01ms)
If mechanical vibration is due to servo driver, adjusting P01.04 might eliminate the vibration. The smaller the value, the better the responsiveness but also subject to machine conditions. If the value is too large, it might lower the responsiveness of current loop.
With higher P01.01 value settings and no resonance, reduce P01.04 value;
With lower P01.01 value settings, increase P01.04 value to lower motor noise.

P01.05	**Label**	2nd Position Loop Gain			**Valid mode(s)**	**P**		
	Range	0～30000	**Unit**	0.1/s	**Default**	380		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x010B		
	Valid	Immediate						
P01.06	**Label**	2nd velocity loop gain			**Valid mode(s)**	**P**	**S**	**T**
	Range	1～32767	**Unit**	0.1Hz	**Default**	180		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x010D		
	Valid	Immediate						
P01.07	**Label**	2nd Integral Time Constant of Velocity Loop			**Valid mode(s)**	**P**	**S**	**T**
	Range	1～10000	**Unit**	0.1ms	**Default**	10000		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x010F		
	Valid	Immediate						
P01.08	**Label**	2nd velocity detection filter			**Valid mode(s)**	**P**	**S**	**T**
	Range	0～31	**Unit**	—	**Default**	15		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0111		
	Valid	Immediate						
P01.09	**Label**	2nd Torque Filter Time Constant			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~2500	**Unit**	0.01ms	**Default**	126		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0113		
	Valid	Immediate						
	Position loop, velocity loop, velocity detection filter, torque command filter each have 2 pairs of gain or time constant (1st and 2nd).							
P01.10	**Label**	Velocity feed forward gain			**Valid mode(s)**	**P**		
	Range	0~1000	**Unit**	0.10%	**Default**	300		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0115		
	Valid	Immediate						
	Used for decreasing following error caused by low responsiveness of velocity loop. Might cause overshoot or increase in noise if set value is too high.							

P01.11	**Label**	Velocity feed forward filter time constant			**Valid mode(s)**	**P**		
	Range	0~6400	**Unit**	0.01ms	**Default**	50		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0117		
	Valid	Immediate						

Set velocity feed forward low pass filter to eliminate high or abnormal frequencies in velocity feed forward command. Often used when position command with low resolution or high electronic gear ration to smoothen velocity feed forward.
Position deviation under constant velocity can be lowered with higher velocity feed forward gain. Please refer to the equation below.
Reduce P01.11 value to suppress velocity overshoot during deceleration; Increase P01.11 value to suppress noise or vibration due to long driver control cycle or position command uneven pulse frequency.

<Application>
Set P01.11 = 50（0.5ms）, improve feedforward effect by gradually increasing P01.10.
The equation below can be used to determine the position deviation due to velocity feedforward gain under constant velocity.

Position deviation [Unit]= $\frac{Set\ velocity[\frac{Uint}{s}]}{Position\ loop\ gain[Hz]} x \frac{100 - Velocity\ feed\ foward\ gain[\%]}{100}$

P01.12	Label	Torque feed forward gain			Valid mode(s)	P	S
	Range	0~1000	Unit	0.1%	Default	0	
	Byte length	16bit	Attribute	R/W	485 address	0x0119	
	Valid	Immediate					
	Before using torque feed forward, please set correct inertia ratio P00.04. By increasing torque feed forward gain, position deviation on constant acceleration/deceleration can be reduced to close to 0. Under ideal condition and trapezoidal speed profile, position deviation of the whole motion can be reduced to close to 0. In reality, perturbation torque will always exist, hence position deviation can never be 0.						
P01.13	Label	Torque feed forward filter time constant			Valid mode(s)	P	S
	Range	0~6400	Unit	0.01ms	Default	0	
	Byte length	16bit	Attribute	R/W	485 address	0x011B	
	Valid	Immediate					
	Low pass filter to eliminate abnormal or high frequencies in torque feed forward command. Usually used when encoder has lower resolution or precision. Noise reduces if torque feed forward filter time constant is set higher, but position deviation will increase at acceleration varied points. **<Application>** ・ Set P01.13 = 50ms, please increase torque forward gain gradually to enable torque feedforward. ・By increasing P01.13, noise will reduce but position deviation will become larger.						

P01.15	Label	Position control gain switching mode			Valid mode(s)	P		
	Range	0～10	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x011F		
	Valid	Immediate						

In position control, set the conditions for gain switching to be valid.

Value	Condition	Gain switching condition
【0】	1st gain fixed	Fixed on using 1st gain (P01.00-P01.04)
1	2nd gain fixed	Fixed on using 2nd gain (P01.05-P01.09)
2	Gain switching input valid	· Gain switching input （GAIN）invalid: 1st gain. · Gain switching input （GAIN）valid: 2nd gain. **Default: 1st gain*
3	High command torque	Switch to 2nd gain when set torque command absolute value larger than (level + hysteresis) [%] Switch to 1st gain when set torque command absolute value smaller than (level + hysteresis) [%]
4-9	Reserved	Reserved
10	Pending position command +actual velocity	Valid for position control. Switch to 2nd gain if position command ≠ 0 Switch to 1st gain if positional command = 0 throughout the duration of delay time and absolute value of actual velocity remains smaller than (level - hysteresis) (r/min)

*** Above 'level' and 'hysteresis' are in correspondence to P01.17 Position control gain switching level and P01.18 Hysteresis at position control switching.*

P01.17	Label	Position control gain switching level			Valid mode(s)	P		
	Range	0~20000	Unit	Mode dependent	Default	50		
	Byte length	16bit	Attribute	R/W	485 address	0x0123		
	Valid	Immediate						

Set threshold value for gain switching to occur.
Unit is mode dependent.

Switching condition	Unit
Position	Encoder pulse count
Velocity	RPM
Torque	%


Please set level ≥ hysteresis

P01.18	Label	Hysteresis at position control switching			Valid mode(s)	P		
	Range	0~20000	Unit	Mode dependent	Default	33		
	Byte length	16bit	Attribute	R/W	485 address	0x0125		
	Valid	Immediate						

To eliminate the instability of gain switching. Used in combination with P01.17 using the same unit.
If level< hysteresis, drive will set internally hysteresis = level.

P01.19	Label	Position control switching time			Valid mode(s)	P		
	Range	0~10000	Unit	0.1ms	Default	33		
	Byte length	16bit	Attribute	R/W	485 address	0x0127		
	Valid	Immediate						

During position control, if 1st and 2nd gain difference is too large, to ease torque changes and vibration due to rapid changes in position loop gain, set suitable P01.19 value
For example: 1st (P01.00) <-> 2nd (P01.05)

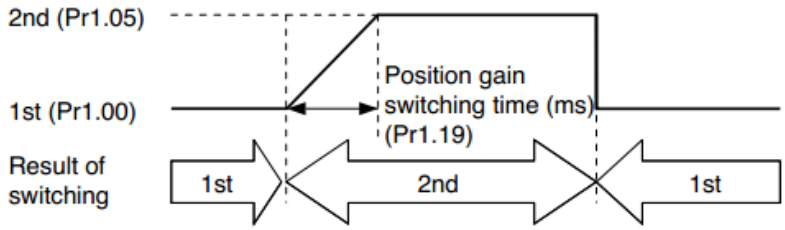

P01.35	Label	Position command pulse filter time			Valid mode(s)	P		
	Range	0~200	Unit	0.01us	Default	8		
	Byte length	16bit	Attribute	R/W	485 address	0x0147		
	Valid	After restart						

To filter position setting pulse, getting rid of narrow pulse frequency with interference. Low-speed pulse input unit: 0.05us; High-speed pulse input unit: 0.01us.
If set value is overly large, it will affect the receiving of high frequency command pulse and with high delay time.
P01.35 formula：

$$\text{Filter frequency} = \frac{1}{2 \times \text{P01.35} \times 0.05\text{us}} \times 1000000\text{Hz}$$

Example：P01.35=100, pulse frequency > 100KHz will be filtered;

P01.35	Filter frequency	P01.35	Filter frequency
0	*Null*	100	100kHz(500KHz)
8	1.25MHz(6.25MHz)	125	80kHz(400KHz)
10	1MHz（5MHz）	160	62.5kHz(312KHz)
20	500kHz(2.5MHz)	200	50kHz(250KHz)
50	200kHz(1MHz)		
80	125kHz(625KHz)		

P01.36	Label	External ABZ encoder filter time			Valid mode(s)	P full closed loop
	Range	0~300	Unit	0.01us	Default	3
	Byte length	16bit	Attribute	R/W	485 address	0x0149
	Valid	After restart				

To set filter time for external ABZ encoder

P01.39	Label	Special function register 2			Valid mode(s)	P	T	S
	Range	0~0xFFFF	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x014F		
	Valid	Immediate						

Value	Description
【0】	Reserved
1	=1, activate full closed loop during trial run
2	=1, hybrid position deviation clearing

[Class 2] Vibration Suppression

P02.00	Label	Adaptive filtering mode settings			Valid mode(s)	P	S	
	Range	0~4	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0201		
	Valid	Immediate						

Value	Description	
0	Adaptive filter: invalid	Parameters related to 3rd notch filter remain unchanged
1	Adaptive filter: 1 filter valid for once.	1 adaptive filter becomes valid. 3rd notch filter related parameters updated accordingly. P02.00 switches automatically to 0 once updated.
2	Adaptive filter: 1 filter remains valid	1 adaptive filter becomes valid. 3rd notch filter related parameters will keep updating accordingly.
3-4	Reserved	-

P02.01	Label	1st notch frequency			Valid mode(s)	P	S	T
	Range	50~4000	Unit	Hz	Default	4000		
	Byte length	16bit	Attribute	R/W	485 address	0x0203		
	Valid	Immediate						
Set center frequency of 1st torque command notch filter. Set P02.01 to 4000 to deactivate notch filter								
P02.02	Label	1st notch width			Valid mode(s)	P	S	T
	Range	0~20	Unit	—	Default	4		
	Byte length	16bit	Attribute	R/W	485 address	0x0205		
	Valid	Immediate						
Set notch bandwidth for 1st resonant notch filter. Under normal circumstances, please use factory default settings. If resonance is under control, in combination with P02.01 and P02.03, P02.02 can be reduced to improve current loop responsiveness which allows higher mechanical stiffness settings								
P02.03	Label	1st notch depth			Valid mode(s)	P	S	T
	Range	0~99	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0207		
	Valid	Immediate						
Set notch depth for 1st resonant notch filter. Under normal circumstances, please use factory default settings. If resonance is under control, in combination with P02.01 and P02.02, P02.03 can be reduced to improve current loop responsiveness which allows higher mechanical stiffness settings								


P02.04	Label	2nd notch frequency			Valid mode(s)	P	S	T
	Range	50~4000	Unit	Hz	Default	4000		
	Byte length	16bit	Attribute	R/W	485 address	0x0209		
	Valid	Immediate						
Set center frequency of 2nd torque command notch filter. Set P02.04 to 4000 to deactivate notch filter								
P02.05	Label	2nd notch width			Valid mode(s)	P	S	T
	Range	0~20	Unit	—	Default	4		
	Byte length	16bit	Attribute	R/W	485 address	0x020B		
	Valid	Immediate						
Set notch bandwidth for 2nd resonant notch filter. Under normal circumstances, please use factory default settings. If resonance is under control, in combination with P02.04 and P02.06, P02.05 can be reduced to improve current loop responsiveness which allows higher mechanical stiffness settings.								
P02.06	Label	2nd notch depth			Valid mode(s)	P	S	T
	Range	0~99	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x020D		
	Valid	Immediate						
Set notch depth for 1st resonant notch filter. When P02.06 value is higher, notch depth becomes shallow, phase lag reduces. Under normal circumstances, please use factory default settings. If resonance is under control, in combination with P02.04 and P02.05, P02.06 can be reduced to improve current loop responsiveness which allows higher mechanical stiffness settings.								
P02.07	Label	3rd notch frequency			Valid mode(s)	P	S	T
	Range	50~4000	Unit	Hz	Default	4000		
	Byte length	16bit	Attribute	R/W	485 address	0x020F		
	Valid	Immediate						
Set center frequency of 3rd torque command notch filter. Set P02.07 to 4000 to deactivate notch filter								

P02.08	Label	3rd notch width			Valid mode(s)	P	S	T
	Range	0~20	Unit	—	Default	4		
	Byte length	16bit	Attribute	R/W	485 address	0x0211		
	Valid	Immediate						
Set notch depth for 3rd resonant notch filter. When P02.06 value is higher, notch depth becomes shallow, phase lag reduces. Under normal circumstances, please use factory default settings. If resonance is under control, in combination with P02.04 and P02.05, P02.06 can be reduced to improve current loop responsiveness which allows higher mechanical stiffness settings.								
P02.09	Label	3rd notch depth			Valid mode(s)	P	S	T
	Range	0~99	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0213		
	Valid	Immediate						
Set notch depth for 3rd resonant notch filter. When P02.06 value is higher, notch depth becomes shallow, phase lag reduces. Under normal circumstances, please use factory default settings. If resonance is under control, in combination with P02.04 and P02.05, P02.06 can be reduced to improve current loop responsiveness which allows higher mechanical stiffness settings.								

P02.14	Label	1st damping frequency			Valid mode(s)	P		
	Range	0/10~2000	Unit	0.1Hz	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x021D		
	Valid	Immediate						
Set P02.16 to 0 to deactivate this parameter. To suppress wobble at load end. Often used when wobbling flexible structure due to high deceleration upon stopping. Especially effective for wobbling with frequencies under 100Hz. Set P02.15 to wobble frequency (wobble frequency can be determined using tracing function of EDrive)								
P02.16	Label	2nd damping frequency			Valid mode(s)	P		
	Range	0/10~2000	Unit	0.1Hz	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0221		
	Valid	Immediate						
Set P02.16 to 0 to deactivate this parameter. To suppress wobble at load end. Often used when wobbling flexible structure due to high deceleration upon stopping. Especially effective for wobbling with frequencies under 100Hz. Set P02.16 to wobble frequency (wobble frequency can be determined using tracing function of EDrive)								

P02.22	Label	Position command smoothing filter			Valid mode(s)	P		
	Range	0~32767	Unit	0.1ms	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x022D		
	Valid	At stop						


To set time constant of 1 time delay filter of position command.
To set time constant of 1 time delay filter, according to target velocity Vc square wave command as shown below.

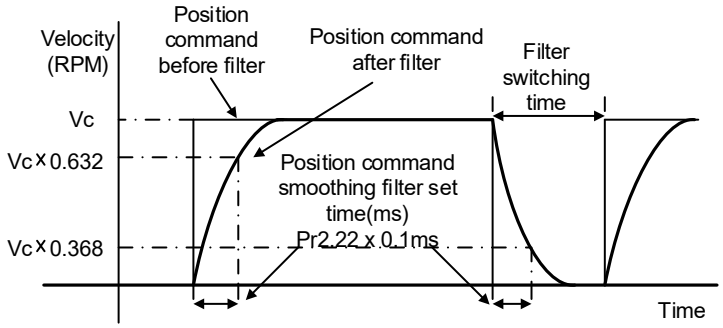


Usually applied when there is rather sharp acceleration which might cause motor overshoot or undershoot. To smoothen command signal, reduces impact to machines and eliminate vibration. If P02.22 is set too high, overall time will be lengthened.

P02.23	Label	Position command FIR filter			Valid mode(s)	P		
	Range	0~2500	Unit	0.1ms	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x022F		
	Valid	At stop						

As shown below, when target velocity Vc square wave command reaches Vc, it becomes trapezoidal wave after filtering.

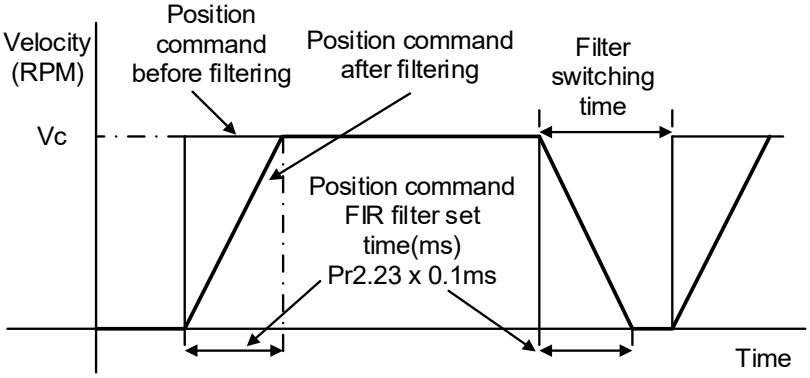

As shown below, when target velocity Vc trapezoidal command reaches Vc, it becomes S wave after filtering.

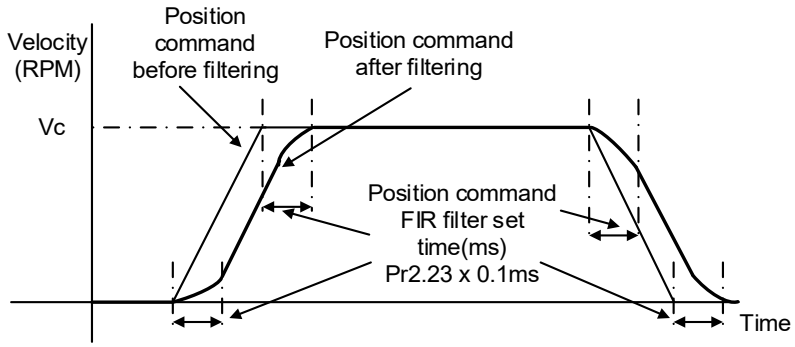

Usually applied when there is rather sharp acceleration which might cause motor overshoot or undershoot. To smoothen command signal, reduces impact to machines and eliminate vibration. If P02.23 is set too high, overall time will be lengthened.

Note: Please wait for command to stop and after filter idle time to modify P02.23.
Filter switching time = (P02.23 set value x 0.1ms + 0.25ms)

P02.48	Label	Adjustment mode			Valid mode(s)	P	S	T
	Range	0~1	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0261		
	Valid	Immediate						

Value	Description
【0】	Turn off automatic adjustments
1	Activate automatic adjustments, real time inertia measuring and vibration suppression. Inertia measuring deactivated after reaching 4 times in 5 minutes, triggering conditions: changes in mechanical stiffness.

P02.50	Label	MFC type			Valid mode(s)	P		
	Range	0~3	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0265		
	Valid	Re-enable						

Value	Description
【0】	Model following control
1	Zero tracking control
2	*3 inertia (future upgrade)*
3	*Path following (future upgrade)*

P02.51	Label	Velocity feedforward compensation coefficient			Valid mode(s)	P		
	Range	-10000~10000	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0267		
	Valid	Immediate						
To compensate for velocity feedforward								

P02.52	Label	Torque feedforward compensation coefficient			Valid mode(s)	P	S	
	Range	-10000~10000	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0269		
	Valid	Immediate						
To compensate for torque feedforward								

P02.53	Label	Dynamic friction compensation coefficient			Valid mode(s)	P	S	T
	Range	0~1000	Unit	%	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x026B		
	Valid	Immediate						

To set ratio of rated torque/rated rotational speed, to compensate for dynamic friction during motion and have better control over acceleration/deceleration.

$$\text{Dynamic friction coefficient} = \left| \frac{\text{Torque(Rotational speed 1)} - \text{Torque(Rotational speed 2)}}{\text{Rotational speed 1} - \text{Rotational speed 2}} * \text{rated rotational speed} \right|$$

When there is an excess position deviation during acceleration/deceleration, please adjust P02.53 to reduce the deviation to 0.

P02.54	Label	Overshoot time coefficient			Valid mode(s)	P	S	T
	Range	0~10000	Unit	%	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x026D		
	Valid	Immediate						
To set overshoot time coefficient								

P02.55	Label	Overshoot suppression gain			Valid mode(s)	P	S	T
	Range	0~10000	Unit	%	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x026F		
	Valid	Immediate						
Suppression improves with larger set value but might affect the performance of MFC. Please use with caution for any value above 100.								

[Class 3] Velocity/Torque Control


P03.00	Label	Velocity internal/external switching			Valid mode(s)	S
	Range	0~3	Unit	—	Default	1
	Byte length	16bit	Attribute	R/W	485 address	0x0301
	Valid	Immediate				

Connect to the right DI to control internal command velocity settings.


Value	Velocity settings
0	Analog - Velocity command（SPR）
【1】	Internal velocity settings 1st – 4th speed（P03.04～P03.07）
2	Internal velocity settings 1st – 3rd speed（P03.04～P3.06）、Analog velocity command（SPR）
3	Internal velocity settings 1st – 8th speed（P03.00～P03.11）

Value	Internal command velocity 1（INTSPD 1）	Internal command velocity 2（INTSPD2）	Internal command velocity 3（INTSPD3）	Velocity command
1	OFF	OFF	No effect	1st speed
	ON	OFF		2nd speed
	OFF	ON		3rd speed
	ON	ON		4th speed
2	OFF	OFF	No effect	1st speed
	ON	OFF		2nd speed
	OFF	ON		3rd speed
	ON	ON		Simulated speed
3	Similar to P03.00=1		OFF	1st – 4th speed
	OFF	OFF	ON	5th speed
	ON	OFF	ON	6th speed
	OFF	ON	ON	7th speed
	ON	ON	ON	8th speed

Please change internal command velocity as per diagram below as unexpected axis movement might occur if 2 command velocities are changed at the same time.

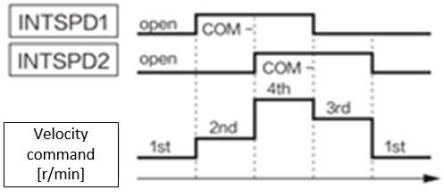

P03.00=1 / 2

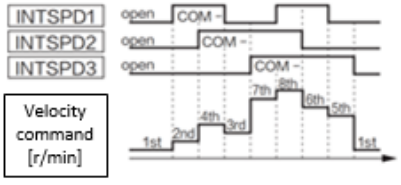

P03.00=3

P03.01	Label	Velocity command rotational direction selection			Valid mode(s)	S
	Range	0~1	Unit	—	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0x0303
	Valid	Immediate				

To set positive/negative direction of velocity command

Value	Velocity settings（Analog or internal velocity）	Velocity command sign selection VC-IGN）	Velocity command direction
【0】	＋	No effect	Positive
	—	No effect	Negative
1	No effect	OFF	Positive
	No effect	ON	Negative

P03.02	Label	Velocity command input gain			Valid mode(s)	S
	Range	10~2000	Unit	(r/min)/V	Default	500
	Byte length	16bit	Attribute	R/W	485 address	0x0305
	Valid	Immediate				

To set gain changes from voltage added onto analog velocity command (SPR) to motor command velocity


P03.02 sets command input voltage and rotational speed slope.

Factory default:

P03.02=500(r/min)/V.

Hence 6V input: 3000 r/min

1. Do not supply more than ±10V power for analog velocity command (SPR).
2. If P03.02 set value is too large, it might cause vibration.

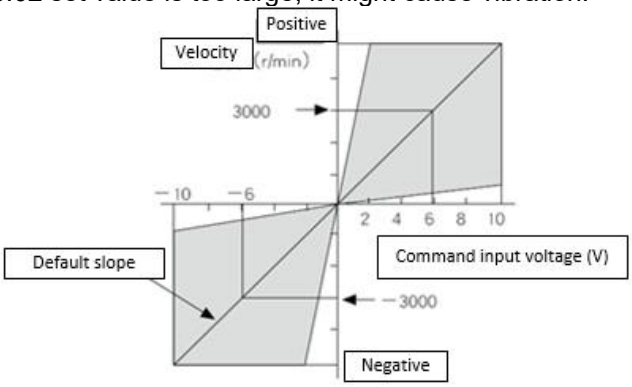

P03.03	Label	Velocity command input inversion			Valid mode(s)	S
	Range	0~1	Unit	—	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0x0307
	Valid	Immediate				

To set voltage polarity of analog velocity command.
Only valid when P03.01 = 0. When P03.01 = 1, rotational direction is only related to VC-SIGN.

Value	Motor rotational direction	
【0】	Not inversed	「Positive voltage」→「Positive direction」 「Negative voltage」→「Negative direction」
1	Inversed	「Positive voltage」→「Positive direction」 「Negative voltage」→「Negative direction」

If there is an external position sensor with different polarity from P03.03, motors might undergo abnormal motion.


P03.04	Label	1st speed of velocity setting			Valid mode(s)	S
	Range	-10000~10000	Unit	r/min	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0x0309
	Valid	Immediate				
P03.05	Label	2nd speed of velocity setting			Valid mode(s)	S
	Range	-10000~10000	Unit	r/min	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0x030B
	Valid	Immediate				
P03.06	Label	3rd speed of velocity setting			Valid mode(s)	S
	Range	-10000~10000	Unit	r/min	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0x030D
	Valid	Immediate				
P03.07	Label	4th speed of velocity setting			Valid mode(s)	S
	Range	-10000~10000	Unit	r/min	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0x030F
	Valid	Immediate				
P03.08	Label	5th speed of velocity setting			Valid mode(s)	S
	Range	-10000~10000	Unit	r/min	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0x0311
	Valid	Immediate				
P03.09	Label	6th speed of velocity setting			Valid mode(s)	S
	Range	-10000~10000	Unit	r/min	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0x0313
	Valid	Immediate				
P03.10	Label	7th speed of velocity setting			Valid mode(s)	S
	Range	-10000~10000	Unit	r/min	Default	
	Byte length	16bit	Attribute	R/W	485 address	0x0315
	Valid	Immediate				
P03.11	Label	8th speed of velocity setting			Valid mode(s)	S
	Range	-10000~10000	Unit	r/min	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0x0317
	Valid	Immediate				

To set internal velocity command 1st -8th speed

P03.12	**Label**	Acceleration time settings			**Valid mode(s)**	S
	Range	0~10000	**Unit**	ms/ (1000rpm)	**Default**	100
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0319
	Valid	Immediate				
P03.13	**Label**	Deceleration time settings			**Valid mode(s)**	S
	Range	0~10000	**Unit**	ms/ (1000rpm)	**Default**	100
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x031B
	Valid	Immediate				

Set max acceleration/deceleration for velocity command.

If target velocity = *x* [rpm], max acceleration = *a* [unit: rpm/ms], acceleration time = *t* [ms]
P03.12 = *1000/a*
P03.13 = *1000/a*
a = x/t

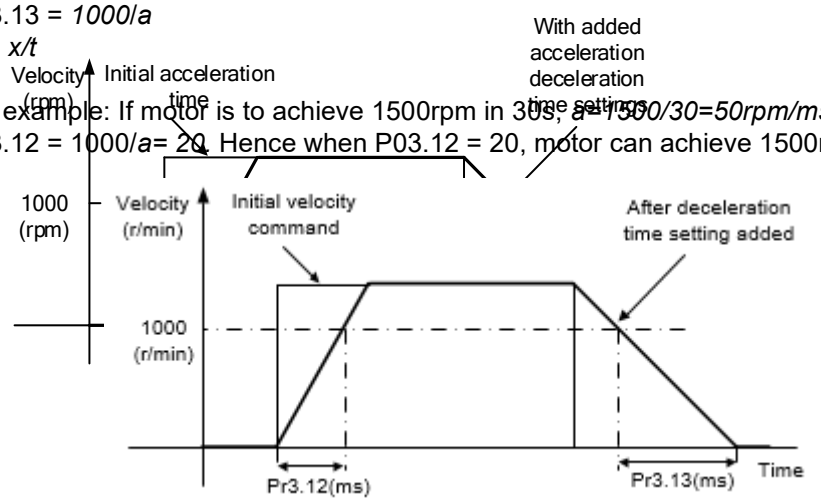


For example: If motor is to achieve 1500rpm in 30s, *a=1500/30=50rpm/ms*
P03.12 = 1000/*a*= 20. Hence when P03.12 = 20, motor can achieve 1500rpm in 30s.

Usually used when there is rapid acceleration or trapezoidal wave velocity command due to many different internal speed segments under velocity control mode which causes instability while motor in motion.
Under velocity control mode, 6083 and 6084 are limited by P03.12 and P03.13 correspondingly.

P03.14	Label	Sigmoid acceleration/deceleration settings			Valid mode(s)	S
	Range	0~1000	Unit	ms	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0x031D
	Valid	After restart				

To set sigmoid acceleration and deceleration turning point in accordance with P03.12 and P03.13.

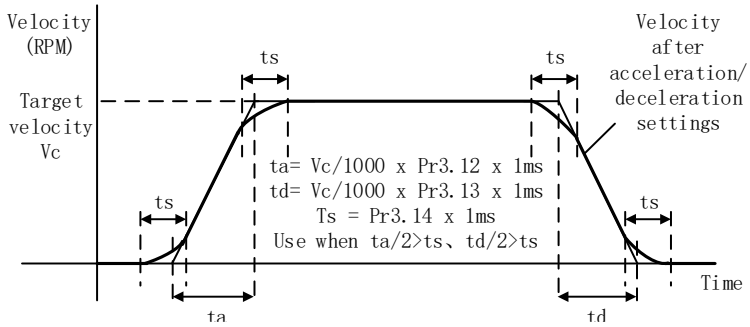

P03.15	Label	Zero speed clamp function selection			Valid mode(s)	S
	Range	0~3	Unit	—	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0x031F
	Valid	Immediate				

Value	Zero speed clamp function
0	Invalid: zero speed clamp deactivated
1	Velocity command is forced to 0 when the zero speed clamp (ZEROSPD) input signal is valid.
2	Velocity command is forced to 0 when actual velocity is lower than P03.16.
3	Includes conditions from 1 and 2

P03.16	Label	Zero speed clamp level			Valid mode(s)	S
	Range	10~2000	Unit	r/min	Default	30
	Byte length	16bit	Attribute	R/W	485 address	0x0321
	Valid	Immediate				

Valid when P03.15 = 2/3, velocity command is forced to 0 when actual velocity is lower than P03.16 and after static time set in P03.23.

P03.17	Label	Torque internal/external switching			Valid mode(s)	T
	Range	0~3	Unit		Default	0
	Byte length	16bit	Attribute	R/W	485 address	0x0323
	Valid	Immediate				

Value	Torque command input	Velocity limit input
【0】	Analog input 3(AI 3)	P03.21 set value
1	Analog input 3(AI 3)	Analog input 1(AI 1)
2	P03.22 set value	P03.21 set value

P03.18	Label	Torque command direction selection			Valid mode(s)		T
	Range	0~1	Unit	—	Default	0	
	Byte length	16bit	Attribute	R/W	485 address	0x0325	
	Valid	Immediate					


To set torque command positive/negative direction

Value	Direction settings
【0】	TC-SIGN ON/OFF has no effect on torque direction Torque command input「Positive」→Positive direction、 「Negative」→Negative direction
1	Use TC-SIGN ON/OFF status for torque direction OFF: *Positive direction* ON: *Negative direction*

P03.19	Label	Torque command input gain			Valid mode(s)		T
	Range	10~100	Unit	0.1V/100%	Default	30	
	Byte length	16bit	Attribute	R/W	485 address	0x0327	
	Valid	Immediate					

To set gain changes from voltage added onto analog torque command (TRQR) to torque command (%)

·Unit: (0.1V/100%)
·Set input voltage required for rated output torque.
·Default = 30， which is 3V/100%

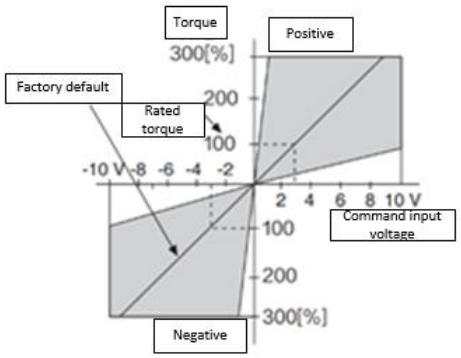

P03.20	Label	Torque command input inversion			Valid mode(s)		T
	Range	0~1	Unit	—	Default	0	
	Byte length	16bit	Attribute	R/W	485 address	0x0329	
	Valid	Immediate					

To set voltage polarity of analog torque command.
Only valid when P03.18 = 0.

Value	Motor torque direction	
【0】	Not inversed	「Positive voltage」→「Positive direction」 「Negative voltage」→「Negative direction」
1	Inversed	「Positive voltage」→「Positive direction」 「Negative voltage」→「Negative direction」

P03.21	Label	Velocity limit in torque mode			Valid mode(s)			T
	Range	0~10000	Unit	r/min	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x032B		
	Valid	Immediate						
To set velocity limit in torque control mode. Only valid when P03.17 = 0 / 2.								

P03.22	Label	Torque command			Valid mode(s)			T
	Range	0~300	Unit	%	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x032D		
	Valid	Immediate						
	To set torque limit in torque control mode. Only valid when P03.17 = 2. Please refer to P03.17.							

P03.23	Label	Zero speed delay time in velocity mode			Valid mode(s)		S	
	Range	0~2000	Unit	ms	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x032F		
	Valid	Immediate						
To set the time interval between axis reaches zero speed level and the moment it totally stops. Used when axis crawls under velocity mode. Set 0 to deactivate this parameter.								

P03.24	Label	Maximum motor rotational speed			Valid mode(s)	P	S	T
	Range	0~10000	Unit	r/min	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0331		
	Valid	Immediate						
To set maximum motor rotational speed but not higher than motor rated speed If P03.24 = 0, maximum motor rotational speed = max. speed in motor parameter.								

P03.29	Label	Analog 1 clamping voltage			Valid mode(s)			T
	Range	0~20000	Unit	mv	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x033B		
	Valid	Immediate						
Only valid when P03.17 = 1. When P03.17=1, velocity is set to 0 if analog 1 voltage is below P03.29 set value.								
P03.30	Label	Analog 3 clamping voltage			Valid mode(s)			T
	Range	0~20000	Unit	mv	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x033D		
	Valid	Immediate						
Only valid when P03.17 = 1 / 0. When P03.17=1 / 0, velocity is set to 0 if analog 1 voltage is below P03.30 set value.								

[Class 4] I/O Monitoring Settings

P04.00	Label	Input selection DI1			Valid mode(s)	P	S	T
	Range	0x00~0xFF	Unit	—	Default	0x2		
	Byte length	16bit	Attribute	R/W	485 address	0x0401		
	Valid	Immediate						

Please refer to the table below to set DI signals and table on the right for corresponding pin and parameters

Signal	Symbol	Value	
		NO	NC
Invalid	—	0	-
Positive limit switch	POT	1	81
Negative limit switch	NOT	2	82
Servo enabled	SRV-ON	3	83
Clear alarm	A-CLR	4	-
Control mode switching	C-MODE	5	85
Gain switching	GAIN	6	86
Clear deviation count	CL	7	-
Command pulse prohibited	INH	8	88
Torque limit switching	TL-SEL	9	89
Command frequency divider/multiplier switching	DIV1	C	8C
Internal command velocity 1	INTSPD1	E	8E
Internal command velocity 2	INTSPD2	F	8F
Internal command velocity 3	INTSPD3	10	90
Zero speed clamp	ZEROSPD	11	91
Velocity command sign	VC-SIGN	12	92
Torque command sign	TC-SIGN	13	93
Forced alarm	E-STOP	14	94
Vibration suppression 1	VS-SEL1	0A	8A
Vibration suppression 2	VS-SEL2	0B	8B

CN1 PIN	Input	Parameters
8	DI1	P04.00
9	DI2	P04.01
26	DI3	P04.02
27	DI4	P04.03
28	DI5	P04.04
29	DI6	P04.05
30	DI7	P04.06
31	DI8	P04.07
32	DI9	P04.08
33	DI10	P04.09

Please don't set anything other than listed in the table above.
Normally open (NO): Valid when input = ON
Normally close (NC): Valid when input = OFF
Er210 might occur if same function is allocated to different channels at the same time
Servo enabled（SRV-ON）has to be allocated to enabled servo driver.

Inputs related to Pr-mode:

Signal	Symbol	Value	
		NO	NC
Trigger command	CTRG	20	A0
Home	HOME	21	A1
Forced stop	STP	22	A2

Signal	Symbol	Value	
		NO	NC
Positive JOG	PJOG	23	A3
Negative JOG	NJOG	24	A4
Positive limit	PL	25	A5
Negative limit	NL	26	A6
Origin	ORG	27	A7
Path address 0	ADD0	28	A8
Path address 1	ADD1	29	A9
Path address 2	ADD2	2A	AA
Path address 3	ADD3	2B	AB

Note: CTRG, HOME are edge triggered, please make sure electronic bits last 1ms or above.

P04.01	Label	Input selection DI2	Valid mode(s)	P	S	T

	Range	0x0~0xFF	**Unit**	—	**Default**	0x1		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0403		
	Valid	Immediate						
P04.02	**Label**	Input selection DI3			**Valid mode(s)**	**P**	**S**	**T**
	Range	0x0~0xFF	**Unit**	—	**Default**	0x0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0405		
	Valid	Immediate						
P04.03	**Label**	Input selection DI4			**Valid mode(s)**	**P**	**S**	**T**
	Range	0x0~0xFF	**Unit**	—	**Default**	0x6		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0407		
	Valid	Immediate						
P04.04	**Label**	Input selection DI5			**Valid mode(s)**	**P**	**S**	**T**
	Range	0x0~0xFF	**Unit**	—	**Default**	0xC		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0409		
	Valid	Immediate						
P04.05	**Label**	Input selection DI6			**Valid mode(s)**	**P**	**S**	**T**
	Range	0x0~0xFF	**Unit**	—	**Default**	0x3		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x040B		
	Valid	Immediate						
P04.06	**Label**	Input selection DI7			**Valid mode(s)**	**P**	**S**	**T**
	Range	0x0~0xFF	**Unit**	—	**Default**	0x7		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x040D		
	Valid	Immediate						
P04.07	**Label**	Input selection DI8			**Valid mode(s)**	**P**	**S**	**T**
	Range	0x0~0xFF	**Unit**	—	**Default**	0x4		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x040F		
	Valid	Immediate						
P04.08	**Label**	Input selection DI9			**Valid mode(s)**	**P**	**S**	**T**
	Range	0x0~0xFF	**Unit**	—	**Default**	0x5		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0411		
	Valid	Immediate						
P04.09	**Label**	Input selection DI10			**Valid mode(s)**	**P**	**S**	**T**
	Range	0x0~0xFF	**Unit**	—	**Default**	0x8		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0411		
	Valid	Immediate						
·DI2~DI10allocation is the same as DI1. Please refer to P04.00.								

P04.10	**Label**	Output selection DO1			**Valid mode(s)**	**P**	**S**	**T**
	Range	0x0~0xFF	**Unit**	—	**Default**	0x3		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0415		
	Valid	Immediate						

Please allocate DO as per table below. ALARM logic is the opposite of others

Value		Signal	Symbol
NO	**NC**		
00	80	Invalid	—
01	81	Alarm	ALARM
02	82	Servo-Ready	SRDY
03	83	External brake released	BRK-OFF
04	84	Positioning completed	INP
05	85	At-speed	AT-SPPED
06	86	Torque limit signal	TLC
07	87	Zero speed clamp detection	ZSP
08	88	Velocity coincidence	V-COIN

CN1 PIN	Output	Parameters
11	DO1+	P04.10
10	DO1-	
35	DO2+	P04.11
34	DO2-	
37	DO3+	P04.12
36	DO3-	
39	DO4+	P04.13

12	92	Servo Status	SRV-ST
15	95	Positive limit valid	POT-OUT
16	96	Negative limit valid	NOT-OUT
0B	8B	Position command ON/OFF	P-CMD
0F	8F	Velocity command ON/OFF	V-CMD
0D	8D	Velocity limit signal	V-LIMIT
14	94	Position comparison	CMP-OUT

38	DO4-	
12	DO5	P04.14
40	DO6	P04.15

Same signal can be assigned to multiple different outputs.
Normally open (NO)：Active low
Normally close (NC)：Active high
Err212 might occur if output is allocated to signals other than listed in the table above.
Outputs related to PR-mode

Signal	Symbol	Value	
		NO	NC
Command completed	CMD-OK	20	A0
Path completed	PR-OK	21	A1
Homing done	HOME-OK	22	A2

Note: CMD-OK indicates PR command is sent by axis might not yet be in position. PR-OK indicates axis is in place.

P04.11	**Label**	Output selection DO2			**Valid mode(s)**	**P**	**S**	**T**
	Range	0x0~0xFF	**Unit**	—	**Default**	0x2		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0417		
	Valid	Immediate						
P04.12	**Label**	Output selection DO3			**Valid mode(s)**	**P**	**S**	**T**
	Range	0x0~0xFF	**Unit**	—	**Default**	0x1		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0419		
	Valid	Immediate						
P04.13	**Label**	Output selection DO4			**Valid mode(s)**	**P**	**S**	**T**
	Range	0x0~0xFF	**Unit**	—	**Default**	0x4		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x041B		
	Valid	Immediate						
P04.14	**Label**	Output selection DO5			**Valid mode(s)**	**P**	**S**	**T**
	Range	0x0~0xFF	**Unit**	—	**Default**	0x7		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x041D		
	Valid	Immediate						
P04.15	**Label**	Output selection DO6			**Valid mode(s)**	**P**	**S**	**T**
	Range	0x0~0xFF	**Unit**	—	**Default**	0x6		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x041F		
	Valid	Immediate						

DO2-DO6 is allocated by the same method as per DO1. Please refer to P04.10.

P04.22	**Label**	Analog input 1(AI-1) Zero drift settings			**Valid mode(s)**		**S**
	Range	-1860~1860	**Unit**	5.37mv	**Default**	0	
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x042D	
	Valid	Immediate					
	To set zero drift compensation value on analog input 1 voltage for zero drift correction.						
P04.23	**Label**	Analog input 1(AI-1) filter			**Valid mode(s)**		**S**
	Range	0~6400	**Unit**	0.01ms	**Default**	0	
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x042F	
	Valid	Immediate					
	To set a delay filter time coefficient for AI1 input voltage. When filter time takes effect, input voltage will be smoothened.						
P04.24	**Label**	Analog input 1(AI-1) overvoltage settings			**Valid mode(s)**		**S**
	Range	0~100	**Unit**	0.1V	**Default**	0	
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0431	
	Valid	Immediate					
	P04.24 is invalid when set to 0. Er270 might occur when the input voltage of AI1 is higher than the voltage after zero drift correction.						

P04.28	**Label**	Analog input 3(AI-3) Zero drift settings			**Valid mode(s)**		**T**
	Range	-1860~1860	**Unit**	5.37mv	**Default**	0	
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0439	
	Valid	Immediate					
	To set zero drift compensation value on analog input 3 voltage for zero drift correction.						
P04.29	**Label**	Analog input 3(AI-3) filter			**Valid mode(s)**		**T**
	Range	0~6400	**Unit**	0.01ms	**Default**	0	
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x043B	
	Valid	Immediate					
	To set a delay filter time coefficient for AI3 input voltage. When filter time takes effect, input voltage will be smoothened.						
P04.30	**Label**	Analog input 3(AI-3) overvoltage settings			**Valid mode(s)**		**T**
	Range	0~100	**Unit**	0.1V	**Default**	0	
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x043D	
	Valid	Immediate					
	P04.30 is invalid when set to 0. Er270 might occur when the input voltage of AI3 is higher than the voltage after zero drift correction.						

P04.31	Label	Positioning complete range			Valid mode(s)	P		
	Range	0～10000	Unit	P05.21 set unit	Default	20		
	Byte length	16bit	Attribute	R/W	485 address	0x043F		
	Valid	Immediate						

To set position deviation range of INP1 positioning completed output signal. INP1 output signal will be valid once position is complete within the range of deviation set.
Default unit: 0.00001rev. Can be set on P05.21 as command unit (pulse) or encoder unit (pulse)

P04.32	Label	Positioning complete output setting			Valid mode(s)	P		
	Range	0~4	Unit	—	Default	1		
	Byte length	16bit	Attribute	R/W	485 address	0x0441		
	Valid	Immediate						

To set conditions for INP1 output signal to be valid

Value	Positioning completed signal
0	Signal valid when the position deviation is smaller than P04.31
1	Signal valid when there is no position command and position deviation is smaller than P04.31
2	Signal valid when there is no position command, zero-speed clamp detection (ZSP) signal is ON, and the positional deviation is smaller than P04.31
3	Signal valid when there is no position command and position deviation is smaller than P04.31. Signal ON when within the time set in P04.33 otherwise OFF.
4	When there is no command, position detection starts after the delay time set in P04.33. Signal valid when there are no position command and positional deviation is smaller than P04.31.

P04.33	Label	INP positioning delay time			Valid mode(s)	P		
	Range	0~15000	Unit	1ms	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0443		
	Valid	Immediate						


Valid when P04.32 = 3.

Set value	Positioning completed signal
0	Indefinite delay time, signal ON until next position command
1-15000	OFF within the time set; ON after time set. Switch OFF after receiving next position command.

P04.34	Label	Zero speed			Valid mode(s)	P	S	T
	Range	1~2000	Unit	r/min	Default	50		
	Byte length	16bit	Attribute	R/W	485 address	0x0445		
	Valid	Immediate						

To set threshold value for zero speed clamp detection.
Zero speed clamp detection (ZSP) output signal valid when motor speed goes under the value set in P04.34


- Disregard the direction of rotation, valid for both directions.
- Hysteresis of 5RPM. Please refer to diagram on the right side.

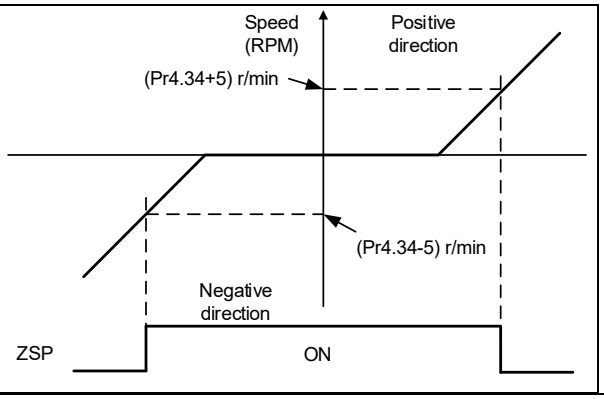

P04.35	Label	Velocity coincidence range			Valid mode(s)		S	
	Range	10~2000	Unit	r/min	Default	50		
	Byte length	16bit	Attribute	R/W	485 address	0x0447		
	Valid	Immediate						


If the difference between velocity command and motor actual speed is below P04.35, Velocity coincidence (V-COIN) output signal valid.

Due to 10RPM hysteresis:
Velocity coincidence output OFF -> ON timing (P04.35 -10) r/min
Velocity coincidence output ON -> OFF timing (P04.35 +10) r/min

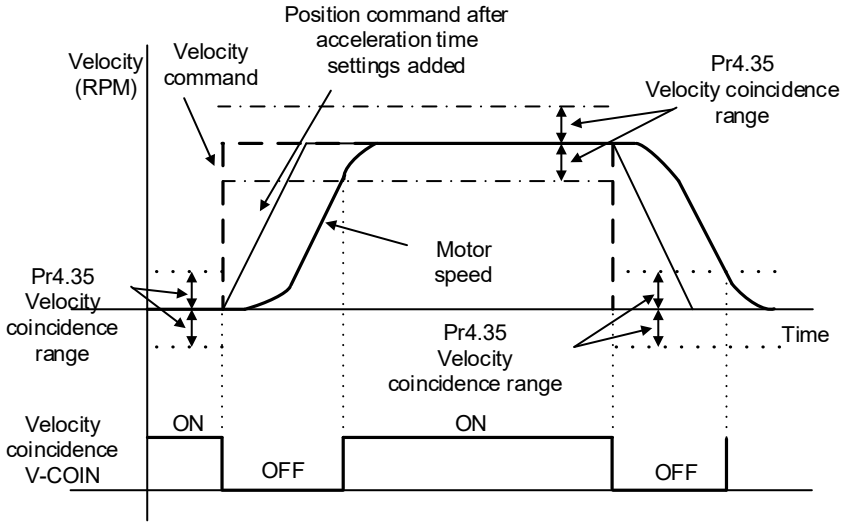

P04.36	Label	Arrival velocity			Valid mode(s)	S
	Range	10~2000	Unit	r/min	Default	1000
	Byte length	16bit	Attribute	R/W	485 address	0x0449
	Valid	Immediate				

When motor velocity > P04.36, AT-speed output signal is valid.
Detection using 10RPM hysteresis.

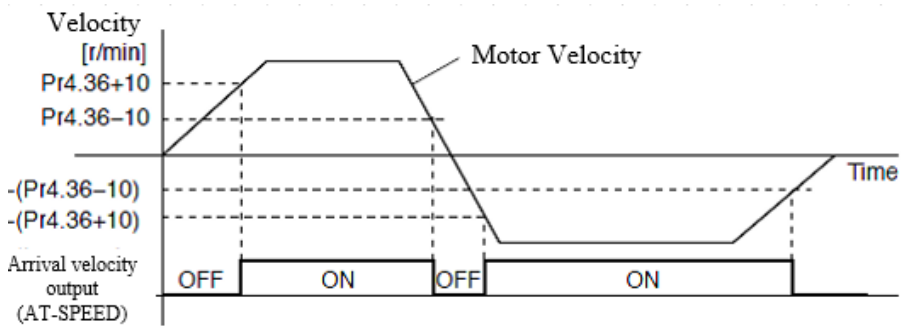


P04.37	Label	Motor power-off delay time			Valid mode(s)	P	S	T
	Range	0~3000	Unit	1ms	Default	150		
	Byte length	16bit	Attribute	R/W	485 address	0x044B		
	Valid	Immediate						

To set delay time for holding brake to be activated after motor power off to prevent axis from sliding.
When P05.06 = 0, SRV-ON signal is off, holding brake is activated (delay time is determined by P04.39 or P06.14). Motor powered off once delay time set in P04.37 is due.

P04.38	Label	Holding brake release time			Valid mode(s)	P	S	T
	Range	0~3000	Unit	1ms	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x044D		
	Valid	Immediate						

- To set delay time for holding brake to be released after motor power on. Motor will remain at current position, and input command is masked to allow holding brake to be fully released before motor is set in motion.

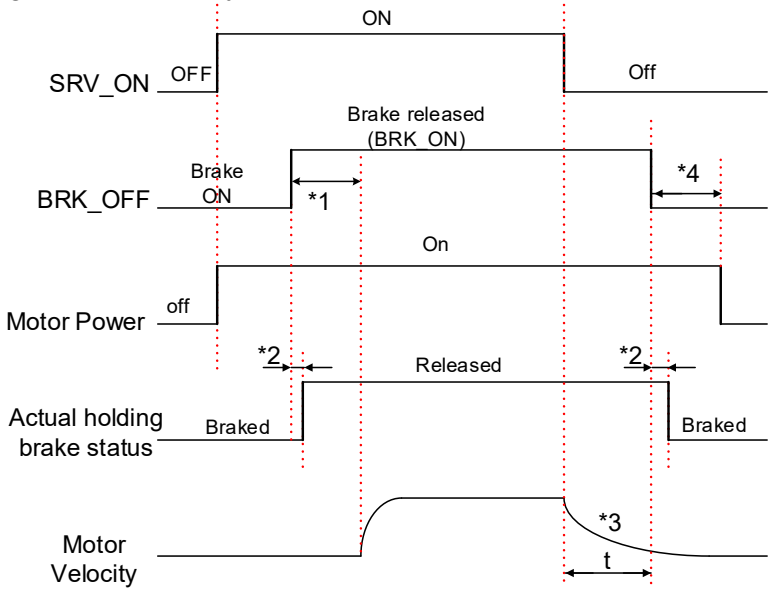

*1: Delay time set in P04.38
*2: Delay time from the moment BRK_OFF signal is given until actual holding brake is released or BRK_ON signal is given until actual holding brake is activated. It is dependent on the holding brake of the motor.

*3: Deceleration time is determined by P06.14 or if motor speed goes below P04.39, whichever comes first. BRK_OFF given after deceleration time.
*4: P04.37 set time value.

Delay time from the moment SRV_ON is given until BRK_OFF switches to BRK_ON, is less than 500ms.

P04.39	Label	Holding brake activation speed			Valid mode(s)	P	S	T
	Range	30~3000	Unit	r/min	Default	30		
	Byte length	16bit	Attribute	R/W	485 address	0x044F		
	Valid	Immediate						

To set the activation speed for which holding brake will be activated.

When SRV-OFF signal is given, motor decelerates, after it reaches below P04.39 and P06.14 is not yet reached, BRK_OFF is given.
BRK_OFF signal is determined by P06.14 or if motor speed goes below P04.39, whichever comes first.

Application:
1. After disabling axis, P06.14 has been reached but motor speed is still above P04.39, BRK_OFF signal given.
2. After disabling axis, P06.14 has not been reached but motor speed is below P04.39, BRK_OFF signal given.

Deceleration max duration: 2s. Servo disabled after 2s.

P04.43	Label	Emergency stop function			Valid mode(s)	P	S	T
	Range	0~1	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0457		
	Valid	Immediate						

Value	Description.
【0】	Emergency stop is valid, servo driver will be forced to STOP and Err570 occurs.
1	Emergency stop is invalid, servo driver will not be forced to STOP. Servo can be enabled once E-STOP signal is cleared.

P04.64	Label	AO1 output			Valid mode(s)	P	S	T
	Range	0~10	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0481		
	Valid	Immediate						

Value	Description
【0】	Negative/Positive value: -10~10V
1	Absolute value output: 0~10V
Other	Reserved

P04.65	Label	AO1 signal			Valid mode(s)	P	S	T
	Range	0x0~0x7FFFFFFF	Unit	—	Default	0x4		
	Byte length	16bit	Attribute	R/W	485 address	0x0483		
	Valid	Immediate						

Bit 0 – 15: AO signal source; Bit 16 – 31: DO extension channel

Bit0~Bit15	Signal source
0x0	-
0x1	Motor rotational speed (V/krpm)
0x2	Position command velocity (V/krpm)
0x3	Internal position command velocity (V/krpm)
0x4	Torque command (0.03V/0.01)
0x5	Position command deviation (mV/Command unit)
0x6	Position command deviation (mV/Encoder unit)
0x7	Analog 1 (V/V)
0x8	Analog 2 (V/V)
0x9	Analog 3 (V/V)
0xA	Extension DO (0V/5V)
0xB	As per P04.67

Bit 16 – 31: Only available when AO signal source = 0xA

Bit16~Bit31	Channel
01h	Alarm output
02h	Servo ready
03h	External brake released
04h	Positioning completed
…	Please refer to P04.10 for other signal channels

P04.66	Label	AO1 amplification			Valid mode(s)	P	S	T
	Range	-10000~10000	Unit	0.01	Default	100		
	Byte length	16bit	Attribute	R/W	485 address	0x0485		
	Valid	Immediate						

To set the amplification of AO1, actual voltage output = amplification x theoretical voltage

P04.67	Label	AO1 communication settings			Valid mode(s)	P	S	T
	Range	-10000~10000	Unit	mV	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0487		
	Valid	Immediate						

Available when AO1 = 0xB

P04.68	Label	AO1 offset			Valid mode(s)	P	S	T
	Range	-10000~10000	Unit	mV	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0489		
	Valid	Immediate						

To set AO1 offset value.

P04.69	Label	AO2 output			Valid mode(s)	P	S	T
	Range	0~10	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x048B		
	Valid	Immediate						

Value	Description
【0】	Negative/Positive value: -10~10V
1	Absolute value output: 0~10V
Other	Reserved

P04.70	Label	AO2 signal			Valid mode(s)	P	S	T
	Range	0x0~0xFFFF	Unit	—	Default	0x1		
	Byte length	16bit	Attribute	R/W	485 address	0x048D		
	Valid	Immediate						

Bit 0 – 15: AO signal source; Bit 16 – 31: DO extension channel

Bit0~Bit15	Signal source
0x0	-
0x1	Motor rotational speed (V/krpm)
0x2	Position command velocity (V/krpm)
0x3	Internal position command velocity (V/krpm)
0x4	Torque command (0.03V/0.01)
0x5	Position command deviation (mV/Command unit)
0x6	Position command deviation (mV/Encoder unit)
0x7	Analog 1 (V/V)
0x8	Analog 2 (V/V)
0x9	Analog 3 (V/V)
0xA	Extension DO (0V/5V)
0xB	As per P04.72

Bit 16 – 31: Only available when AO signal source = 0xA

Bit16~Bit31	Channel
01h	Alarm output
02h	Servo ready
03h	External brake released
04h	Positioning completed
…	Please refer to P04.10 for other signal channels

P04.71	Label	AO2 amplification			Valid mode(s)	P	S	T
	Range	-10000~10000	Unit	0.01	Default	100		
	Byte length	16bit	Attribute	R/W	485 address	0x048F		
	Valid	Immediate						

To set the amplification of AO2, actual voltage output = amplification x theoretical voltage.

P04.72	Label	AO2 communication settings			Valid mode(s)	P	S	T
	Range	-10000~10000	Unit	mV	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0491		
	Valid	Immediate						

Available when AO2= 0xB

P04.73	Label	AO2 offset			Valid mode(s)	P	S	T
	Range	-10000~10000	Unit	mV	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0493		
	Valid	Immediate						

To set AO2 offset value.

P04.74	Label	Warning indicator light 1 signal			Valid mode(s)	P	S	T
	Range	0~100	Unit	-	Default	1		
	Byte length	16bit	Attribute	R/W	485 address	0x0495		
	Valid	Immediate						

To select warning signal for warning indicator light 1

Value	Signal
【0】	None
1	Negative limit
2	Battery low voltage
3	Overload
4	Torque limit
5	Positive limit
other	*Reserved*

During normal operation, warning indicator light will be lighted in a cycle.

P04.75	Label	Warning indicator light 2 signal			Valid mode(s)	P	S	T
	Range	0~100	Unit	-	Default	2		
	Byte length	16bit	Attribute	R/W	485 address	0x0497		
	Valid	Immediate						

To select warning signal for warning indicator light 2, as per table in P04.74

P04.76	Label	Warning indicator light 3 signal			Valid mode(s)	P	S	T
	Range	0~100	Unit	-	Default	3		
	Byte length	16bit	Attribute	R/W	485 address	0x0499		
	Valid	Immediate						

To select warning signal for warning indicator light 3, as per table in P04.74

P04.77	Label	Warning indicator light 4 signal			Valid mode(s)	P	S	T
	Range	0~100	Unit	-	Default	4		
	Byte length	16bit	Attribute	R/W	485 address	0x049B		
	Valid	Immediate						

To select warning signal for warning indicator light 4, as per table in P04.74

P04.78	Label	Warning indicator light 5 signal			Valid mode(s)	P	S	T
	Range	0~100	Unit	-	Default	5		
	Byte length	16bit	Attribute	R/W	485 address	0x049D		
	Valid	Immediate						

To select warning signal for warning indicator light 5, as per table in P04.74

[Class 5] Extension Settings

P05.00	Label	2nd pulse count per revolution			Valid mode(s)	P		
	Range	0-67108864	Unit	PULSE	Default	10000		
	Byte length	32bit	Attribute	R/W	485 address	H: 0x0500 L: 0x0501		
	Valid	After restart						

Switch between P00.08 and P05.00 with DI signal DIV1.
When switch to P05.00:
（1）P05.00 valid when ≠ 0:
Motor revolution = Input pulse count / [P05.00 set value]
（2）P05.00 invalid when = 0:
Actual position pulse count is according to P05.01 and P05.02.
Switching with DIV1 signal is only valid when servo driver is re-enabled.

P05.01	Label	2nd Command frequency divider/multiplier numerator			Valid mode(s)	P		
	Range	1~1073741824	Unit	—	Default	1		
	Byte length	32bit	Attribute	R/W	485 address	H: 0x0502 L: 0x0503		
	Valid	After restart						

To set command pulse input frequency division and multiplication numerator

P05.02	Label	2nd Command frequency divider/multiplier denominator	Valid mode(s)	P		

	Range	1~1073741824	**Unit**	—	**Default**	1
	Byte length	32bit	**Attribute**	R/W	**485 address**	H: 0x0504 L: 0x0505
	Valid	After restart				
To set command pulse input frequency division and multiplication denominator. Please refer to P00.09 and P00.10. Switch using DIV1 signal.						

P05.04	**Label**	Driver prohibition input settings			**Valid mode(s)**	**P**	**S**	**T**
	Range	0/1/2	**Unit**	—	**Default**	0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0509		
	Valid	Immediate						

To set driver prohibition input (POT/NOT)

Value	Description
0	POT → Positive direction drive prohibited NOT → Negative direction drive prohibited
1	POT and NOT invalid
2	Any single sided input from POT or NOT might cause Er260

P05.06	**Label**	Servo-off mode			**Valid mode(s)**	**P**	**S**	**T**
	Range	0~1	**Unit**	—	**Default**	0		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x050D		
	Valid	Immediate						

To set servo driver disable mode and status.

Value	Description	
	Mode	*Status*
0	Servo braking	Dynamic braking
1	Free stopping	Dynamic braking
2	Dynamic braking	Dynamic braking
3	Servo braking	Free-run
4	Free stopping	Free-run
5	Dynamic braking	Free-run

Servo braking: Stop servo axis quickly using braking torque
P05.06 only effective for stopping under normal circumstances. For stopping on alarm occurrence but refer to P05.10

P05.09	Label	Main power-off detection time			Valid mode(s)	P	S	T
	Range	50~200	Unit	ms	Default	50		
	Byte length	16bit	Attribute	R/W	485 address	0x0513		
	Valid	Immediate						
To set delay time for detection of main power-off or low voltage supply.								

P05.10	Label	Servo-off due to alarm mode			Valid mode(s)	P	S	T
	Range	0~2	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0515		
	Valid	After restart						

To set servo driver disable mode and status if alarm is triggered.
Alarm type 2:

Value	Explanation	
	Mode	*Status*
0	Servo braking	Dynamic braking
1	Free stopping	Dynamic braking
2	Dynamic braking	Dynamic braking
3	Servo braking	Free-run
4	Free stopping	Free-run
5	Dynamic braking	Free-run

Alarm type 1:

Value	Explanation	
	Mode	*Status*
0	Dynamic braking	Dynamic braking
1		
2		
3	Servo braking	Free-run
4	Free stopping	Free-run
5	Dynamic braking	Free-run

P05.11	Label	Servo braking torque setting			Valid mode(s)	P	S	T
	Range	0~500	Unit	%	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0517		
	Valid	Immediate						

To set torque limit for servo braking mode.
If P05.11 = 0, use torque limit as under normal situation.
Please note that if P05.11 set value is too low, emergency stop will take longer.

P05.12	Label	Overload level setting			Valid mode(s)	P	S	T
	Range	0~115	Unit	%	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0519		
	Valid	Immediate						

· When set to 0, overload level = 100%.
·Set to 0 under regular usage. Lowering overload level will cause motor to overload in shorter time.
·Er100 occurs when driver output current higher than motor rated current (overload)
Er101 occurs when driver output current lower than motor rated current

P05.13	Label	Overspeed level settings			Valid mode(s)	P	S	T
	Range	0~10000	Unit	r/min	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x051B		
	Valid	Immediate						
	If motor speed exceeds P05.13, Er1A0 might occur. When P05.13 = 0, overspeed level = max. motor speed x 1.2							

P05.15	Label	I/O digital filter			Valid mode(s)	P	S	T
	Range	0~255	Unit	0.1ms	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x051F		
	Valid	After restart						
	Digital filtering of I/O input. Overly large value set will cause control delay.							

P05.17	Label	Counter clearing input mode			Valid mode(s)	P		
	Range	0~4	Unit	—	Default	3		
	Byte length	16bit	Attribute	R/W	485 address	0x0523		
	Valid	Immediate						

To set the clearing conditions for deviation counter clearing input signal.

Value	Condition
0/2/4	Invalid
1	Always clear
3	Clear only once (Rising edge trigger)

P05.20	Label	Position unit settings			Valid mode(s)	P		
	Range	0~2	Unit	—	Default	1		
	Byte length	16bit	Attribute	R/W	485 address	0x0529		
	Valid	Immediate						

Set unit for position related parameters

Value	Unit
0	Encoder unit
1	Command unit
2	0.0001rev

Command unit: Pulse from host (Affected by electronic gear ratio)
Encoder unit: Pulse from encoder (Related to encoder resolution)
P05.20 can only be modified when axis is disabled as it will clear position data

P05.21	Label	Torque limit selection			Valid mode(s)	P	S	T
	Range	0~6	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x052B		
	Valid	Immediate						

Value		Limit
【0】		1st torque limit P00.13
1		2nd torque limitP05.22
2	TL-SEL OFF	P00.13
	TL-SEL ON	P05.22
3~4		Reserved
5		P00.13 →Positive torque limit P05.22 →Negative torque limit

P05.22	Label	2nd torque limit			Valid mode(s)	P	S	T
	Range	0~500	Unit	%	Default	300		
	Byte length	16bit	Attribute	R/W	485 address	0x052D		
	Valid	Immediate						

P05.22 is limited by max. torque set in motor parameter.

P05.23	Label	Positive torque warning threshold			Valid mode(s)	P	S	T
	Range	0~300	Unit	%	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x052F		
	Valid	Immediate						

Default = 0, which is 95%. Other values are only valid when P05.21 = 5.
If actual torque is higher than threshold, TLC torque limit signal will be valid.

P05.24	Label	Negative torque warning threshold			Valid mode(s)	P	S	T
	Range	0~300	Unit	%	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0531		
	Valid	Immediate						

Default = 0, which is 95%. Other values are only valid when P05.21 = 5.
If actual torque is higher than threshold, TLC torque limit signal will be valid.

P05.28	Label	LED initial status			Valid mode(s)	P	S	T
	Range	0~35	Unit	—	Default	1		
	Byte length	16bit	Attribute	R/W	485 address	0x0539		
	Valid	Immediate						

To set content display on front panel of the servo driver at servo driver power on.

Value	Status	Value	Status	Value	Status
0	Position deviation	14	Regenerative load rate	28	Software version
1	Motor speed	15	Overload rate	29	Internal usage
2	Position command deviation	16	Inertia load ratio	30	Encoder communication failure counts
3	Velocity control command	17	Cause(s) of non-rotation	31	Accumulated uptime
4	Actual feedback torque	18	No. of I/O changes	32	Internal usage
5	Feedback pulse sum	19	Internal usage	33	Driver temperature
6	Command pulse sum	20	Absolute encoder data	34	Servo status
7	Max. torque	21	Encoder single turn data	35	Internal usage
8	Position command frequency	22	Encoder multiturn data	43	External encoder Z-phase count
9	Control mode	23	485 receive frame	44	External encoder feedback pulse per revolution
10	I/O status	24	Encoder position deviation	45	External encoder direction
11	Analogue input	25	Internal usage	46	Current position comparison point
12	Alarm cause & history record	26	Internal usage		
13	Warning ID	27	PN Voltage		

P05.29	Label	RS485 communication mode			Valid mode(s)	P	S	T
	Range	0~255	Unit	—	Default	5		
	Byte length	16bit	Attribute	R/W	485 address	0x053B		
	Valid	After restart						

Value	Bit	Checksum	Stop
0	8	Even	2
1	8	Odd	2
2	8	Even	1
3	8	Odd	1
4	8	Null	1
【5】	8	Null	2

P05.30	Label	RS485 communication Baud rate			Valid mode(s)	P	S	T
	Range	0~15	Unit	—	Default	4		
	Byte length	16bit	Attribute	R/W	485 address	0x053D		
	Valid	After restart						

Value	Baud rate
0	2400bps
1	4800bps
2	9600bps
3	19200bps

Value	Baud rate
【4】	38400bps
5	57600bps
6	115200bps

Baud rate tolerance: 2400～38400bps±0.5%, 57600～115200bps±2%

P05.31	Label	RS485 axis address			Valid mode(s)	P	S	T
	Range	0~127	Unit	—	Default	1		
	Byte length	16bit	Attribute	R/W	485 address	0x053F		
	Valid	After restart						

When controller is connected to multiple axis and controller needs to identify the axis, P05.31 can be used to set the axis ID/address.
Please set to a max of 31 if the communication is between RS232 and RS485

P05.32	Label	Max. command pulse input frequency			Valid mode(s)	P		
	Range	0~8000	Unit	kHz	Default	4100		
	Byte length	16bit	Attribute	R/W	485 address	0x0541		
	Valid	Immediate						

Please set the max. frequency required for command pulse input. Er1B0 will occur, if command pulse input frequency exceeds P05.32.

P05.35	Label	Front panel lock setting			Valid mode(s)	P	S	T
	Range	0~1	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0547		
	Valid	Immediate						

Value	Description
【0】	Front panel does not lock
1	Only parameter modification through front panel is locked

P05.37	Label	Torque saturation alarm detection time			Valid mode(s)	P	S	T
	Range	0~5000	Unit	ms	Default	500		
	Byte length	16bit	Attribute	R/W	485 address	0x0549		
	Valid	Immediate						

To set the delay time for detection of torque over limit under torque homing mode.
Under homing mode, when torque exceeds limit and the time set in P05.37, TLC output signal will be valid.


P05.42	Label	Frequency divider output – Z-signal polarity			Valid mode(s)	P	S	T
	Range	0~7	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0555		
	Valid	Disabled						

Bit	Polarity	Description
Bit0	0 = Positive 1 = Negative	Z polarity setting of frequency divider output and position comparison
Bit1	0 = Positive 1 = Negative	Only valid in position comparison. Polarity setting when phase A frequency divider as position comparison output
Bit2	0 = Positive	Only valid in position comparison. Polarity setting when phase B frequency divider as position comparison output

P05.43	Label	Frequency divider output – Z-signal width			Valid mode(s)	P	S	T
	Range	0~500	Unit	μs	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0557		
	Valid	After restart						

Value	Description
【0】	Z bandwidth equivalent to 1 cycle of A/B
1~500	Delay setting on top of A/B cycle width

When P05.43 = 0, width of frequency divider output Z-signal is equivalent to width of 1 cycle of A/B, value set in P05.43 + A/B cycle width = delay setting.

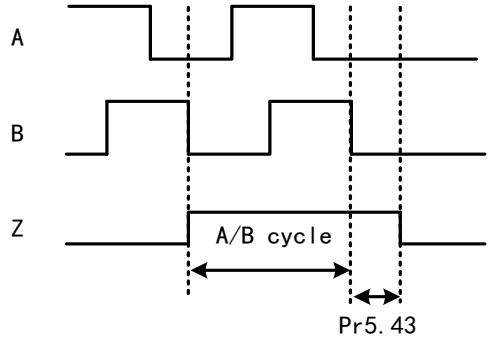

P05.44	Label	Frequency divider output source			Valid mode(s)	P	S	T
	Range	0~4	Unit	—	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0559		
	Valid	After restart						

Value	Description
【0】	Position feedback of encoder #1(motor encoder)
1	Position feedback of encoder #2(external encoder)
2	Reserved
3	Pulse input command position synchronous output; position comparison not available in this mode
4	Frequency divider output prohibited

P05.46	Label	Vent overload level			Valid mode(s)	P	S	T
	Range	0~115	Unit	%	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x055D		
	Valid	After restart						

Value	Description
【0】	Default level: 80%
1~115	Set vent overload level accordingly

[Class 6] Other Settings

P06.01	Label	Encoder zero position compensation			Valid mode(s)	P	S	T
	Range	0~360	Unit	Electrical angel	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0603		
	Valid	Power-off						
	Zero position compensation for encoder zero drift to avoid abnormality due to zero drift.							


P06.03	Label	JOG trial run torque command			Valid mode(s)			T
	Range	0~350	Unit	%	Default	350		
	Byte length	16bit	Attribute	R/W	485 address	0x0607		
	Valid	Immediate						
	To set torque for JOG trial run command.							

P06.04	Label	JOG trial run velocity command			Valid mode(s)	P	S	T
	Range	0~10000	Unit	r/min	Default	30		
	Byte length	16bit	Attribute	R/W	485 address	0x0609		
	Valid	Immediate						
	To set velocity for JOG trial run command.							

P06.05	Label	Position 3rd gain valid time			Valid mode(s)	P		
	Range	0~10000	Unit	0.1ms	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x060B		
	Valid	Immediate						
	To set time for 3rd gain to be valid Only available in position mode When not in use, set P06.05=0, P06.06=100							

P06.06	Label	Position 3rd gain scale factor			Valid mode(s)	P		
	Range	50~1000	Unit	100%	Default	100		
	Byte length	16bit	Attribute	R/W	485 address	0x060D		
	Valid	Immediate						

Set up the 3rd gain by multiplying factor of the 1st gain

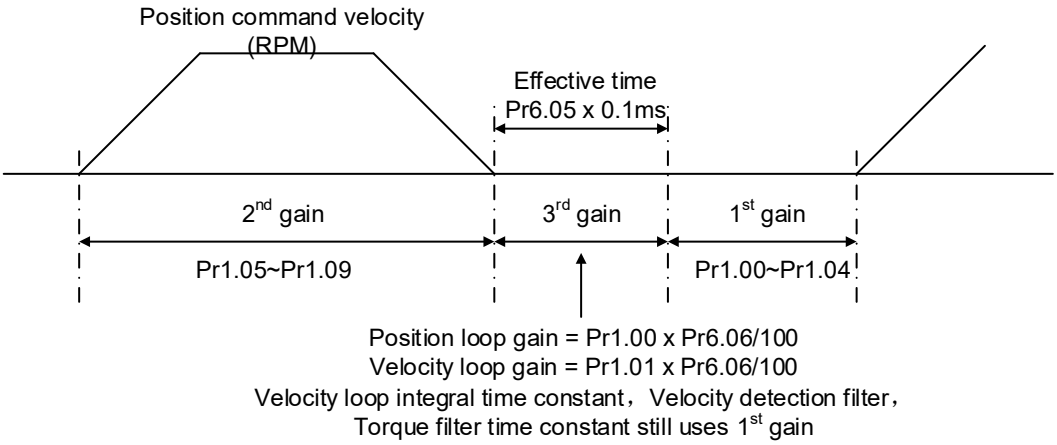

Above diagram is illustrated using P01.15 = 7.
3rd gain= 1st gain * P06.06/100
Only effective under position control mode. 3rd gain valid when P06.05 ≠ 0. Set 3rd gain value in P06.06. When 2nd gain switches to 1st gain, it will go through 3rd, and the switching time is set in P01.19.

P06.07	Label	Torque command additional value			Valid mode(s)	P	S	T
	Range	-100~100	Unit	%	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x060F		
	Valid	Immediate						

To set torque forward feed additional value of vertical axis.
Applicable for loaded vertical axis, compensate constant torque.
Application: When load moves along vertical axis, pick any point from the whole motion and stop the load at that particular point with motor enabled but not rotating. Record output torque value from d04, use that value as torque command additional value (compensation value)

P06.08	Label	Positive direction torque compensation value			Valid mode(s)	P	S	T
	Range	-100~100	Unit	%	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0611		
	Valid	Immediate						
P06.09	Label	Negative direction torque compensation value			Valid mode(s)	P	S	T
	Range	-100~100	Unit	%	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0613		
	Valid	Immediate						

To reduce the effect of mechanical friction in the movement(s) of the axis. Compensation values can be set according to needs for both rotational directions.

Applications:
1. When motor is at constant speed, d04 will deliver torque values.
Torque value in positive direction = T1
Torque value in negative direction = T2

P06.08/P06.09 = T_f = $\frac{|T1-T2|}{2}$

Positive/Negative compensation corresponds to actual position feedback.
Positive torque compensation value = +(P06.08=+T_f)
Negative torque compensation value = -(P06.08=+T_f)
P06.08 =x, P06.09=y; friction compensation value = |x-y|/2

P06.11	Label	Current response settings			Valid mode(s)	P	S	T
	Range	50~100	Unit	%	Default	100		
	Byte length	16bit	Attribute	R/W	485 address	0x0617		
	Valid	Immediate						
To set driver current loop related effective value ratio.								

P06.14	Label	Max. time to stop after disabling			Valid mode(s)	P	S	T
	Range	0~1000	Unit	ms	Default	500		
	Byte length	16bit	Attribute	R/W	485 address	0x061D		
	Valid	Immediate						

To set the max. time allowed for the axis to stop at the emergency stop or normal axis disabling.
After disabling axis, if motor speed is still higher than P04.39 but the time set in P06.14 is reached, BRK_ON given and holding brake activated.
BRK_ON given time is determined by P06.14 or when motor speed goes below P04.39, whichever comes first.

Applications:
1. After disabling axis, if motor speed is still higher than P04.39 but the time set in P06.14 is reached, BRK_ON given and holding brake activated.
2. After disabling axis, if motor speed is already lower than P04.39 but the time set in P06.14 is not yet reached, BRK_ON given and holding brake activated.

Dynamic brake will be providing the braking function if the function is activated for motors without holding brake.

P06.20	Label	Trial run distance			Valid mode(s)	P		
	Range	0~1200	Unit	0.1rev	Default	10		
	Byte length	16bit	Attribute	R/W	485 address	0x0629		
	Valid	Immediate						
JOG (Position control): Distance travel of each motion.								

P06.21	Label	Trial run waiting time			Valid mode(s)	P		
	Range	0~10000	Unit	ms	Default	300		
	Byte length	16bit	Attribute	R/W	485 address	0x062B		
	Valid	Immediate						
JOG (Position control): Waiting time interval after each motion cycle								

P06.22	Label	No. of trial run cycles			Valid mode(s)	P		
	Range	0~10000	Unit	—	Default	5		
	Byte length	16bit	Attribute	R/W	485 address	0x062D		
	Valid	Immediate						
JOG (Position control): No. of cycles When P06.22, trial run goes into endless cycles.								

P06.25	**Label**	Trial run acceleration			**Valid mode(s)**	**P**	**S**
	Range	0~10000	**Unit**	ms	**Default**	200	
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0633	
	Valid	Immediate					
	To set the acceleration/deceleration time for JOG command between 0 rpm to 1000 rpm						

P06.28	**Label**	Observer gain			**Valid mode(s)**	**P**	**S**
	Range	0~32767	**Unit**	%	**Default**	0	
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0639	
	Valid	Immediate					
	0：Default stable gain 1：OFF x：(unit：%) Manual, related to motor, load and encoder						
P06.29	**Label**	Observer filter			**Valid mode(s)**	**P**	**S**
	Range	0~32767	**Unit**	μs	**Default**	0	
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x063B	
	Valid	Immediate					
	0：Default stable observer filter 1：OFF x：(unit：μs) Manual, related to motor, load and encoder						

P06.56	**Label**	Blocked rotor alarm torque threshold			**Valid mode(s)**	**P**	**S**
	Range	0~300	**Unit**	%	**Default**	300	
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0671	
	Valid	Immediate					
	To set the torque threshold of blocked rotor to trigger alarm. (Alarm triggered if torque output is % larger than threshold value & under 10rpm) If P06.56 = 0, blocked rotor alarm deactivated. If motor speed is 10rpm or above, Er102 won't be triggered.						
P06.57	**Label**	Blocked rotor alarm delay time			**Valid mode(s)**	**P**	**S**
	Range	1~10000	**Unit**	ms	**Default**	400	
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x0673	
	Valid	Immediate					
	To set delay time for blocked rotor alarm. Err102 won't be triggered if time doesn't exceed set time in P06.57. Blocked rotor alarm is activated by default, alarm torque threshold = 300%, delay time = 400ms; speed threshold = 10rpm;						

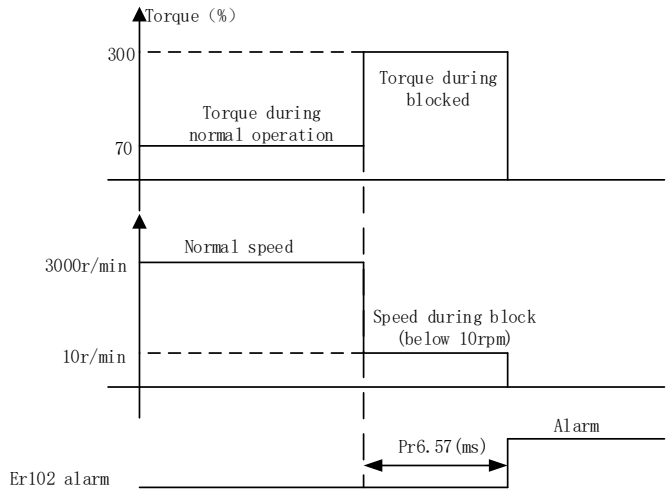


Diagram shows blocked rotor with speed under 10rpm

If the rotor is blocked but with speed over 10rpm, Er102 would not be triggered but Er100 might occur.

P06.63	Label	Absolute multiturn data upper limit			Valid mode(s)	P	S	T
	Range	0~32766	Unit	rev	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x067F		
	Valid	After restart						

Use P00.15 = 2 in rotational mode, Feedback position cycles between 0 and (P06.63+1) x encoder resolution.
Absolute multiturn data will be set to 0 if reaches upper limit.

[Class 7] Factory Settings

**Please take precaution when modifying Class 7 parameters. Might cause driver errors*

P07.15	Label	Motor model			Valid mode(s)	P	S	T
	Range	0x0~0x7FFF	Unit	—	Default	0x200		
	Byte length	16bit	Attribute	R/W	485 address	0x071F		
	Valid	After restart						

Value	Description
0x100	Read from EEPROM
[0x200]	Read from Encoder

When P07.15 = 0x200(2xx):

Parameter	Label
P07.00	Current loop gain
P07.01	Current loop integral time
P07.05	No. of motor pole pairs
P07.06	Motor phase resistance
P07.07	Motor D/Q induction
P07.08	Motor back EMF coefficient
P07.09	Motor torque coefficient
P07.10	Motor rated rotational speed
P07.11	Motor max. rotational speed
P07.12	Motor rated current
P07.13	Motor rotor inertia
P07.14	Driver power rating
P07.16	Encoder
P07.17	Motor max. current
P07.18	Encoder index angle compensation

P07.16	Label	Encoder			Valid mode(s)	P	S	T
	Range	0x0~0x200	Unit	—	Default	编码器决定		
	Byte length	16bit	Attribute	R/W	485 address	0x0721		

	Valid	After restart				

To select encoder type. Typically, encoder specifications are automatically read.

Value	Description
0x0	17-bit encoder
0x7	23-bit encoder

P07.54	**Label**	External grating ruler precision			**Valid mode(s)**	**P**	**S**	**T**
	Range	1~1000000	**Unit**	nm	**Default**	100		
	Byte length	16bit	**Attribute**	R/W	**485 address**	0x076D		
	Valid	After restart						

To select external grating ruler precision

[Class 8] PR Control Parameters

P08.00	**Label**	PR Control			**Valid mode(s)**	**PR**
	Range	0 ~ 65535	**Unit**	/	**Default**	0
	Byte length	16bit	**Attribute**	R/W	**485 address**	0X6000

It is recommended to modify PR control parameters using EDrive.

Bit	3	2	1	0
Description	=1, absolute value memory =0, absolute value with no memory	=1, homing upon power on =0, no homing upon power on	=1, software position limit valid =0, software position limit not valid	=0, CTRG rising edge trigger =1, double edges trigger

If parameter modifications are done through the front panel or parameters list, please keep in mind that PR control parameters byte is decimal system.
For example: If Bit 3, 2, 1, 0 are to be set to 1 (1111). Conversion using decimal system, 1111 = 15, P08.00 is to be set to 15.

P08.01	**Label**	Path count			**Valid mode(s)**	**PR**
	Range	16	**Unit**	/	**Default**	16
	Byte length	16bit	**Attribute**	R	**485 address**	0X6001

16 paths

P08.02	**Label**	Control Operation			**Valid mode(s)**	**PR**
	Range	0x0 ~ 0xFFFF	**Unit**	/	**Default**	0x0
	Byte length	16bit	**Attribute**	R/W	**485 address**	0X6002

Attributes of P08.02 functions are divided into Read/Write. P refers to positioning motion of *N* path. Please refer to the following table.

Attribute	Address	Description
Write	0x01P	*N* path positioning
Write	0x020	Reset
Write	0x021	Manually set currently position as 0 (Origin)
Write	0x040	Emergency stop
Read	0x000P	Positioning completed. Ready to receive new data
Read	0x01P, 0x020, 0x040	Yet to respond to command
Read	0x10P	Path motion undergoing
Read	0x200	Command completed. Waiting for positioning

P08.06	**Label**	Software positive limit H	**Valid mode(s)**	**PR**

	Range	0~ 65535	**Unit**	Pulse	**Default**	0
	Byte length	16bit	**Attribute**	R/W	**485 address**	0X6006
	High bit of software positive limit； (Only valid using 485 communication)					

P08.07	**Label**	Software positive limit (L)			**Valid mode(s)**	**PR**
	Range	-2147483648~ 2147483647	**Unit**	Pulse	**Default**	0
	Byte length	32bit	**Attribute**	R/W	**485 address**	0X6007
	To set software positive limit position (32 bit base) Using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P08.06 When software positive limit = 994817, 0x000F2E01(Hexadecimal) high16bit = 0x000F, hence P08.05 reading = 0x000F, controller = 15. R/W of high/low bit data is similar when using 485 communication.					
P08.08	**Label**	Software negative limit H			**Valid mode(s)**	**PR**
	Range	0~ 0x65535	**Unit**	Pulse	**Default**	0
	Byte length	16bit	**Attribute**	R/W	**485 address**	0X6008
	High bit of software negative limit； (Only valid using 485 communication)					
P08.09	**Label**	Software negative limit (L)			**Valid mode(s)**	**PR**
	Range	-2147483648~ 2147483647	**Unit**	Pulse	**Default**	0
	Byte length	32bit	**Attribute**	R/W	**485 address**	0X6009
	To set software positive limit position. Using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P08.08.					

P08.10	**Label**	Homing mode			**Valid mode(s)**	**PR**
	Range	0~ 0xFFFF	**Unit**	/	**Default**	0
	Byte length	16bit	**Attribute**	R/W	**485 address**	0X600A

To set homing method in PR mode. It is recommended to modify PR control parameters using EDrive.

Bit	8（Z-signal homing）	2-7（Homing mode）	1（Specific position after homing）	0（Homing direction）
Description	=1, homing with Z-signal =0, homing without Z-signal	=0 Limit homing =1 Origin homing =2 Single turn Z homing =3 Torque homing =8 Immediate homing	=1, Yes =0, No	=1, Forward =0, Reverse

P08.11	**Label**	Zero position H			**Valid mode(s)**	**PR**
	Range	0 ~ 65535	**Unit**	/	**Default**	0
	Byte length	16bit	**Attribute**	R/W	**485 address**	0X600B
	High bit of zero position; (Only valid using 485 communication)					

P08.10	Label	Homing mode			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X600A

To set homing method in PR mode. It is recommended to modify PR control parameters using EDrive.

Bit	8（Z-signal homing）	2-7（Homing mode）	1（Specific position after homing）	0（Homing direction）
Description	=1, homing with Z-signal =0, homing without Z-signal	=0 Limit homing =1 Origin homing =2 Single turn Z homing =3 Torque homing =8 Immediate homing	=1, Yes =0, No	=1, Forward =0, Reverse

P08.11	Label	Zero position H			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X600B

High bit of zero position; (Only valid using 485 communication)

P08.12	Label	Zero position (L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	p	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X600C

To set zero position.
Using 485 communication, only able to R/W low 16 bit.
R/W high 16 bit needs to be realized through P08.11.

P08.13	Label	Home position offset H			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X600D

High bit of home position offset; (Only valid using 485 communication)

P08.14	Label	Home position offset (L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	p	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X600E

To set home position offset.
Using 485 communication, only able to R/W low 16 bit.
R/W high 16 bit needs to be realized through P08.13.

P08.15	Label	High homing velocity			Valid mode(s)	PR
	Range	1 ~ 6000	Unit	rpm	Default	200
	Byte length	16bit	Attribute	R/W	485 address	0X600F

To set high homing velocity in PR mode.

P08.16	Label	Low homing velocity			Valid mode(s)	PR
	Range	1 ~ 6000	Unit	rpm	Default	50
	Byte length	16bit	Attribute	R/W	485 address	0X6010

To set low homing velocity in PR mode.

P08.17	Label	Homing acceleration			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6011
	To set homing acceleration time in PR mode, time needed for 0rpm to accelerate to 1000rpm					
P08.18	Label	Homing deceleration			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6012
	To set homing deceleration time in PR mode, time needed for 1000rpm to decelerate to 0rpm					
P08.19	Label	Homing torque holding time			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	ms	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6013
	To set homing torque holding time					
P08.20	Label	Homing torque			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	%	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6014
	To set homing torque					

P08.21	Label	Homing overtravel alarm range			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	0.1r	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6015
	To set homing overtravel alarm threshold.					

P08.22	Label	Emergency stop at limit deceleration			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	10
	Byte length	16bit	Attribute	R/W	485 address	0X6016
	To set position limit emergency stop deceleration.					
P08.23	Label	STP emergency stop deceleration			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	50
	Byte length	16bit	Attribute	R/W	485 address	0X6017
	To set STP emergency stop deceleration.					

P08.26	Label	I/O combination trigger mode			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X601A

Value	Description
【0】	Disable I/O combination trigger mode. Use I/O CTRG signal edge trigger.
1	Enable I/O combination trigger. Valid when HOME-OK signal is valid.
2	Enable I/O combination trigger. HOME-OK signal not required.

IO combination trigger select path using ADD0~ADD3. Trigger mode is set in P08.26.

ADD3	ADD2	ADD1	ADD0	Path selection
OFF	OFF	OFF	OFF	Path 0 (Non-action)
OFF	OFF	OFF	ON	Path1
OFF	OFF	ON	OFF	Path2
OFF	OFF	ON	ON	Path3
OFF	ON	OFF	OFF	Path4
OFF	ON	OFF	ON	Path5
OFF	ON	ON	OFF	Path6
OFF	ON	ON	ON	Path7
ON	OFF	OFF	OFF	Path8
ON	OFF	OFF	ON	Path9
ON	OFF	ON	OFF	Path10
ON	OFF	ON	ON	Path11
ON	ON	OFF	OFF	Path12
ON	ON	OFF	ON	Path13
ON	ON	ON	OFF	Path14
ON	ON	ON	ON	Path15

P08.27	Label	I/O combination filter			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	ms	Default	5
	Byte length	16bit	Attribute	R/W	485 address	0X601B


To set I/O combination filter time.

P08.28	Label	S-code current output value			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X601C

S-code（Status code）is the S-code of currently operating PR positioning data.
Every PR path has a S-code setting.

S-code	Sx.H		Sx.L	
Bit	15	8-14	7	0-6
Description	S-code valid when completed. 0: Invalid, retain previous value 1: Valid	S-code upon completion	S-code valid upon activation 0: Invalid 1: Valid	S-code upon activation

Sequence diagram

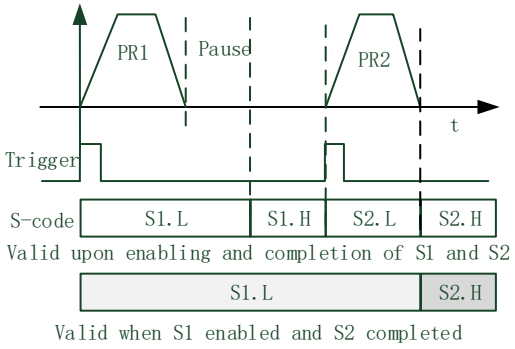

S-code bit	bit0/8	bit1/9	bit2/10	bit3/11	bit4/12	bit5/13	Bit6/14
SDx	SD0	SD1	SD2	SD3	SD4	SD5	SD6

P08.29	Label	PR warning			Valid mode(s)	PR
	Range	0x0~0x20F	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X601D

Address	Warning
0	Reset new command automatically
0x100	Position limit error during homing
0x101	Emergency stop. Homing not completed
0x102	Homing overtravel alarm
0x20x	Position limit error on Path *N*

P08.39	Label	JOG velocity			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	rpm	Default	100
	Byte length	16bit	Attribute	R	485 address	0X6027
Set JOG velocity in PR mode.						
P08.40	Label	JOG acceleration			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R	485 address	0X6028
Set JOG acceleration in PR mode.						

P08.41	Label	JOG deceleration			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R	485 address	0X6029
	Set JOG deceleration in PR mode.					

P08.42	Label	Command position H			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	
	Byte length	16bit	Attribute	R	485 address	0X602A
	High bit of command position; (Only valid using 485 communication)					
P08.43	Label	Command position（L）			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	p	Default	
	Byte length	32bit	Attribute	R	485 address	0X602B
	To set PR-motion command position. Using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P08.42.					
P08.44	Label	Motor position H			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	/	Default	
	Byte length	16bit	Attribute	R	485 address	0X602C
	High bit of command position; (Only valid using 485 communication)					
P08.45	Label	Motor position（L）			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	p	Default	
	Byte length	32bit	Attribute	R	485 address	0X602D
	Using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P08.44.					

P08.46	Label	Input I/O status			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	
	Byte length	16bit	Attribute	R	485 address	0X602E
	Input I/O status, displays in decimal system. Convert to binary system to determine which bit is valid.					
P08.47	Label	Output I/O status			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	
	Byte length	16bit	Attribute	R	485 address	0X602F
	Output I/O status, displays in decimal system. Convert to binary system to determine which bit is valid.					

P08.48	Label	Path 0 S-code			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6030
	Please refer to P08.28 for S-code setting.					

P08.49	Label	Path 1 S-code			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6031
	Please refer to P08.28 for S-code setting.					

P08.50	Label	Path 2 S-code			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6032
	Please refer to P08.28 for S-code setting.					

P08.51	Label	Path 3 S-code			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6033
	Please refer to P08.28 for S-code setting.					

P08.52	Label	Path 4 S-code			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6034
	Please refer to P08.28 for S-code setting.					

P08.53	Label	Path 5 S-code			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6035
	Please refer to P08.28 for S-code setting.					

P08.54	Label	Path 6 S-code			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6036
	Please refer to P08.28 for S-code setting.					

P08.55	Label	Path 7 S-code			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6037
	Please refer to P08.28 for S-code setting.					

P08.56	Label	Path 8 S-code			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6038
	Please refer to P08.28 for S-code setting.					

P08.57	Label	Path 9 S-code			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6039
	Please refer to P08.28 for S-code setting.					

P08.58	Label	Path 10 S-code			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X603A
	Please refer to P08.28 for S-code setting.					

P08.59	Label	Path 11 S-code			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X603B
	Please refer to P08.28 for S-code setting.					

P08.60	Label	Path 12 S-code			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X603C
	Please refer to P08.28 for S-code setting.					

P08.61	Label	Path 13 S-code			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X603D
	Please refer to P08.28 for S-code setting.					

P08.62	Label	Path 14 S-code			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X603E
	Please refer to P08.28 for S-code setting.					

P08.63	Label	Path 15 S-code			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X603F
	Please refer to P08.28 for S-code setting.					

[Class 9] PR Control Path Parameters

It is more convenient to set Class 9 parameters on EDrive

P09.00	Label	P00 mode			Valid mode(s)	PR
	Range	0x0~0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6200

Bit	14	8-13	6-7	5	4	0-3
Definition	0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0-15: Jump to correspond path	0: absolute 1: correspond command 2: correspond motor	0: No overlap, indicates with SJ 1 Overlap, indicated with CJ	0: Can be Interrupt 1: Can't be Interrupt, indicates using !	0: null 1: Positioning 2: Velocity motion 3: Homing 4: Emergency stop Indicates using P/V/H/S

P09.01	Label	P00 position H			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	Pulse	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6201
	High bit of Path 0 position; (Only valid using 485 communication)					

P09.02	Label	P00 position(L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	Pulse	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X6202
	For Path 0 position, using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P09.02.					

P09.03	Label	P00 velocity			Valid mode(s)	PR
	Range	-10000～10000	Unit	rpm	Default	60
	Byte length	16bit	Attribute	R/W	485 address	0X6203
	To set PR path 0 velocity.					

P09.04	Label	P00 acceleration time			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6204
	To set PR path 0 acceleration time, time needed for 0rpm to accelerate to 1000rpm					

P09.05	Label	P00 deceleration time			Valid mode(s)	PR
	Range	1 ~32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6205
	To set PR path 0 deceleration time, time needed for 1000rpm to decelerate to 0rpm					

P09.06	Label	P00 pause time			Valid mode(s)	PR
	Range	0 ~ 32767	Unit	ms	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6206
	To set pause time for PR path 0 from completion to next path					

P09.07	Label	P00 special parameter	Valid mode(s)	PR

	Range	0 ~ 65535	**Unit**	/	**Default**	0
	Byte length	16bit	**Attribute**	R	**485 address**	0X6207
	Reserved					

P09.08	**Label**	PR1 mode			**Valid mode(s)**	**PR**
	Range	0x0~0xFFFF	**Unit**	/	**Default**	0
	Byte length	16bit	**Attribute**	R/W	**485 address**	0X6208

Bit	14	8-13	6-7	5	4	0-3
Definition	0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0-15: Jump to correspond path	0: absolute 1: correspond command 2: correspond motor	0: No overlap, indicates with SJ 1 Overlap, indicated with CJ	0: Can be Interrupt 1: Can't be Interrupt, indicates using !	0: null 1: Positioning 2: Velocity motion 3: Homing 4: Emergency stop Indicates using P/V/H/S

P09.09	**Label**	PR1 position H			**Valid mode(s)**	**PR**
	Range	0~ 0xFFFF	**Unit**	Pulse	**Default**	0
	Byte length	16bit	**Attribute**	R/W	**485 address**	0X6209
	High bit of Path 1 position; (Only valid using 485 communication)					

P09.10	**Label**	PR1 position(L)			**Valid mode(s)**	**PR**
	Range	-2147483648~ 2147483647	**Unit**	Pulse	**Default**	0
	Byte length	32bit	**Attribute**	R/W	**485 address**	0X620A
	For Path position, using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P09.09.					

P09.11	**Label**	PR1 velocity			**Valid mode(s)**	**PR**
	Range	-10000～10000	**Unit**	rpm	**Default**	60
	Byte length	16bit	**Attribute**	R/W	**485 address**	0X620B
	To set PR path 1 velocity.					

P09.12	**Label**	PR1 acceleration time			**Valid mode(s)**	**PR**
	Range	1 ~ 32767	**Unit**	ms/Krpm	**Default**	100
	Byte length	16bit	**Attribute**	R/W	**485 address**	0X620C
	To set PR path 1 acceleration time, time needed for 0rpm to accelerate to 1000rpm					

P09.13	**Label**	PR1 deceleration time			**Valid mode(s)**	**PR**
	Range	1 ~32767	**Unit**	ms/Krpm	**Default**	100
	Byte length	16bit	**Attribute**	R/W	**485 address**	0X620D
	To set PR path 1 deceleration time, time needed for 1000rpm to decelerate to 0rpm					

P09.14	**Label**	PR1 pause time			**Valid mode(s)**	**PR**
	Range	0 ~ 32767	**Unit**	ms	**Default**	0
	Byte length	16bit	**Attribute**	R/W	**485 address**	0X620E
	To set pause time for PR path 2 from completion to next path					

P09.15	**Label**	PR1 special parameter			**Valid mode(s)**	**PR**
	Range	0 ~ 65535	**Unit**	/	**Default**	0
	Byte length	16bit	**Attribute**	R	**485 address**	0X620F
	Reserved					

P09.16	Label	PR2 mode			Valid mode(s)	PR
	Range	0x0~0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6210

Bit	14	8-13	6-7	5	4	0-3
Definition	0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0-15: Jump to correspond path	0: absolute 1: correspond command 2: correspond motor	0: No overlap, indicates with SJ 1 Overlap, indicated with CJ	0: Can be Interrupt 1: Can't be Interrupt, indicates using !	0: null 1: Positioning 2: Velocity motion 3: Homing 4: Emergency stop Indicates using P/V/H/S

P09.17	Label	PR2 position H			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	Pulse	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6211
	High bit of Path 2 position; (Only valid using 485 communication)					

P09.18	Label	PR2 position(L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	Pulse	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X6212
	For Path 2 position, using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P09.17.					

P09.19	Label	PR2 velocity			Valid mode(s)	PR
	Range	-10000～10000	Unit	rpm	Default	60
	Byte length	16bit	Attribute	R/W	485 address	0X6213
	To set PR path 2 velocity.					

P09.20	Label	PR2 acceleration time			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6214
	To set PR path 2 acceleration time, time needed for 0rpm to accelerate to 1000rpm					

P09.21	Label	PR2 deceleration time			Valid mode(s)	PR
	Range	1 ~32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6215
	To set PR path 2 deceleration time, time needed for 1000rpm to decelerate to 0rpm					

P09.22	Label	PR2 pause time			Valid mode(s)	PR
	Range	0 ~ 32767	Unit	ms	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6216
	To set pause time for PR path 2 from completion to next path					

P09.23	Label	PR2 special parameter			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6217
	Reserved					

P09.24	Label	PR3 mode			Valid mode(s)	PR
	Range	0x0~0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6218

Bit	14	8-13	6-7	5	4	0-3
Definition	0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0-15: Jump to correspond path	0: absolute 1: correspond command 2: correspond motor	0: No overlap, indicates with SJ 1 Overlap, indicated with CJ	0: Can be Interrupt 1: Can't be Interrupt, indicates using !	0: null 1: Positioning 2: Velocity motion 3: Homing 4: Emergency stop Indicates using P/V/H/S

P09.25	Label	PR3 position H			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	Pulse	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6219
	High bit of Path 3 position; (Only valid using 485 communication)					

P09.26	Label	PR3 position(L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	Pulse	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X621A
	For Path 3 position, using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P09.25.					

P09.27	Label	PR3 velocity			Valid mode(s)	PR
	Range	-10000～10000	Unit	rpm	Default	60
	Byte length	16bit	Attribute	R/W	485 address	0X621B
	To set PR path 3 velocity.					

P09.28	Label	PR3 acceleration time			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X621C
	To set PR path 3 acceleration time, time needed for 0rpm to accelerate to 1000rpm					

P09.29	Label	PR3 deceleration time			Valid mode(s)	PR
	Range	1 ~32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X621D
	To set PR path 0 deceleration time, time needed for 1000rpm to decelerate to 0rpm					

P09.30	Label	PR3 pause time			Valid mode(s)	PR
	Range	0 ~ 32767	Unit	ms	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X621E
	To set pause time for PR path 3 from completion to next path					

P09.31	Label	PR3 special parameter			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X621F
	Reserved					

P09.32	Label	PR4 mode			Valid mode(s)	PR
	Range	0x0~0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6220

Bit	14	8-13	6-7	5	4	0-3
Definition	0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0-15: Jump to correspond path	0: absolute 1: correspond command 2: correspond motor	0: No overlap, indicates with SJ 1 Overlap, indicated with CJ	0: Can be Interrupt 1: Can't be Interrupt, indicates using !	0: null 1: Positioning 2: Velocity motion 3: Homing 4: Emergency stop Indicates using P/V/H/S

P09.33	Label	PR4 position H			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	Pulse	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6221
	High bit of Path 0 position; (Only valid using 485 communication)					

P09.34	Label	PR4 position(L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	Pulse	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X6222
	For Path 4 position, using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P09.33.					

P09.35	Label	PR4 velocity			Valid mode(s)	PR
	Range	-10000～10000	Unit	rpm	Default	60
	Byte length	16bit	Attribute	R/W	485 address	0X6223
	To set PR path 4 velocity.					

P09.36	Label	P00 acceleration time			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6224
	To set PR path 4 acceleration time, time needed for 0rpm to accelerate to 1000rpm					

P09.37	Label	PR4deceleration time			Valid mode(s)	PR
	Range	1 ~32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6225
	To set PR path 4 deceleration time, time needed for 1000rpm to decelerate to 0rpm					

P09.38	Label	PR4 pause time			Valid mode(s)	PR
	Range	0 ~ 32767	Unit	ms	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6226
	To set pause time for PR path 4 from completion to next path					

P09.39	Label	PR4 special parameter			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6227
	Reserved					

P09.40	Label	PR5 mode			Valid mode(s)	PR
	Range	0x0~0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6228

Bit	14	8-13	6-7	5	4	0-3
Definition	0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0-15: Jump to correspond path	0: absolute 1: correspond command 2: correspond motor	0: No overlap, indicates with SJ 1 Overlap, indicated with CJ	0: Can be Interrupt 1: Can't be Interrupt, indicates using !	0: null 1: Positioning 2: Velocity motion 3: Homing 4: Emergency stop Indicates using P/V/H/S

P09.41	Label	PR5 position H			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	Pulse	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6229
	High bit of Path 5 position; (Only valid using 485 communication)					

P09.42	Label	PR5 position(L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	Pulse	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X622A
	For Path 0 position, using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P09.41.					

P09.43	Label	PR5 velocity			Valid mode(s)	PR
	Range	-10000～10000	Unit	rpm	Default	60
	Byte length	16bit	Attribute	R/W	485 address	0X622B
	To set PR path 5 velocity.					

P09.44	Label	PR5 acceleration time			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X622C
	To set PR path 5 acceleration time, time needed for 0rpm to accelerate to 1000rpm					

P09.45	Label	PR5 deceleration time			Valid mode(s)	PR
	Range	1 ~32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X622D
	To set PR path 5 deceleration time, time needed for 1000rpm to decelerate to 0rpm					

P09.46	Label	PR5 pause time			Valid mode(s)	PR
	Range	0 ~ 32767	Unit	ms	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X622E
	To set pause time for PR path 5 from completion to next path					

P09.47	Label	PR5 special parameter			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X622F
	Reserved					

P09.48	Label	PR6 mode			Valid mode(s)	PR
	Range	0x0~0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6230

Bit	14	8-13	6-7	5	4	0-3
Definition	0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0-15: Jump to correspond path	0: absolute 1: correspond command 2: correspond motor	0: No overlap, indicates with SJ 1 Overlap, indicated with CJ	0: Can be Interrupt 1: Can't be Interrupt, indicates using !	0: null 1: Positioning 2: Velocity motion 3: Homing 4: Emergency stop Indicates using P/V/H/S

P09.49	Label	PR6 position H			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	Pulse	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6231
	High bit of Path 6 position; (Only valid using 485 communication)					

P09.50	Label	PR6 position(L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	Pulse	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X6232
	For Path 6 position, using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P09.49.					

P09.51	Label	PR6 velocity			Valid mode(s)	PR
	Range	-10000～10000	Unit	rpm	Default	60
	Byte length	16bit	Attribute	R/W	485 address	0X6233
	To set PR path 6 velocity.					

P09.52	Label	PR6 acceleration time			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6234
	To set PR path 6 acceleration time, time needed for 0rpm to accelerate to 1000rpm					

P09.53	Label	PR6 deceleration time			Valid mode(s)	PR
	Range	1 ~32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6235
	To set PR path 6 deceleration time, time needed for 1000rpm to decelerate to 0rpm					

P09.54	Label	PR6 pause time			Valid mode(s)	PR
	Range	0 ~ 32767	Unit	ms	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6236
	To set pause time for PR path 6 from completion to next path					

P09.55	Label	PR6 special parameter			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6237
	Reserved					

P09.56	Label	PR7 mode			Valid mode(s)	PR
	Range	0x0~0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6238

Bit	14	8-13	6-7	5	4	0-3
Definition	0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0-15: Jump to correspond path	0: absolute 1: correspond command 2: correspond motor	0: No overlap, indicates with SJ 1 Overlap, indicated with CJ	0: Can be Interrupt 1: Can't be Interrupt, indicates using !	0: null 1: Positioning 2: Velocity motion 3: Homing 4: Emergency stop Indicates using P/V/H/S

P09.57	Label	PR7 position H			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	Pulse	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6239
	High bit of Path 7 position; (Only valid using 485 communication)					

P09.58	Label	PR7 position(L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	Pulse	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X623A
	For Path 7 position, using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P09.57.					

P09.59	Label	PR7 velocity			Valid mode(s)	PR
	Range	-10000～10000	Unit	rpm	Default	60
	Byte length	16bit	Attribute	R/W	485 address	0X623B
	To set PR path 7 velocity.					

P09.60	Label	PR7 acceleration time			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X623C
	To set PR path 7 acceleration time, time needed for 0rpm to accelerate to 1000rpm					

P09.61	Label	P00 deceleration time			Valid mode(s)	PR
	Range	1 ~32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X623D
	To set PR path 0 deceleration time, time needed for 1000rpm to decelerate to 0rpm					

P09.62	Label	PR7 pause time			Valid mode(s)	PR
	Range	0 ~ 32767	Unit	ms	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X623E
	To set pause time for PR path 7 from completion to next path					

P09.63	Label	PR7 special parameter			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X623F
	Reserved					

P09.64	Label	PR8 mode			Valid mode(s)	PR
	Range	0x0~0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6240

Bit	14	8-13	6-7	5	4	0-3
Definition	0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0-15: Jump to correspond path	0: absolute 1: correspond command 2: correspond motor	0: No overlap, indicates with SJ 1 Overlap, indicated with CJ	0: Can be Interrupt 1: Can't be Interrupt, indicates using !	0: null 1: Positioning 2: Velocity motion 3: Homing 4: Emergency stop Indicates using P/V/H/S

P09.65	Label	PR8 position H			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	Pulse	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6241
	High bit of Path 0 position; (Only valid using 485 communication)					

P09.66	Label	PR8 position(L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	Pulse	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X6242
	For Path 8 position, using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P09.65.					

P09.67	Label	PR8 velocity			Valid mode(s)	PR
	Range	-10000～10000	Unit	rpm	Default	60
	Byte length	16bit	Attribute	R/W	485 address	0X6243
	To set PR path 8 velocity.					

P09.68	Label	PR8 acceleration time			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6244
	To set PR path 8 acceleration time, time needed for 0rpm to accelerate to 1000rpm					

P09.69	Label	PR8 deceleration time			Valid mode(s)	PR
	Range	1 ~32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6245
	To set PR path 8 deceleration time, time needed for 1000rpm to decelerate to 0rpm					

P09.70	Label	PR8 pause time			Valid mode(s)	PR
	Range	0 ~ 32767	Unit	ms	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6246
	To set pause time for PR path 8 from completion to next path					

P09.71	Label	PR8 special parameter			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6247
	Reserved					

P09.72	Label	PR9 mode			Valid mode(s)	PR
	Range	0x0~0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6248

Bit	14	8-13	6-7	5	4	0-3
Definition	0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0-15: Jump to correspond path	0: absolute 1: correspond command 2: correspond motor	0: No overlap, indicates with SJ 1 Overlap, indicated with CJ	0: Can be Interrupt 1: Can't be Interrupt, indicates using !	0: null 1: Positioning 2: Velocity motion 3: Homing 4: Emergency stop Indicates using P/V/H/S

P09.73	Label	PR9 position H			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	Pulse	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6249
	High bit of Path 9 position; (Only valid using 485 communication)					

P09.74	Label	PR9 position(L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	Pulse	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X624A
	For Path 9 position, using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P09.73.					

P09.75	Label	P00 velocity			Valid mode(s)	PR
	Range	-10000～10000	Unit	rpm	Default	60
	Byte length	16bit	Attribute	R/W	485 address	0X624B
	To set PR path 0 velocity.					

P09.76	Label	PR9 acceleration time			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X624C
	To set PR path 9 acceleration time, time needed for 0rpm to accelerate to 1000rpm					

P09.77	Label	PR9 deceleration time			Valid mode(s)	PR
	Range	1 ~32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X624D
	To set PR path 9 deceleration time, time needed for 1000rpm to decelerate to 0rpm					

P09.78	Label	PR9 pause time			Valid mode(s)	PR
	Range	0 ~ 32767	Unit	ms	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X624E
	To set pause time for PR path 9 from completion to next path					

P09.79	Label	PR9 special parameter			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X624F
	Reserved					

P09.80	Label	PR10 mode			Valid mode(s)	PR
	Range	0x0~0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6250

Bit	14	8-13	6-7	5	4	0-3
Definition	0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0-15: Jump to correspond path	0: absolute 1: correspond command 2: correspond motor	0: No overlap, indicates with SJ 1 Overlap, indicated with CJ	0: Can be Interrupt 1: Can't be Interrupt, indicates using !	0: null 1: Positioning 2: Velocity motion 3: Homing 4: Emergency stop Indicates using P/V/H/S

P09.81	Label	PR10 position H			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	Pulse	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6251
	High bit of Path10 position; (Only valid using 485 communication)					

P09.82	Label	PR10 position(L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	Pulse	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X6252
	For Path 10 position, using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P09.81.					

P09.83	Label	PR10 velocity			Valid mode(s)	PR
	Range	-10000～10000	Unit	rpm	Default	60
	Byte length	16bit	Attribute	R/W	485 address	0X6253
	To set PR path 10 velocity.					

P09.84	Label	PR10 acceleration time			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6254
	To set PR path 10 acceleration time, time needed for 0rpm to accelerate to 1000rpm					

P09.85	Label	PR10 deceleration time			Valid mode(s)	PR
	Range	1 ~32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6255
	To set PR path 10 deceleration time, time needed for 1000rpm to decelerate to 0rpm					

P09.86	Label	PR10 pause time			Valid mode(s)	PR
	Range	0 ~ 32767	Unit	ms	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6256
	To set pause time for PR path 10 from completion to next path					

P09.87	Label	PR10 special parameter			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6257
	Reserved					

P09.88	Label	PR11 mode			Valid mode(s)	PR
	Range	0x0~0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6258

Bit	14	8-13	6-7	5	4	0-3
Definition	0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0-15: Jump to correspond path	0: absolute 1: correspond command 2: correspond motor	0: No overlap, indicates with SJ 1 Overlap, indicated with CJ	0: Can be Interrupt 1: Can't be Interrupt, indicates using !	0: null 1: Positioning 2: Velocity motion 3: Homing 4: Emergency stop Indicates using P/V/H/S

P09.89	Label	PR11 position H			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	Pulse	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6259
	High bit of Path 11 position; (Only valid using 485 communication)					

P09.90	Label	PR11 position(L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	Pulse	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X625A
	For Path 11 position, using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P09.89.					

P09.91	Label	PR11 velocity			Valid mode(s)	PR
	Range	-10000～10000	Unit	rpm	Default	60
	Byte length	16bit	Attribute	R/W	485 address	0X625B
	To set PR path 11 velocity.					

P09.92	Label	PR11 acceleration time			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X625C
	To set PR path 11 acceleration time, time needed for 0rpm to accelerate to 1000rpm					

P09.93	Label	PR11 deceleration time			Valid mode(s)	PR
	Range	1 ~32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X625D
	To set PR path 11 deceleration time, time needed for 1000rpm to decelerate to 0rpm					

P09.94	Label	PR11 pause time			Valid mode(s)	PR
	Range	0 ~ 32767	Unit	ms	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X625E
	To set pause time for PR path 11 from completion to next path					

P09.95	Label	PR11 special parameter			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X625F
	Reserved					

P09.96	Label	PR12 mode			Valid mode(s)	PR
	Range	0x0~0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6260

Bit	14	8-13	6-7	5	4	0-3
Definition	0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0-15: Jump to correspond path	0: absolute 1: correspond command 2: correspond motor	0: No overlap, indicates with SJ 1 Overlap, indicated with CJ	0: Can be Interrupt 1: Can't be Interrupt, indicates using !	0: null 1: Positioning 2: Velocity motion 3: Homing 4: Emergency stop Indicates using P/V/H/S

P09.97	Label	PR12 position H			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	Pulse	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6261
	High bit of Path 12 position; (Only valid using 485 communication)					

P09.98	Label	PR12 position(L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	Pulse	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X6262
	For Path 12 position, using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P09.97.					

P09.99	Label	PR12 velocity			Valid mode(s)	PR
	Range	-10000～10000	Unit	rpm	Default	60
	Byte length	16bit	Attribute	R/W	485 address	0X6263
	To set PR path 12 velocity.					

P09.100	Label	PR12 acceleration time			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6264
	To set PR path 12 acceleration time, time needed for 0rpm to accelerate to 1000rpm					

P09.101	Label	PR12 deceleration time			Valid mode(s)	PR
	Range	1 ~32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6265
	To set PR path 12 deceleration time, time needed for 1000rpm to decelerate to 0rpm					

P09.102	Label	PR12 pause time			Valid mode(s)	PR
	Range	0 ~ 32767	Unit	ms	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6266
	To set pause time for PR path 12 from completion to next path					

P09.103	Label	PR12 special parameter			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6267
	Reserved					

P09.104	Label	PR13 mode			Valid mode(s)	PR
	Range	0x0~0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6268

Bit	14	8-13	6-7	5	4	0-3
Definition	0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0-15: Jump to correspond path	0: absolute 1: correspond command 2: correspond motor	0: No overlap, indicates with SJ 1 Overlap, indicated with CJ	0: Can be Interrupt 1: Can't be Interrupt, indicates using !	0: null 1: Positioning 2: Velocity motion 3: Homing 4: Emergency stop Indicates using P/V/H/S

P09.105	Label	PR13 position H			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	Pulse	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6269
	High bit of Path 13 position; (Only valid using 485 communication)					

P09.106	Label	PR13 position(L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	Pulse	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X626A
	For Path 13 position, using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P09.105.					

P09.107	Label	PR13 velocity			Valid mode(s)	PR
	Range	-10000～10000	Unit	rpm	Default	60
	Byte length	16bit	Attribute	R/W	485 address	0X626B
	To set PR path 13 velocity.					

P09.108	Label	PR13 acceleration time			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X626C
	To set PR path 13 acceleration time, time needed for 0rpm to accelerate to 1000rpm					

P09.109	Label	PR13 deceleration time			Valid mode(s)	PR
	Range	1 ~32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X626D
	To set PR path 13 deceleration time, time needed for 1000rpm to decelerate to 0rpm					

P09.110	Label	PR13 pause time			Valid mode(s)	PR
	Range	0 ~ 32767	Unit	ms	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X626E
	To set pause time for PR path 13 from completion to next path					

P09.111	Label	PR13 special parameter			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X626F
	Reserved					

P09.112	Label	PR14 mode			Valid mode(s)	PR
	Range	0x0~0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6270

Bit	14	8-13	6-7	5	4	0-3
Definition	0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0-15: Jump to correspond path	0: absolute 1: correspond command 2: correspond motor	0: No overlap, indicates with SJ 1 Overlap, indicated with CJ	0: Can be Interrupt 1: Can't be Interrupt, indicates using !	0: null 1: Positioning 2: Velocity motion 3: Homing 4: Emergency stop Indicates using P/V/H/S

P09.113	Label	PR14 position H			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	Pulse	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6271
	High bit of Path 14 position; (Only valid using 485 communication)					

P09.114	Label	PR14 position(L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	Pulse	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X6272
	For Path 14 position, using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P09.113.					

P09.115	Label	PR14 velocity			Valid mode(s)	PR
	Range	-10000～10000	Unit	rpm	Default	60
	Byte length	16bit	Attribute	R/W	485 address	0X6273
	To set PR path 14 velocity.					

P09.116	Label	PR14 acceleration time			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6274
	To set PR path 14 acceleration time, time needed for 0rpm to accelerate to 1000rpm					

P09.117	Label	PR14 deceleration time			Valid mode(s)	PR
	Range	1 ~32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X6275
	To set PR path 14 deceleration time, time needed for 1000rpm to decelerate to 0rpm					

P09.118	Label	PR14 pause time			Valid mode(s)	PR
	Range	0 ~ 32767	Unit	ms	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6276
	To set pause time for PR path 14 from completion to next path					

P09.119	Label	PR14 special parameter			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X6277
	Reserved					

P09.120	Label	PR15 mode			Valid mode(s)	PR
	Range	0x0~0xFFFF	Unit	/	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6278

Bit	14	8-13	6-7	5	4	0-3
Definition	0: No Jump, indicates with END 1: Jump. Jump to SJ or CJ	0-15: Jump to correspond path	0: absolute 1: correspond command 2: correspond motor	0: No overlap, indicates with SJ 1 Overlap, indicated with CJ	0: Can be Interrupt 1: Can't be Interrupt, indicates using !	0: null 1: Positioning 2: Velocity motion 3: Homing 4: Emergency stop Indicates using P/V/H/S

P09.121	Label	PR15 position H			Valid mode(s)	PR
	Range	0~ 0xFFFF	Unit	Pulse	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X6279
	High bit of Path 15 position; (Only valid using 485 communication)					

P09.122	Label	PR15 position(L)			Valid mode(s)	PR
	Range	-2147483648~ 2147483647	Unit	Pulse	Default	0
	Byte length	32bit	Attribute	R/W	485 address	0X627A
	For Path 15 position, using 485 communication, only able to R/W low 16 bit. R/W high 16 bit needs to be realized through P09.121.					

P09.123	Label	PR15 velocity			Valid mode(s)	PR
	Range	-10000～10000	Unit	rpm	Default	60
	Byte length	16bit	Attribute	R/W	485 address	0X627B
	To set PR path 15 velocity.					

P09.124	Label	PR15 acceleration time			Valid mode(s)	PR
	Range	1 ~ 32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X627C
	To set PR path 15 acceleration time, time needed for 0rpm to accelerate to 1000rpm					

P09.125	Label	PR15 deceleration time			Valid mode(s)	PR
	Range	1 ~32767	Unit	ms/Krpm	Default	100
	Byte length	16bit	Attribute	R/W	485 address	0X627D
	To set PR path 15 deceleration time, time needed for 1000rpm to decelerate to 0rpm					

P09.126	Label	PR15 pause time			Valid mode(s)	PR
	Range	0 ~ 32767	Unit	ms	Default	0
	Byte length	16bit	Attribute	R/W	485 address	0X627E
	To set pause time for PR path 15 from completion to next path					

P09.127	Label	PR15 special parameter			Valid mode(s)	PR
	Range	0 ~ 65535	Unit	/	Default	0
	Byte length	16bit	Attribute	R	485 address	0X627F
	Reserved					

[Class C] Position Comparison

P0C.00	Label	Enable Position Comparison			Valid mode(s)	P	S	T
	Range	0~3	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0C01		
	Valid	Immediate						

Value	Description
0	Disable
1	Enable (Rising edge valid)

P0C.01	Label	Position Comparison Mode			Valid mode(s)	P	S	T
	Range	0~255	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0C03		
	Valid	Re-enable						

Value	Description
0	Absolute mode
1	Relevant mode

P0C.02	Label	Position Comparison Pulse Output Bandwidth			Valid mode(s)	P		
	Range	0~4095	Unit	0.1ms	Default	1		
	Byte length	16bit	Attribute	R/W	485 address	0x0C05		
	Valid	Immediate						

Set the pulse width of the signal output when the position comparison point is reached, in milliseconds (ms).

P0C.03	Label	Position Comparison Output Delay			Valid mode(s)	P		
	Range	-10000 ~10000	Unit	0.1us	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x0C07		
	Valid	Restart						

Set the delay compensation for position comparison output. This compensates for delays caused by the DO/division output circuit.

P0C.04	Label	Position Comparison Starting Point			Valid mode(s)	P		
	Range	1~42	Unit	-	Default	1		
	Byte length	16bit	Attribute	R/W	485 address	0x0C09		
	Valid	Immediate						

Set the starting point for position comparison.

P0C.05	Label	Position Comparison End Point			Valid mode(s)	P		
	Range	1~42	Unit	-	Default	1		
	Byte length	16bit	Attribute	R/W	485 address	0x2C0B		
	Valid	Immediate						

Set the ending point for position comparison.

P0C.06	Label	No. of cycle for N-cycle Comparison			Valid mode(s)	P		
	Range	0~50000	Unit	-	Default	1		
	Byte length	16bit	Attribute	R/W	485 address	0x2C0D		
	Valid	Immediate						
Set the number of cycles for position comparison in constant cycle mode.								

P0C.07	Label	Position Comparison - Set Current Position as Origin			Valid mode(s)	P		
	Range	0~1	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x2C0F		
	Valid	Immediate						

Set the zero point for position comparison. When the rising edge is enabled, the current position can be set as the zero point.

Value	Description
0	Disable
1	Enable (Rising edge valid)

P0C.08	Label	Position Comparison - Offset to Origin			Valid mode(s)	P	S	T
	Range	1~50000	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x2C11		
	Valid	Immediate						
Set the position offset after setting the current position as the zero point for position comparison.								

P0C.20~ P0C.61	Label	Position Comparison 1 Target Value			Valid mode(s)	P	S	T
	Range	$-2^{31} \sim 2^{31}$	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x2C28~0x2C7B		
	Valid	Immediate						

Set the target values for position comparison points 1 to 42. When the position reaches a comparison point, the output is determined based on the attribute values of comparison points 1 to 42.

P0C.70	Label	Position Comparison 1 & 2 Attribute Value			Valid mode(s)	P	S	T
	Range	$-2^{31} \sim 2^{31}-1$	Unit	-	Default	0x2C8D		
	Byte length	16bit	Attribute	R/W	485 address	-		
	Valid	Immediate						

Set the attribute values for position comparison points 1 and 2 (bit 0–15 for point 1 attributes):

bit	Position Comparison Point 1 Attributes
0	= 0 No forward crossing comparison; = 1 Forward crossing comparison
1	= 0 No reverse crossing comparison; = 1 Reverse crossing comparison
2~5	Reserved
6	Output mode setting: = 0 Pulse mode; = 1 Toggle mode
7	DO1 output
8	DO2 output
9	DO3 output
10~12	Reserved
13	Divided A-phase output
14	Divided B-phase output
15	Divided Z-phase output

Bit 16–31 for Position Comparison Point 2 Attributes:

bit	Position Comparison Point 2 Attributes
16	= 0 No forward crossing comparison; = 1 Forward crossing comparison
17	= 0 No reverse crossing comparison; = 1 Reverse crossing comparison
18~21	Reserved
22	Output mode setting: = 0 Pulse mode; = 1 Toggle mode
23	DO1 output
24	DO2 output
25	DO3 output
26~28	Reserved
29	Divided A-phase output
30	Divided B-phase output
31	Divided Z-phase output

[Class D] Gantry Settings

P0D.00	Label	Gantry Configuration			Valid mode(s)	P	S	T
	Range	0~7	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x2D01		
	Valid	Restart						

Bit 0: Gantry function switch — 0: Off, 1: On
Bit 1: Master/Slave axis switch — 0: Slave axis, 1: Master axis
Bit 2: PWM synchronization switch — 0: Sync off, 1: Sync on
(Master axis should have sync off; slave axis should have sync on)
Bit 3: Slave axis partial parameter sync control bit
0: Synchronized
1: Not synchronized
Note:
Setting value 3: Gantry master axis is active
Setting value 5: Gantry slave axis is active

P0D.01	Label	Gantry Slave Axis Command Mode			Valid mode(s)	P	S	T
	Range	0~1	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x2D03		
	Valid	Re-enable						

0: Torque (force) command synchronization
1: Position command synchronization

P0D.02	Label	Gantry Gain 1			Valid mode(s)	P	S	T
	Range	1~300	Unit	-	Default	100		
	Byte length	16bit	Attribute	R/W	485 address	0x2D05		
	Valid	Re-enable						

Gantry Synchronization Feedback Compensation Gain. Only effective in position command synchronization mode
0: Gain is 0 — equivalent to center position feedback; minimal torque deviation, maximum position deviation
100: Default value — 100% gain; balances torque and position deviation
1–100: For rigid gantry systems — lower values reduce torque deviation during motion
100–300: For flexible gantry systems — higher values reduce position deviation during motion

P0D.03	Label	Gantry Position Synchronization Deviation Threshold			Valid mode(s)	P	S	T
	Range	0-67108864	Unit	-	Default	10000		
	Byte length	32bit	Attribute	R/W	485 address	0X2D06~0X2D07		
	Valid	Immediate						
0: Suppress position synchronization deviation alarm								

P0D.04	Label	Gantry Torque Deviation Threshold			Valid mode(s)	P	S	T
	Range	0~5000	Unit	-	Default	500		
	Byte length	16bit	Attribute	R/W	485 address	0x2D09		
	Valid	Immediate						
0: Suppress torque synchronization deviation alarm								

P0D.05	Label	Gantry Tuning Gain 2			Valid mode(s)	P	S	T
	Range	0~1000	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x2D0B		
	Valid	Immediate						
Co-motion Controller Parameters. Only effective in position command synchronization mode. 0: Disable torque deviation suppression 1–1000: Higher values improve suppression of torque deviation but reduce the maximum gain of the speed loop Typically enabled in rigid gantry systems. If high speed loop gain is required, avoid setting this value too high. Can be used in conjunction with P06.73 to suppress torque deviation								

P0D.06	Label	Position Gain			Valid mode(s)	P	S	T
	Range	0~32767	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x2D0D		
	Valid	Immediate						

P0D.07	Label	Velocity Gain			Valid mode(s)	P	S	T
	Range	0~32767	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x2D0F		
	Valid	Immediate						

P0D.08	Label	Velocity Integral			Valid mode(s)	P	S	T
	Range	0~32767	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	0x2D11		
	Valid	Immediate						

P0D.09	Label	Torque Balance Controller Enables Torque Threshold			Valid mode(s)	P	S	T
	Range	0~1	Unit	-	Default	0		
	Byte length	-	Attribute	R/W	485 address	0X2D13		
	Valid	Immediate						

P0D.10	Label	Homing Method			Valid mode(s)	P	S	T
	Range	0~1	Unit	-	Default	0		
	Byte length	-	Attribute	R/W	485 address	0X2D15		
	Valid	Immediate						


P0D.11	Label	Alignment Mode			Valid mode(s)	P	S	T
	Range	0~4	Unit	-	Default	0		
	Byte length	16bit	Attribute	R/W	485 address	H: 0x2D16 L: 0x2D17		
	Valid	Immediate						
Offset value must be less than 1/4 of a rotation. If greater than 1/4, alarm A1B will be triggered. IO-triggered operation: Slave axis remains stationary, master axis moves the offset distance. Currently only effective in torque command synchronization mode.								

Appendix II - Warning and Alarm

Servo Driver Warning

When warning occurs, driver will set protective function, but **motor won't stop moving**. Error code will be displayed on the front panel.


Example of warning code:

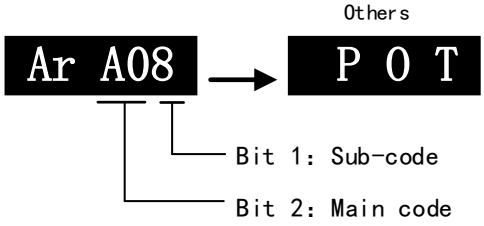

Warning Code		Content
Main	Code	
A0	1	Overload warning
	2	Regeneration energy overload warning(**85% of the regeneration threshold**)
	3	Absolute encoder **battery voltage low (<3.1V)**. Valid when Pr0.15 is set to 1.
	4	Change the parameter to a non-real time valid warning
	7	Low temperature warning **(< 20℃)**
	8	Positive limit switch valid. **POT** blinking on front panel
	9	Negative limit switch valid. **NOT** blinking on front panel
	A	Positive and negative limit switch valid. **PNOT** blinking on front panel
	B	Current position is beyond software positive limit. **SPOT** blinking on front panel
	C	Current position is beyond software negative limit. **NPOT** blinking on front panel
	D	Current position is beyond software negative, positive limit. **SPNOT** blinking on front panel
	E	Parameters reset to factory default. Restart needed
Ar	15	Communication fault when gantry is disabled
	16	Gantry axis fault, other axis warning Ar16
	17	Gantry axis emergency stop signal active, other axis warning Ar17
	18	Gantry axis limit active, other axis warning Ar18
	19	Slave axis PWM synchronization alarm when gantry is disabled
	1A	Gantry communication error too high
	1B	Gantry-related parameter settings error (gantry alignment offset setting exceeds 1/4 pulse, spindle warning Ar1b)

Servo Driver Alarm


When alarm occurs, driver will set protective function and **motor stops moving**. Error code will be displayed on the front panel. Alarm history records can also be viewed in data monitoring mode, with the alarm log sub-menu displaying "d12Er".

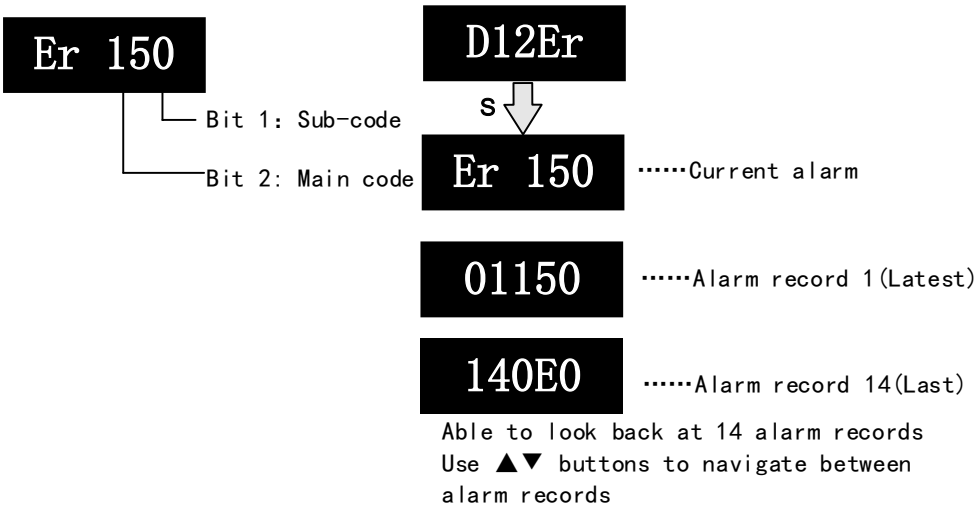

Error code		Content	Attribute		
Main	Sub		Save	Type	Clearable
09	0~F	FPGA communication error	●	2	
0A	0~1	Circuit current detection error	●	2	
	2 , 4	Analog input error	●	2	
	3	Motor power cable not connected	●	1	
	5	DC bus error	●	2	
	6	Temperature measuring error	●	2	
0b	0	Control circuit power supply voltage too low		2	
	1	Control circuit power supply voltage too high		2	●
0c	0	DC bus overvoltage	●	1	●
0d	0	DC bus undervoltage	●	1	●
	1	Single phasing of main power supply	●	2	
	2	No main power supply detected		2	
0E	0	Overcurrent	●	1	
	1	Intelligent Power Module (IPM) overcurrent	●	1	
	2	Power output to motor shorted to ground	●	1	
	4	Phase overcurrent	●	1	
0F	0	Driver overheated	●	2	
10	0	Motor overloaded	●	1	●
	1	Driver overloaded	●	1	●
	2	Motor rotor blocked	●	1	●
11	0	Soft start relay is not energized	●		
	1	Cooling fan damaged	●		
12	0	Regenerative resistor overvoltage	●	2	
	1	Holding brake error	●	1	
	2	Regenerative resistor value too low	●	2	
15	0	Encoder disconnected	●	1	
	1	Encoder communication error	●	1	
	2	Encoder initial position error	●	1	
	3	Multiturn encoder error	●	2	
	4	Encoder parameter settings error	●	2	
	5	Encoder data overflow	●	2	●
	6	Encoder overheated	●	2	●
	7	Encoder counter error	●	2	●
	A	Encoder wire broken (A)	●	1	
	b	Encoder wire broken (B)	●	1	
	C	Encoder wire broken (Z)	●	1	
17	0	Encoder data error	●	1	
	1	Encoder parameter initialization error	●	1	
18	0	Excessive position deviation	●	2	●
	1	Excessive velocity deviation	●	2	●
19	0	Motor vibration too strong	●	2	●
	1	Excessive hybrid position deviation	●	1	●
1A	0	Overspeed	●	2	●
	1	Velocity out of control	●	1	●
1b	0	Bus input signal dithering	●	2	●
	1	Incorrect electronic gear ratio	●	2	●

	3	External encoder frequency divider parameter error	●	1	
	4	Excessive synchronous position command	●	2	●
1c	0	Both STO failed	●	1	
	1	1st STO failed	●	1	
	2	2nd STO failed	●	1	
	3	STO power supply 3.3v anomaly		2	
	4	STO power supply 5.0v anomaly		2	
	5~8	Faulty STO internal optocoupler, inverter		2	
21	0	I/O input interface assignment error	●	2	
	1	I/O input interface function assignment error	●	2	
	2	I/O output interface function assignment error	●	2	
24	0	CRC correction during EEPROM parameter saving		2	
	1	I2C communication status error		2	
	2	Error r/w alarm history record		2	
	3	Error r/w diagnostic data		2	
	4	Error r/w 402 parameters		2	
	5	Error r/w communication parameters		2	
25	0	Gantry deviation error	●	1	
	1	Gantry communication error	●	1	
	2	Gantry slave axis is not enabled	●		●
	3	Gantry synchronous torque deviation is too high	●		●
	4	Gantry synchronization mode is in non-position control mode	●		●
	5	Gantry alignment failed	●		●
26	0	Positive/Negative position limit triggered under non-homing mode	●	2	●
27	0	Analog 1 input overrun limit	●	2	●
	1	Analog 2 input overrun limit	●	2	●
	2	Analog 3 input overrun limit	●	2	●
28	0	Pulse regeneration limit protection	●	2	●
29	0	Control mode does not match under full closed loop mode	●	1	
	1	Encoder mode does not match under full closed loop mode	●	1	
55	0	External ABZ encoder disconnected	●	1	
	1	External ABZ encoder Phase A disconnected	●	1	
	2	External ABZ encoder Phase B disconnected	●	1	
	3	External ABZ encoder Phase Z disconnected	●	1	
57	0	Forced alarm input valid(E-stop)	●	2	●
5F	0	Motor model no. detection error		2	
	1	Driver power module detection error		2	
60	0	Main loop interrupted timeout		2	
	1	Velocity loop interrupted timeout		2	
70	0	Encryption error		2	
89	0	Homing error		2	●
92	0	External encoder parameter initialization error	●	1	

Save: Save error messages to alarm history.
Type: The type 1 and type 2 fault stop mode can be set via Pr5.10 [Sequence at alarm].
Clearable: Clearable alarm by operating the front panel and use auxiliary function **AFACL** as below. Besides clearable alarms, please first solve the error and restart the servo driver to clear alarm.

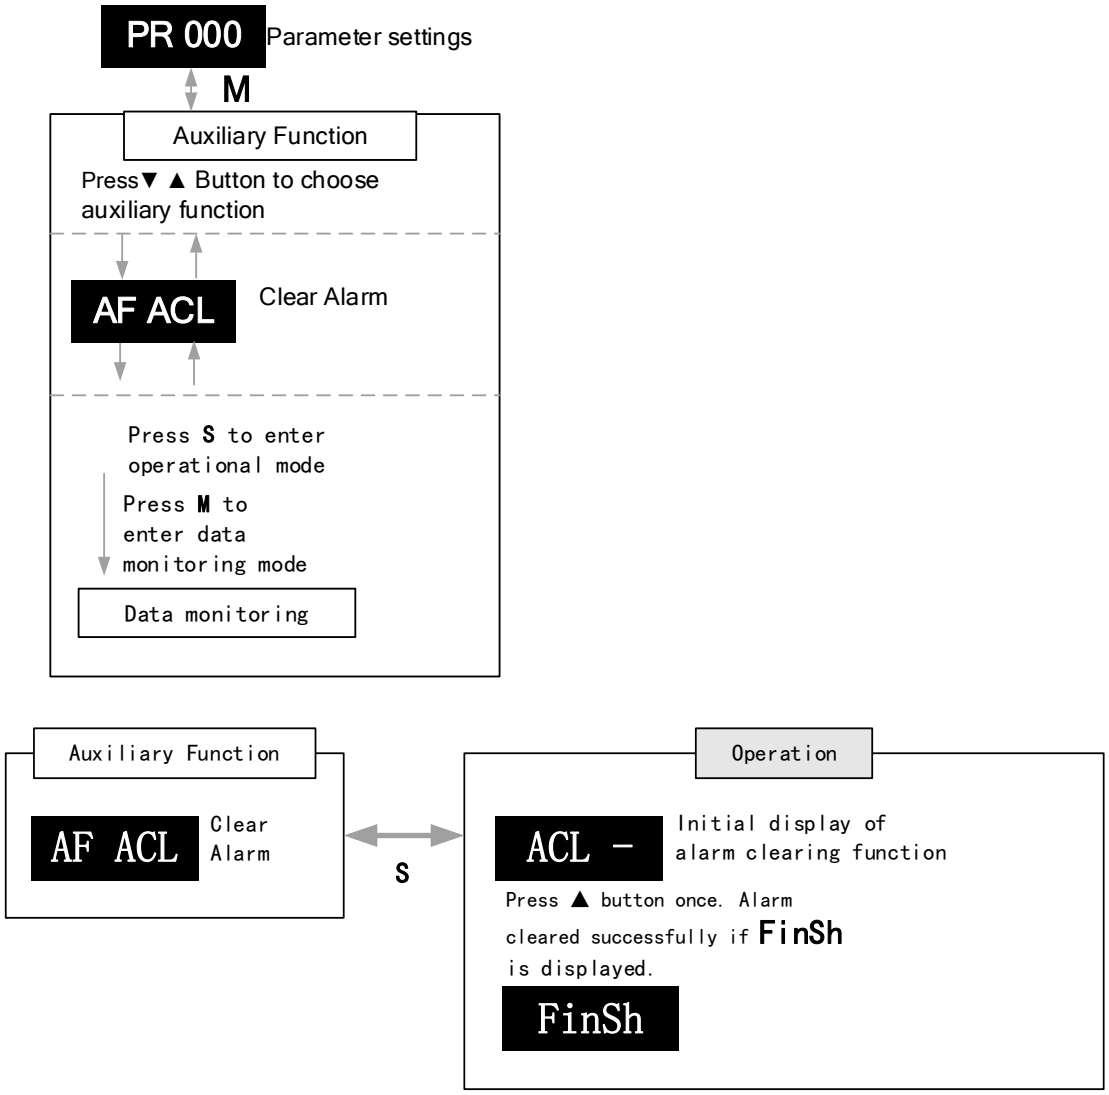

Alarm Handling

***When error occurs, please solve it accordingly. Then, restart. If the solutions described don't work, please consider replacing the driver.*

Error code	Main	Sub	**Display:** "Er 090"--"Er 09F"	
	09	0~F	**Content:** FPGA communication error	
Cause			Diagnosis	Solution
L1, L2 terminal voltage too low			Verify L1, L2 terminal voltage	Make sure L1, L2 terminal voltage is within recommended range

Error code	Main	Sub	**Display:** "Er 0A0"--"Er 0A1"	
	0A	0~1	**Content:** Circuit current detection error	
Cause			Diagnosis	Solution
Motor power cable wiring error			Verify motor power cable wiring	Make sure U,V,W terminal wired properly
Main power supply undervoltage			Verify L1,L2,L3 terminal voltage	Increase main power supply voltage

Error code	Main	Sub	**Display:** "Er 0A2" / "Er 0A4"	
	0A	2 / 4	**Content:** Analog input error	
Cause			Diagnosis	Solution
Analog input wiring error			Verify analog input wiring	Make sure of analog input wiring connection

Error code	Main	Sub	**Display:** "Er 0A3"	
	0A	3	**Content:** Motor power cable not connected	
Cause			Diagnosis	Solution
Motor power cable not connected			Verify motor power cable wiring	Measure **resistance values between U, V, W terminals**, make sure the values are almost equal. If not, might be due to damaged motor or motor winding open circuit.
Motor fault			/	Replace motor

Error code	Main	Sub	**Display:** "Er 0A5"	
	0A	5	**Content:** DC Bus error	
Cause			Diagnosis	Solution
L1, L2 terminal voltage too low			Verify L1, L2 terminal voltage. Check if power on indicator light on servo driver is on and d27 DC bus voltage.	Make sure L1, L2 terminal voltage is within recommended range

Error code	Main	Sub	Display: "Er 0A6"	
	0A	6	**Content:** Temperature measuring error	
Cause			Diagnosis	Solution
L1, L2 terminal voltage too low			Verify L1, L2 terminal voltage	Make sure L1, L2 terminal voltage is within recommended range

Error code	Main	Sub	Display: "Er 0b0"	
	0b	0	**Content:** Control circuit power supply voltage too low	
Cause			Diagnosis	Solution
Control circuit power supply voltage too low			Verify L1C, L2C terminal voltage; check if wiring connection is tight	Increase L1C, L2C terminal voltage; Tighten L1C, L2C terminal connection
Power supply under capacity			/	Increase power supply capacity for L1C, L2C terminals

Error code	Main	Sub	Display: "Er 0b1"	
	0b	1	**Content:** Control circuit power supply abnormal	
Cause			Diagnosis	Solution
USB power supply too low			Verify if USB cable is properly connected and not damaged.	Replace USB Type-C cable

Error code	Main	Sub	Display: "Er 0c0"	
	0c	0	**Content:** DC bus overvoltage	
Cause			Diagnosis	Solution
Main power supply overvoltage			Verify L1,L2,L3 terminal voltage	Decrease main power supply voltage
Acceleration/deceleration time too short			Verify if the time is actually too short	Increase the duration time or change to a regenerative resistor with higher resistance.
Regenerative brake parameter anomaly			Verify P07.32/P07.33	Modify vent overload parameter
Inner brake circuit damaged			/	Replace driver

Error code	Main	Sub	Display: "Er 0d0"	
	0d	0	**Content**: DC bus undervoltage	
Cause			Diagnosis	Solution
Main power supply undervoltage			Verify L1,L2,L3 terminal voltage	Increase main power supply voltage
L1C, L2C connected when USB cable is connected			Control circuit power on before driver initialization. Alarm might occur.	Please disconnect the USB cable before powering on control circuit.

Error code	Main	Sub	Display: "Er 0d1"
	0d	1	**Content**: Single phasing of main power supply

Cause	Diagnosis	Solution
Main power supply undervoltage	Verify L1,L2,L3 terminal voltage	Increase main power supply voltage
Main power supply wiring error	Loose connection of L1, L2, L3	Secure connections

Error code	Main	Sub	**Display:** "Er 0d2"
	0d	2	**Content**: No main power supply detected
Cause			Diagnosis	Solution
No main power supply			Verify L1,L2,L3 terminal voltage	1. Increase main power supply voltage 2. Secure connections

Error code	Main	Sub	**Display:** "Er 0E0"
	0E	0	**Content:** Overcurrent
Cause			Diagnosis	Solution
Driver power output short circuit			Verify if there is short circuit between UVW terminals, or shorted to PG.	1. Make sure there is no circuit. 2. Make sure motor is not damaged
Motor wiring error			Verify motor wiring	Reconnect motor wiring
IGBT module short circuit			Disconnect motor output cable. Then, enable servo driver to check for overcurrent	Replace driver
Control parameter anomaly			Verify if parameter exceeds recommended range	Set parameter within recommended range.
Control command anomaly			Verify if command motion is too acute	Modify control command; use filter

Error code	Main	Sub	**Display:** "Er 0E1"	
	0E	1	**Content**: Intelligent Power Module (IPM) overcurrent	
Cause			Diagnosis	Solution
Driver power output short circuit			Verify if there is short circuit between UVW terminals, or shorted to PG.	1. Make sure there is no circuit. 2. Make sure motor is not damaged
Motor wiring error			Verify motor wiring	Reconnect motor wiring
IGBT module short circuit			Disconnect motor output cable. Then, enable servo driver to check for overcurrent	Replace driver
IGBT module undervoltage			/	Replace driver
Control parameter anomaly			Verify if parameter exceeds recommended range	Set parameter within recommended range.
Control command anomaly			Verify if command motion is too acute	Modify control command; use filter
Error code	Main	Sub	**Display:** "Er 0E2"	
	0E	2	**Content**: Power output to motor shorted to ground	
Cause			Diagnosis	Solution
Driver U, V, W terminals shorted to ground			Disconnect motor power cable and check for short circuit between driver UVW and PE	1. Reconnect wiring. 2. Change motor power cable.
Motor shorted to ground			Connect motor power cable to driver power output. Verify if resistance value of UVW to PE is in the range of MegaOhm (MΩ)	Replace motor
Error code	Main	Sub	**Display:** "Er 0E4"	
	0E	2	**Content**: Phase overcurrent	
Cause			Diagnosis	Solution
Driver U, V, W terminals shorted to ground			Disconnect motor power cable and check for short circuit between driver UVW and PE	1. Reconnect wiring. 2. Change motor power cable.
Motor shorted to ground			Connect motor power cable to driver power output. Verify if resistance value of UVW to PE is equal and if there is short circuit	Replace motor

Error code	Main	Sub	**Display:** "Er 0F0"	
	0F	0	**Content**: Driver overheated	
Cause			Diagnosis	Solution
Temperature of power module exceeded upper limit			Measure the temperature of driver radiator.	1. Improve cooling condition. Please check installation guide; 2. Replace driver and motor with higher power rating; 3. Increase duration time for acceleration and deceleration; 4. Decrease load

Error code	Main	Sub	Display: "Er 100"
	10	0	Content: Motor overloaded

Cause	Diagnosis	Solution
Load too heavy	Verify if actual load exceeds maximum value allowed	1. Decrease load 2. Adjust limit values
Strong mechanical vibration	Look for mechanical vibration from machine system	1. Adjust gain value of control loop 2. Increase duration time for acceleration and deceleration
Motor or encoder cable wiring error	Verify motor and encoder wiring	1. Reconnect wiring 2. Replace motor and encoder cable
Holding brake engaged	Verify holding brake terminal voltage	Cut off holding brake

Error code	Main	Sub	Display: "Er 101"
	10	1	Content: Driver overloaded

Cause	Diagnosis	Solution
Motor power cable wiring error	UVW terminals wiring error	Make sure motor power cable wiring connection is correct
Motor not matched	Motor current is too high	Motor rated current is higher than driver rated current. Please change to a driver with higher rated current.

Error code	Main	Sub	Display: "Er 102"
	10	2	Content: Motor rotor blocked

Cause	Diagnosis	Solution
Motor rotor blocked	Look for mechanical blockages	Check the machinery
Motor rotor blocking time threshold value too low	Verify value of Pr6.57	Adjust value of Pr6.57

Error code	Main	Sub	Display: "Er 120"
	12	0	Content: Regenerative resistor overvoltage

Cause	Diagnosis	Solution
Regenerative energy exceeded capacity of regenerative resistor	1. Verify if velocity is too high 2. Verify if load is too large	1. Decrease motor rotational velocity; 2. Decrease load inertia; 3. Add an external regenerative resistor;
Power supply voltage too high	1. Verify if power supply voltage is within the rated range. 2. Interval regenerative resistor value is too low	1. Decrease power supply voltage 2. Increase regeneration resistance value(add external regenerative resistor)
Unstable power supply voltage	Verify if power supply voltage is stable	Add a surge suppressor to main power supply.
Regenerative energy discharge circuit damaged	/	1. Add an external regenerative resistor; 2. Replace driver

Error code	Main	Sub	Display: "Er 121"	
	12	1	Content: Holding brake error	
Cause			Diagnosis	Solution
Holding brake circuit damaged			Regenerative resistor disconnected	Replace regenerative resistor
			Holding brake IGBT damaged	Replace driver

Error code	Main	Sub	Display: "Er 122"	
	12	2	Content: Regenerative resistor value too low	
Cause			Diagnosis	Solution
External regenerative resistor value is less than the minimum value allowed by the drive			/	Replace the regenerative resistor with the right resistance value which meets the specification of the driver

Error code	Main	Sub	Display: "Er 150"	
	15	0	Content: Encoder disconnected	
Cause			Diagnosis	Solution
Encoder cable disconnected			Verify encoder cable connection	Make sure encoder cable properly connected
Encoder cable wiring error			Verify if encoder wiring is correct	Reconnect encoder wiring
Encoder damaged			/	Replace motor
Encoder measuring circuit damaged			/	Replace driver

Error code	Main	Sub	Display: "Er 151"	
	15	1	Content: Encoder communication error	
Cause			Diagnosis	Solution
Encoder wire shielding layer is missing			Verify if encoder cable has shielding layer	Replace with standard encoder cable
Encoder cable wiring error			Verify if encoder wiring is correct	Reconnect encoder wiring
Encoder damaged			/	Replace motor

Error code	Main	Sub	Display: "Er 152"	
	15	2	Content: Encoder initial position error	
Cause			Diagnosis	Solution
Communication data abnormal			1. Verify if encoder power supply voltage is DC5V ± 5% ; 2. Verify if encoder cable and shielded layer is not damaged; 3. Verify if encoder cable is close to high-powered power supply cable	1. Make sure encoder power supply voltage is stable 2. Make sure encoder cable is not damaged. 3. Make sure encoder cable shielded layer is grounded to frame 4. Make sure encoder cable is away from high-powered power supply cable
Encoder damaged			/	Replace motor
Encoder measuring circuit damaged			/	Replace driver

Error code	Main	Sub	Display: "Er 153"	
	15	3	**Content:** Multiturn encoder error	
Cause			Diagnosis	Solution
Initial use			Origin calibration not performed	Perform origin positioning and multiturn position initialization, calibrate the origin of coordinate system.
Encoder without multiturn absolute function used			Verify if encoder has multiturn absolute function	1. Replace the motor with a multiturn absolute encoder. 2. Set Pr0.15 = 0 to deactivate multiturn absolute function.
Low battery power			Replace battery and restart driver to clear alarm	Replace battery
Battery has no power or has been dismantled			Alarm not cleared after replacing battery and restart	Absolute position lost. Return to origin and perform multiturn initialization, calibrate the origin of coordinate system

Error code	Main	Sub	Display: "Er 154"	
	15	4	**Content:** Encoder parameter settings error	
Cause			Diagnosis	Solution
Absolute encoder mode is incorrectly set.			Verify if encoder has multi-turn absolute value function.	Modify absolute encoder mode settings

Error code	Main	Sub	Display: "Er 155"	
	15	5	**Content:** Encoder data overflow	
Cause			Diagnosis	Solution
Encoder data overflow			Verify if encoder is not damaged	Initialize multiturn data
Absolute value applications, motor rotates in one direction			Verify if encoder is not damaged	Adjust absolute value application mode, set to turntable mode

Error code	Main	Sub	Display: "Er 156"	
	15	6	**Content:** Encoder overheated	
Cause			Diagnosis	Solution
The encoder temperature is too high.			Verify if motor temperature is too high	Reduce encoder temperature.

Error code	Main	Sub	Display: "Er 157"	
	15	7	**Content:** Encoder counter error	
Cause			Diagnosis	Solution
Encoder data overflow			Verify if encoder is not damaged	Initialize multiturn data
Absolute value applications, motor rotates in one direction			Verify if encoder is not damaged	Adjust absolute value application mode, set to turntable mode

Error code	Main	Sub	Display: "Er 15A"	
	15	A	Content: Encoder wire broken (A)	
Cause			Diagnosis	Solution
External encoder A phase wire break			Check external encoder wiring	Ensure that the encoder A phase wiring is correct and there is no disconnection or short wire.

Error code	Main	Sub	Display: "Er 15b"	
	15	b	Content: Encoder wire broken (B)	
Cause			Diagnosis	Solution
External encoder B phase wire break			Check external encoder wiring	Ensure that the encoder B phase wiring is correct and there is no disconnection or short wire.

Error code	Main	Sub	Display: "Er 15c"	
	15	7	Content: Encoder wire broken (Z)	
Cause			Diagnosis	Solution
External encoder Z phase wire break			Check external encoder wiring	Ensure that the encoder Z phase wiring is correct and there is no disconnection or short wire.

Error code	Main	Sub	Display: "Er 170"	
	17	0	Content: Encoder data error	
Cause			Diagnosis	Solution
Communication data abnormal			1. Verify if encoder power supply voltage is DC5V ± 5% ; 2. Verify if encoder cable and shielded layer is not damaged; 3. Verify if encoder cable is close to high-powered power supply cable	1. Make sure encoder power supply voltage is stable 2. Make sure encoder cable is not damaged. 3. Make sure encoder cable shielded layer is grounded to frame 4. Make sure encoder cable is away from high-powered power supply cable
Encoder damaged			/	Replace motor
Encoder measuring circuit damaged			/	Replace driver

Error code	Main	Sub	Display: "Er 171"	
	17	1	Content: Encoder parameter initialization error	
Cause			Diagnosis	Solution
Driver and motor not matched			Verify driver and motor models.	Replace with matching driver and motor
Error while getting parameters from encoder			1. Verify if encoder cable is standard. 2. Verify if encoder has no peeled insulator, broken connection or improper contact.	Use standard encoder cable, verify the connection of both sides of driver and motor, change encoder cable if necessary

Error code	Main	Sub	Display: "Er 180"
	18	0	Content: Excessive position deviation

Cause	Diagnosis	Solution
Improper position deviation settings	Verify if value of Pr_014 is too low	Increase value of Pr_014
Position gain setting too low	Verify if values of Pr1.00 & Pr1.05 are too low	Increase values of Pr1.00 & Pr1.05
Torque limit too low	Verify if values of Pr0.13 & Pr5.22 are too low	Increase values of Pr0.13 & Pr5.22
Excessive external load	1. Verify if acceleration and deceleration duration time is too low. 2. Verify if rotational velocity is too high 3. Verify if load is too large	1. Increase duration time for acceleration and deceleration 2. Decrease rotational velocity 3. Decrease load

Error code	Main	Sub	Display: "Er 181"
	18	1	Content: Excessive velocity deviation

Cause	Diagnosis	Solution
Deviation between set velocity and actual velocity is too great	Verify if value of Pr6.02 is too low	1. Increase value of Pr6.02; 2. Set Pr6.02 to 0, position error detection off.
Acceleration and deceleration duration time for set velocity is too low	Verify if value of Pr3.12 and Pr3.13 are too low	1. Increase value of Pr3.12, Pr3.13; 2. Adjust velocity gain to reduce velocity lag error

Error code	Main	Sub	Display: "Er 190"
	19	0	Content: Vibration too strong

Cause	Diagnosis	Solution
Resonance	Mechanical stiffness is too high, resonance occurs	Reduce mechanical stiffness or use filter
Current loop gain too large	Verify current loop gain value	Reduce current loop gain

Error code	Main	Sub	Display: "Er 191"
	19	1	**Content:** Excessive hybrid position deviation

Cause	Diagnosis	Solution
Driver UVW terminal output single phasing or wiring error	Verify if UVW terminal wiring connection is right	Make sure UVW terminals are correctly connected to UVW of motor; change motor power cable.
Motor rotor blocked	Look for mechanical blockages	Check the machinery
Driver stiffness too low	Verify if position loop and velocity loop gain is too low	Increase position loop and velocity loop gain
Full closed loop position deviation (**Deviation between external encoder feedback position and motor feedback position**) exceeds Pr0.33	Verify if Pr0.33 is set too low	Increase Pr0.33 set value accordingly but please be aware that doing so might cause the position deviation to be higher.

Error code	Main	Sub	Display: "Er 1A0"
	1A	0	**Content:** Overspeed

Cause	Diagnosis	Solution
Motor velocity exceeded first speed limit (Pr3.21)	1. Verify if velocity command is too high; 2. Verify if simulated velocity command voltage is too high; 3. Verify if parameter value of Pr3.21 is too low; 4. Verify if input frequency and division frequency coefficient of pulse train is proper; 5. Verify if encoder is wired correctly	1. Adjust velocity input command; 2. Increase Pr3.21 value; 3. Adjust pulse train input frequency and division frequency coefficient; 4. Verify encoder wiring;

Error code	Main	Sub	Display: "Er 1A1"
	1A	1	**Content:** Velocity out of control

Cause	Diagnosis	Solution
Motor velocity out of control, Excessive velocity error	Verify encoder phase sequence; Verify if UVW cable is connected to the right terminal	Reconnect UVW if wrongly connected. If still remains unsolved, please contact technical support.

Error code	Main	Sub	Display: "Er 1b0"
	1b	0	**Content:** Bus input signal dithering

Cause	Diagnosis	Solution
Controller synchronization dithering	/	Increase alarm threshold value

	Main	Sub	Display: "Er 1b1"

Error code	1b	1	**Content:** Incorrect electronic gear ratio	
Cause			Diagnosis	Solution
Values out of range			Numerator or denominator is zero/Set values out of range	Reduce number of pulses per revolution

Error code	Main	Sub	**Display:** "Er 1b3"	
	1b	3	**Content:** External encoder frequency divider parameter error	
Cause			Diagnosis	Solution
Values out of range			Numerator or denominator is zero/Set values out of range	Reduce number of pulses per revolution

Error code	Main	Sub	**Display:** "Er 1b4"	
	1b	4	**Content:** Excessive synchronous position mode command	
Cause			Diagnosis	Solution
Values out of range			Numerator or denominator is zero/Set values out of range	Reduce number of pulses per revolution

Error code	Main	Sub	**Display:** "Er 1c0"	
	1c	0	**Content:** Both STO failed	
Cause			Diagnosis	Solution
Both STO input signals valid			Verify if STO power supply is normal	Verify 24V STO power supply and power cable connection
			Disconnect switch connected to STO	Close switch

Error code	Main	Sub	**Display:** "Er 1c1"	
	1c	1	**Content:** 1st STO failed	
Cause			Diagnosis	Solution
1st STO input signal valid			Verify if STO power supply is normal	Verify 24V STO power supply and power cable connection
			Disconnect switch connected to STO	Close switch

Error code	Main	Sub	**Display:** "Er 1c2"	
	1c	2	**Content:** 2nd STO failed	
Cause			Diagnosis	Solution
2nd STO input signal valid			Verify if STO power supply is normal	Verify 24V STO power supply and power cable connection
			Disconnect switch connected to STO	Close switch

	Main	Sub	**Display:** "Er 210"

Error	21	0	**Content:** I/O input interface assignment error	
Cause			Diagnosis	Solution
Input signal assigned with two or more functions.			Verify values of Pr4.00-Pr4.09, Pr4.44-4.47	Set proper values for Pr4.00-Pr4.09, Pr4.44-4.47

Error code	Main	Sub	**Display:** "Er 211"	
	21	1	**Content:** I/O input interface function assignment error	
Cause			Diagnosis	Solution
Input signal assignment error			Verify values of Pr4.00-Pr4.09, Pr4.44-4.47	Set proper values for Pr4.00-Pr4.09, Pr4.44-4.47

Error code	Main	Sub	**Display:** "Er 212"	
	21	2	**Content:** I/O output interface function assignment error	
Cause			Diagnosis	Solution
Input signal assigned with two or more functions.			Verify values of Pr4.10-Pr4.15	Set proper values for Pr4.10-Pr4.15
Input signal not assigned			Verify values of Pr4.10-Pr4.15	Set proper values for Pr4.10-Pr4.15

Error code	Main	Sub	**Display:** "Er 240"	
	24	0	**Content:** CRC correction error during EEPROM parameter saving	
Cause			Diagnosis	Solution
L1, L2 terminal voltage too low			Verify if L1, L2 terminal voltage too low	Make sure L1, L2 terminal voltage is within recommended range
Parameter saving anomaly			Save parameter again and restart	Save parameter again

Error code	Main	Sub	**Display:** "Er 250"	
	25	0	**Content:** Gantry communication error	
Cause			Diagnosis	Solution
Excessive Gantry drivers deviation			Verify if both drivers share the same set of parameters	Unify the parameters of both drivers
			Verify if control cable of the drivers are properly connected	Connect control cable properly
			Verify if gantry communication cable is connected properly	Connect communication cable properly

Error code	Main	Sub	**Display:** "Er 251"	
	25	1	**Content:** Gantry communication error	
Cause			Diagnosis	Solution
Gantry communication data error			Verify if gantry communication cable is connected properly	Connect communication cable properly

	Main	Sub	**Display:** "Er 260"

Error code	26	0	**Content:** Positive/Negative position limit triggered under non-homing mode	
Cause			Diagnosis	Solution
Positive/negative position limit triggered			Verify position limit signal	/

Error code	Main	Sub	**Display:** "Er 270" -- "Er 272"	
	27	0~2	**Error description:** Analog input 1-3 out of range	
Cause			Diagnosis	Solution
Analog value out of range			Verify if analog input value is out of range	Adjust analog input voltage

Error code	Main	Sub	**Display:** "Er 280"	
	28	0	**Error description:** Pulse regeneration limit protection	
Cause			Diagnosis	Solution
The frequency of the divided pulse output exceeds the upper limit of the frequency allowed by the driver's hardware (2MHz)			Calculate the output pulse frequency corresponding to the motor speed when a fault occurs. At this time, whether the motor speed and the divided output pulse frequency are too high. Output pulse frequency (Hz) = motor speed (rpm) / (60 × P00.11).	Reduce the number of encoder frequency division output pulses of P00.11 or reduce the speed. During the entire motion process, the output pulse frequency must be less than the upper frequency limit allowed by the hardware.

Error code	Main	Sub	**Display:** "Er 290"	
	29	0	**Error description:** Control mode does not match in full closed loop mode	
Cause			Diagnosis	Solution
Control mode is not positioning mode when full closed loop mode is on			Verify if Pr0.01 is set to 0	Make sure Pr0.01 is set to 0 – Position mode

Error code	Main	Sub	**Display:** "Er 291"	
	29	1	**Error description:** Encoder mode does not match in full closed loop mode	
Cause			Diagnosis	Solution
Encoder mode does not match in full closed loop mode			Only ABZ encoder is supported for the moment being	For external ABZ encoder, please set Pr0.31 = 0.

Error code	Main	Sub	**Display:** "Er 550" -- "Er 553"	
	55	0~3	**Error description:** Encoder mode does not match in full closed loop mode	
Cause			Diagnosis	Solution
Er550: External ABZ encoder disconnected			Verify if encoder cable is connected properly	1. Make sure encoder cable connection is tight 2. Change encoder cable 3. External encoder cable needs to be shielded
Er551: External encoder Phase A disconnected				
Er552: External encoder Phase B disconnected				
Er553: External encoder Phase Z disconnected				

Error code	Main	Sub	**Display:** " Er 570"	
	57	0	**Error description:** Forced alarm input valid	
Cause			Diagnosis	Solution
Forced alarm input signal occurred			Verify forced alarm input signal	Verify if the input wiring connection is correct

Error code	Main	Sub	**Display:** "Er 5F0"	
	5F	0	**Content:** Motor model no. detection error	
Cause			Diagnosis	Solution
Automatically detected motor doesn't match set motor			/	Please contact our technical support

Error code	Main	Sub	**Display:** "Er 5F1"	
	5F	1	**Error description:** Driver power module detection error	
Cause			Diagnosis	Solution
Driver power rating is not within range.			Restart driver	Please contact our technical support

Error code	Main	Sub	**Display:** "Er 600"	
	60	0	**Error description:** Main loop interrupted timeout	
Cause			Diagnosis	Solution
The motor control loop calculation time overflow			Check for interference from devices releasing electromagnetic field	Ground driver and motor to reduce interference
			Restart driver	Replace driver
Error code	Main	Sub	**Display:** "Er 601"	
	60	1	**Error description:** Velocity loop interrupted timeout	
Cause			Diagnosis	Solution
Motor control loop calculation time overflow			Verify if encoder connection is and that the encoder cable is not too long (more than 20 meters)	Replace encoder cable if necessary
			Restart driver	Replace the drive with a new one

Error code	Main Extr	Sub	**Display:** "Er 700"
	70	0	**Error description:** Encryption error
Cause			Diagnosis	Solution
Encryption error during initialization upon power-on.			Restart driver	Please contact our technical support

Error code	Main	Sub	**Display:** "Er 890"
	89	0	**Error description:** Homing error
Cause			Diagnosis	Solution
1. Excess homing velocity 2. Homing mode is different from given signal 3. Sensor signal edge inconsistent			1. Verify if homing velocity is too high 2. Verify if homing mode is set correctly 3. Verify if sensor signal edge is consistent	1. Set an optimal homing velocity 2. Make sure sensor signal edge is consistent.
Inconsistent origin status			1. Homing acceleration/ deceleration is set too low 2. Electronic gear ratio is low which causes acceleration/ deceleration to be too low	1. If electronic gear ratio cannot be changed, please set a suitable 609A. 2. Increase electronic gear ratio

Error code	Main	Sub	**Display:** "Er 920"
	92	0	**Error description:** External encoder parameter initialization error
Cause			Diagnosis	Solution
Encoder parameter Pr0.37 setting error			Verify if Pr0.37 set value is out of range	Modify Pr0.37 set value, please use default value and see if the error still persists.

Alarm Clearing

For alarm can be cleared, there are 3 methods.

Method 1:

1、By setting bit 7 of 6040h to 1, switches state machine from fault to initialization completion, No fault (Servo on disabled).

Method 2:

Use auxiliary function "AF_ACL"

1、Press M to select auxiliary function, Press SET to enter into "AF_ACL", Press and hold to clear the alarm


Method 3:

Set IO input function as Alarm clear input "(A-CLR)", refer to switch input interface connection to clear the alarm.

Appendix III - Timing Chart

Servo Enabled

Power on sequence diagram

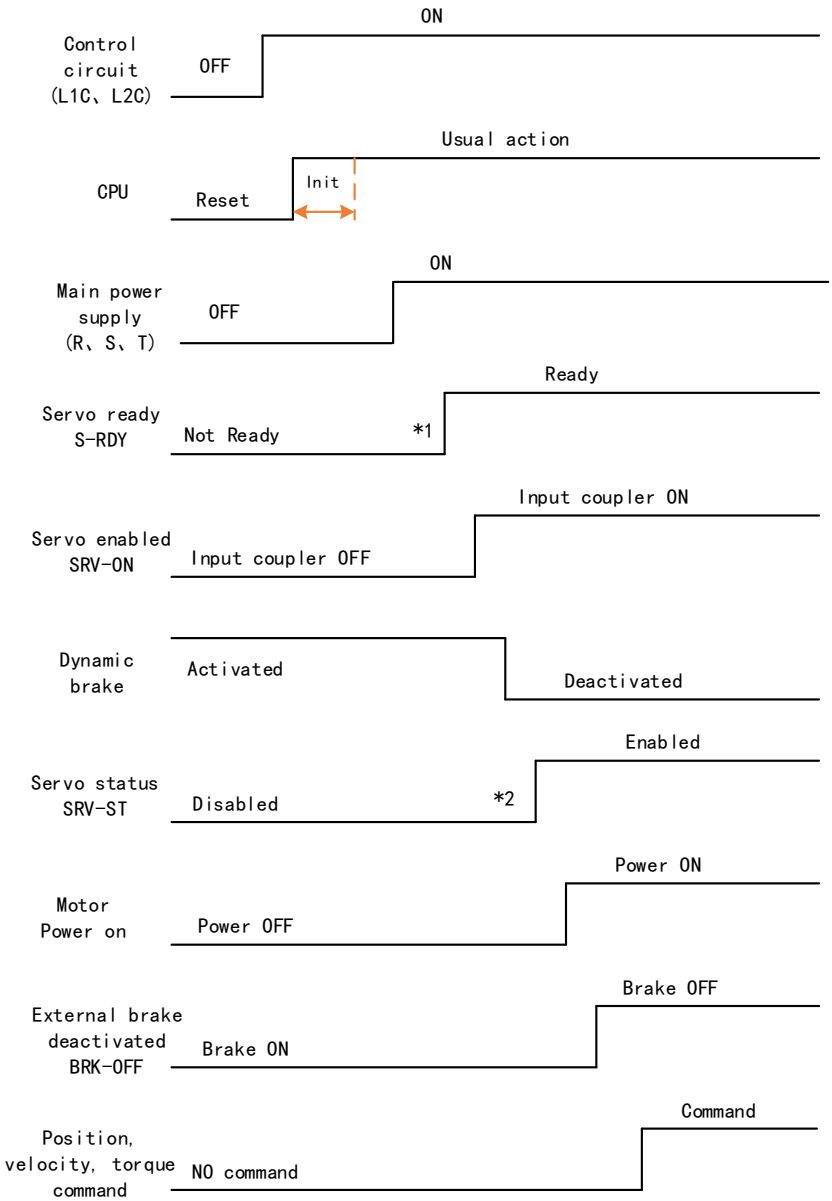

Please enter servo status, position, velocity, torque command as sequence diagram above.
*1. S-RDY signal is given after CPU initialization and main power supply powered on.
* 2. SRV-ST signal is received when servo driver is enabled. Command input is not allowed yet.

Servo Stop


Servo stopping are of 3 different methods: Servo braking method, free stopping method, dynamic braking method.

Stopping method	Description	Details
Servo braking	Servo driver delivers braking torque in opposite direction	Quick stopping but mechanical impact might exist
Free stopping	Motor power cut off. Free to move until velocity = 0. Affected inertia, friction and other factors	Smooth deceleration, low mechanical impact but slow stopping
Dynamic braking	Brake activated when in motion	Quick stopping but mechanical impact might exist


Stopping status	Status after stopped
Free running	Motor is powered off, rotor is free to rotate
Dynamic braking	Motor is powered off, rotor is not free to rotate
Holding brake stopping	Motor axis is locked, cannot rotate freely

Motor stopping（Servo disabled）- Sequence Diagram


- Servo braking method. Status after stopping: Dynamic braking (P05.06 = 1)

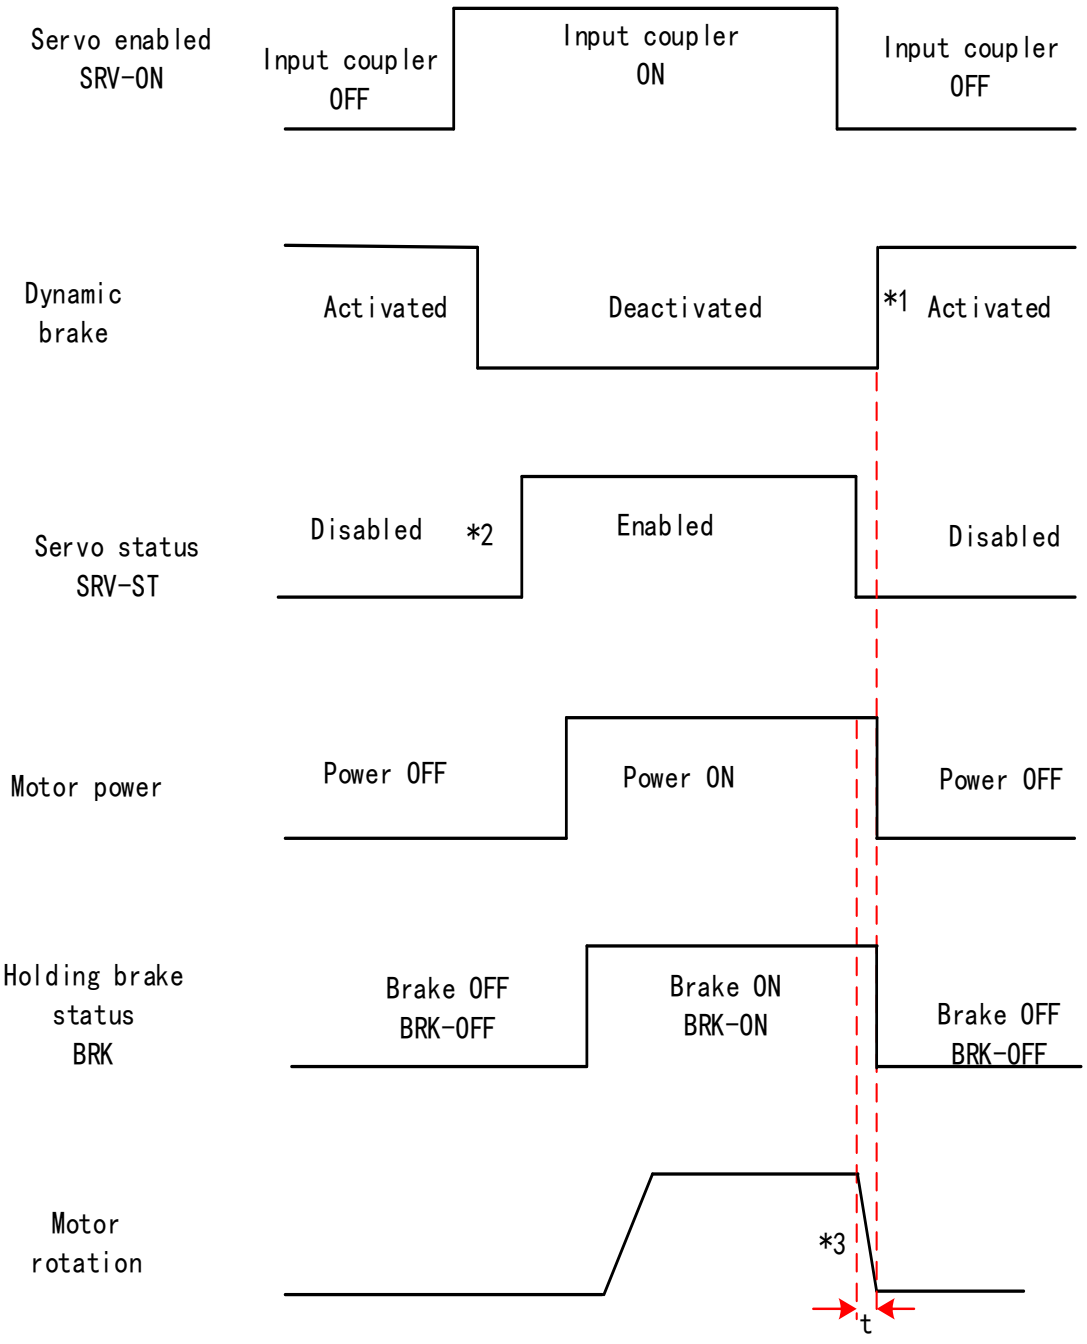


Free stopping method. Status after stopping: Dynamic braking (P05.06 = 1)

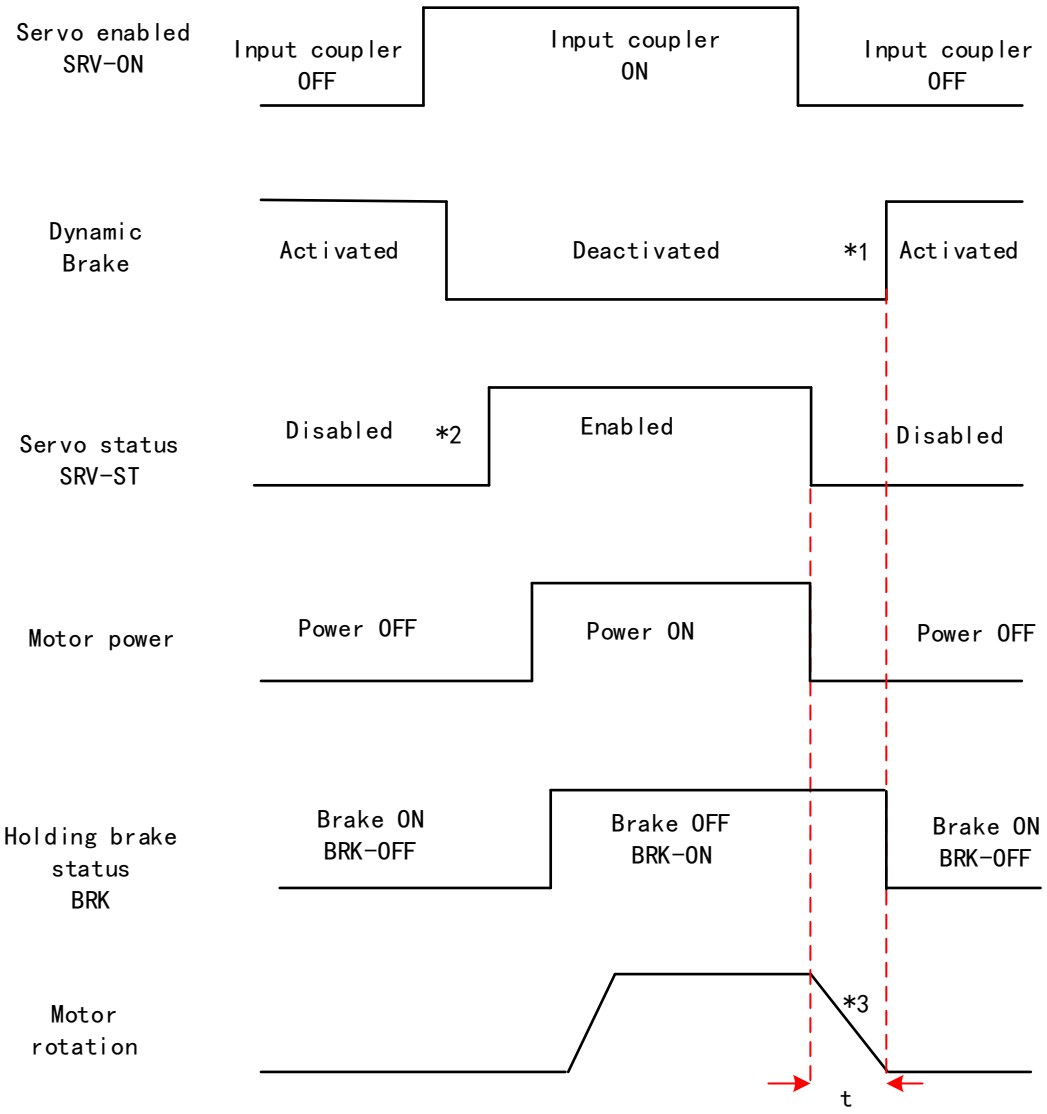
Servo enabled
SRV-ON
Input coupler
OFF
Input coupler
ON
Input coupler
OFF
Dynamic
Brake
Activated
Deactivated
*1
Activated
Servo status
SRV-ST
Disabled
*2
Enabled
Disabled
Motor power
Power OFF
Power ON
Power OFF
Holding brake
status
BRK
Brake ON
BRK-OFF
Brake OFF
BRK-ON
Brake ON
BRK-OFF
Motor
rotation
*3
t


- Dynamic braking method. Status after stopping: Dynamic braking (P05.06 = 2)

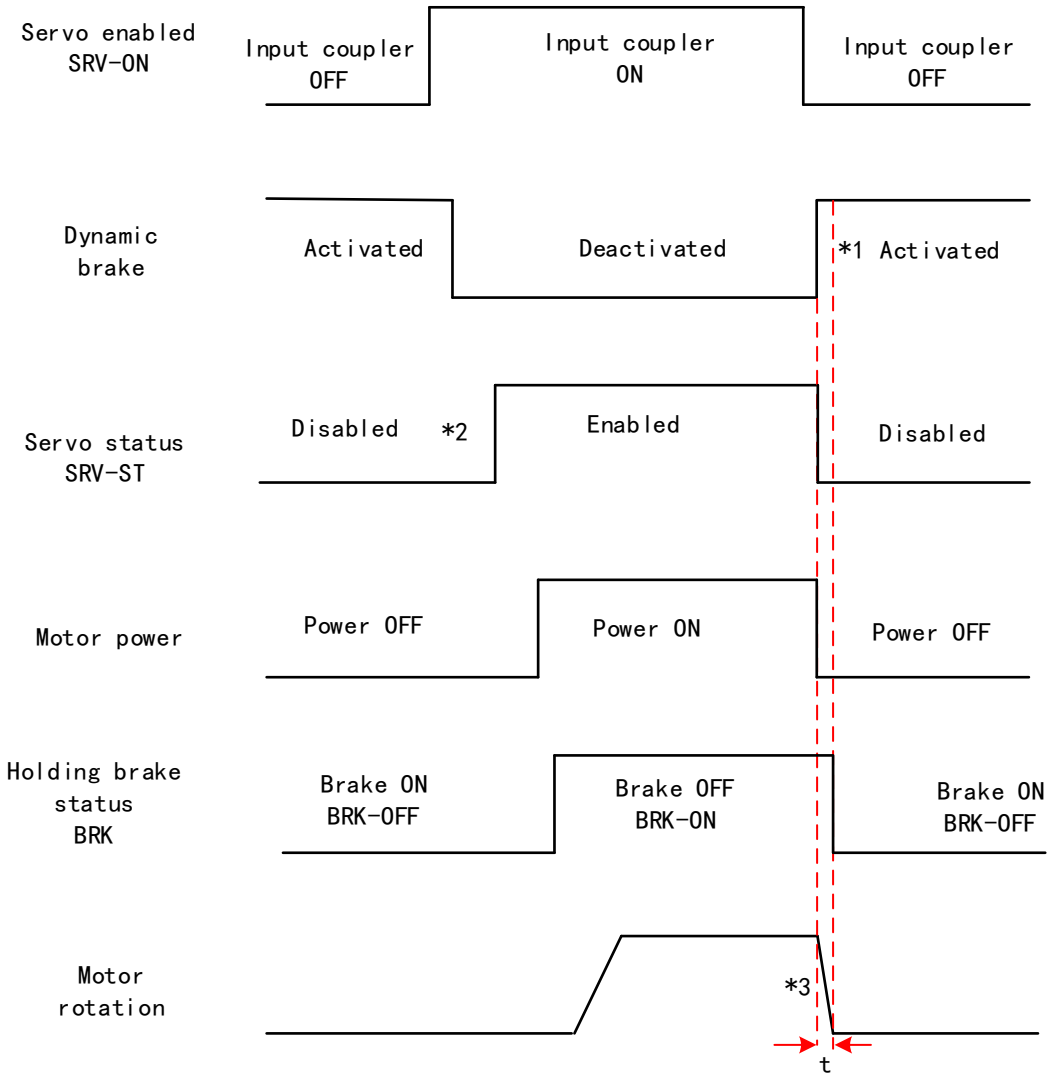


- Servo stopping method. Status after stopping: Free running (P05.06 = 3)

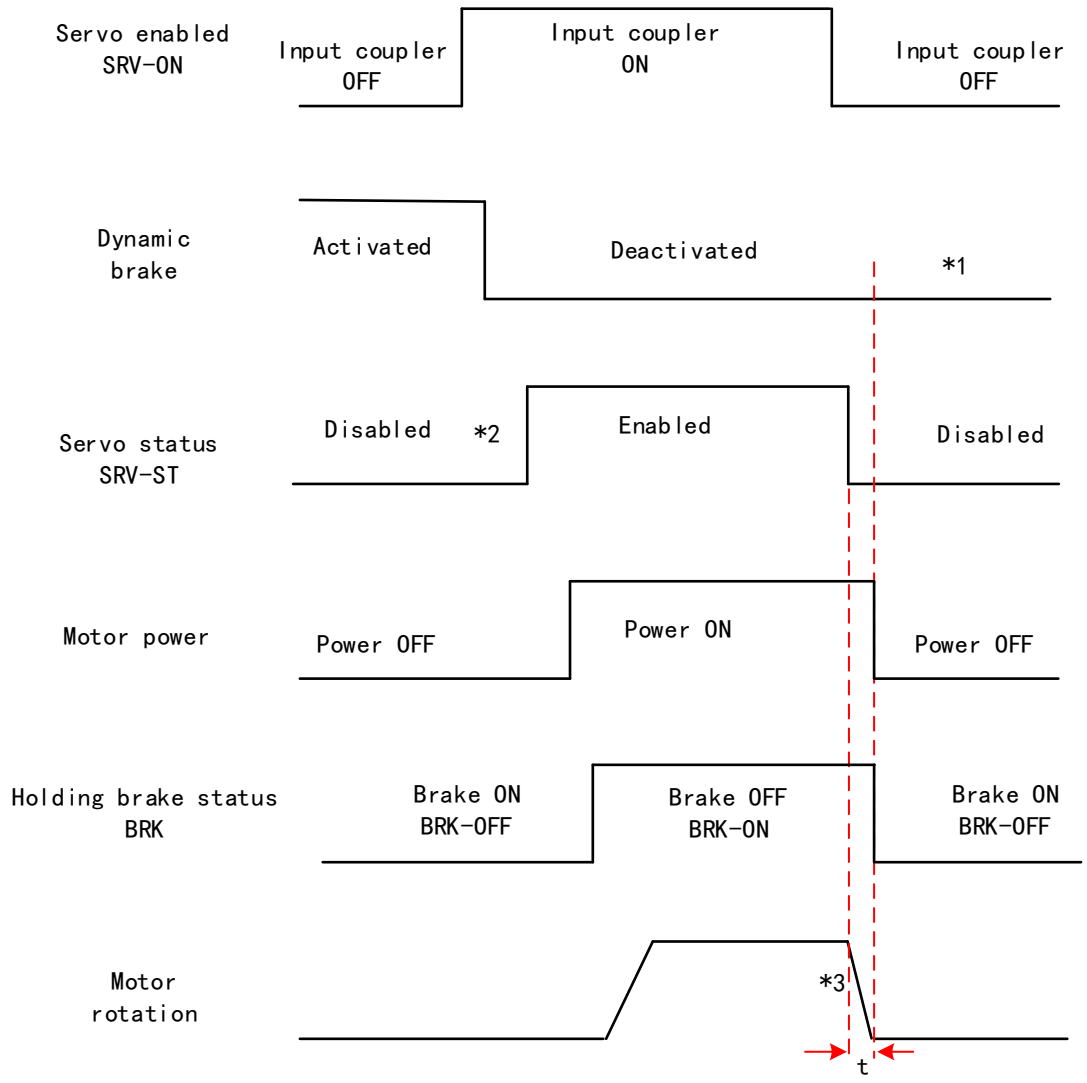

- Free stopping method. Status after stopping: Free running (P05.06 = 4)

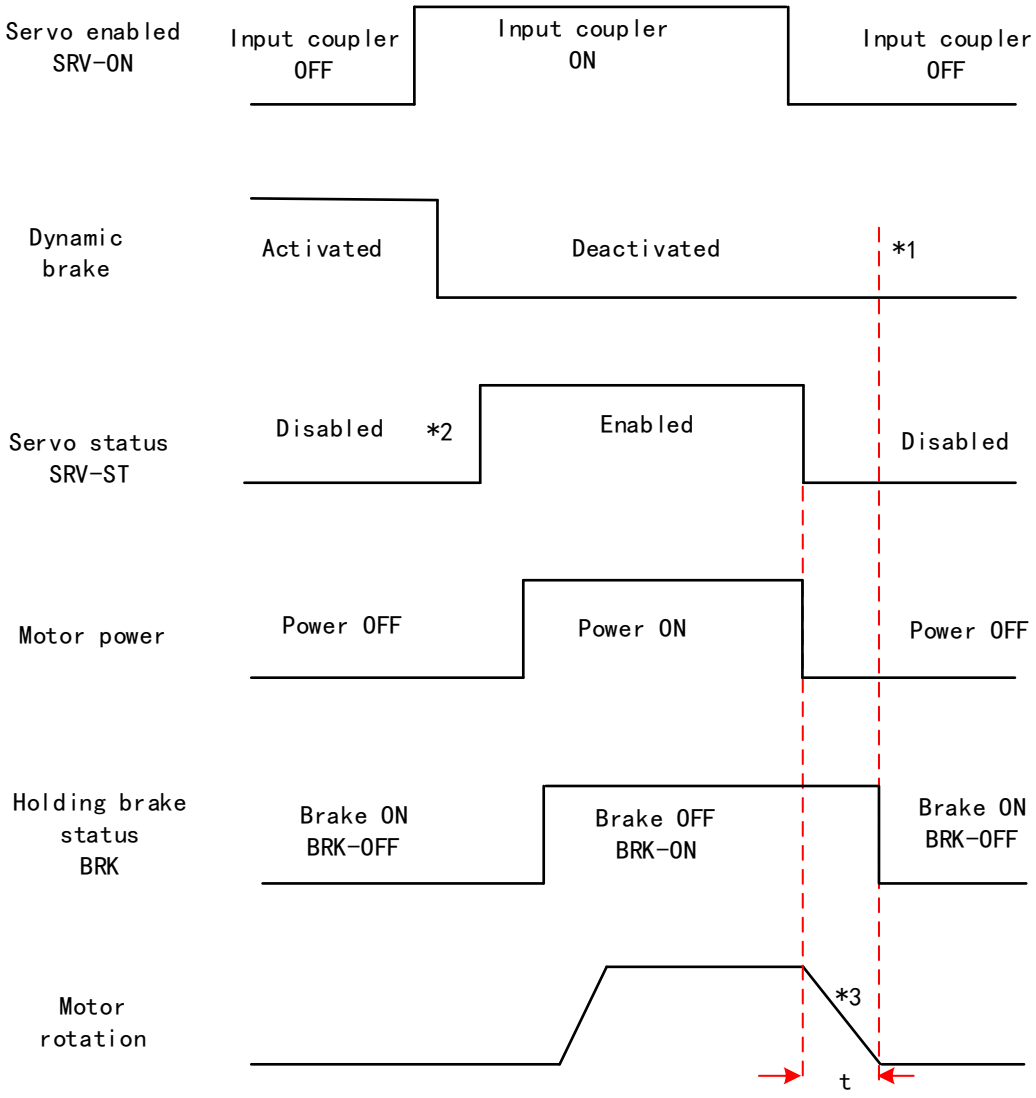

- Dynamic braking method. Status after stopping: Free running (P05.06 = 5)

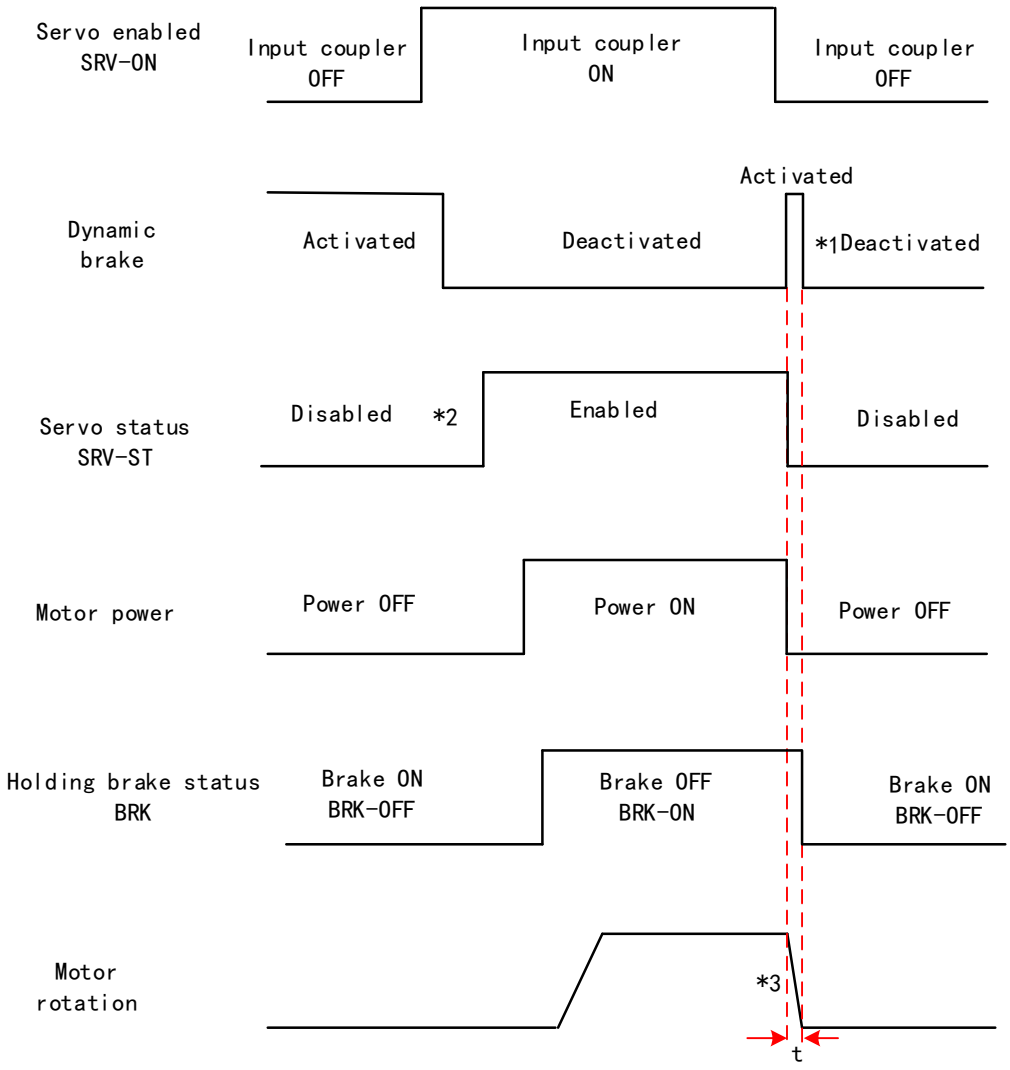

*1. Status after stopping is as defined in P05.06.


*2. SRV-ST signal is received when servo driver is enabled. Command input is not allowed yet.

*3. Servo stopping method is as defined in P05.06; braking torque in opposite direction to decelerate the motor is as defined in P05.11. Deceleration time t is determined by whichever comes first between time set in P06.14 and time needed for motor to drop below velocity set in P04.39. After deceleration time t, dynamic braking will be off and holding brake signal will be set to OFF (Holding brake is activated. Although BRK-OFF signal is valid, actual activation of holding brake is dependent on whether the motor comes with holding brake).


4. BRK-ON signal doesn't indicate the activation of holding brake but the validation of the signal. Holding brake is not applied when BRK-ON signal is valid. Same idea goes for BRK-OFF signal.

Stopping when alarm occurs – Sequence Diagram


- Servo braking method. Status after stopping: Dynamic braking

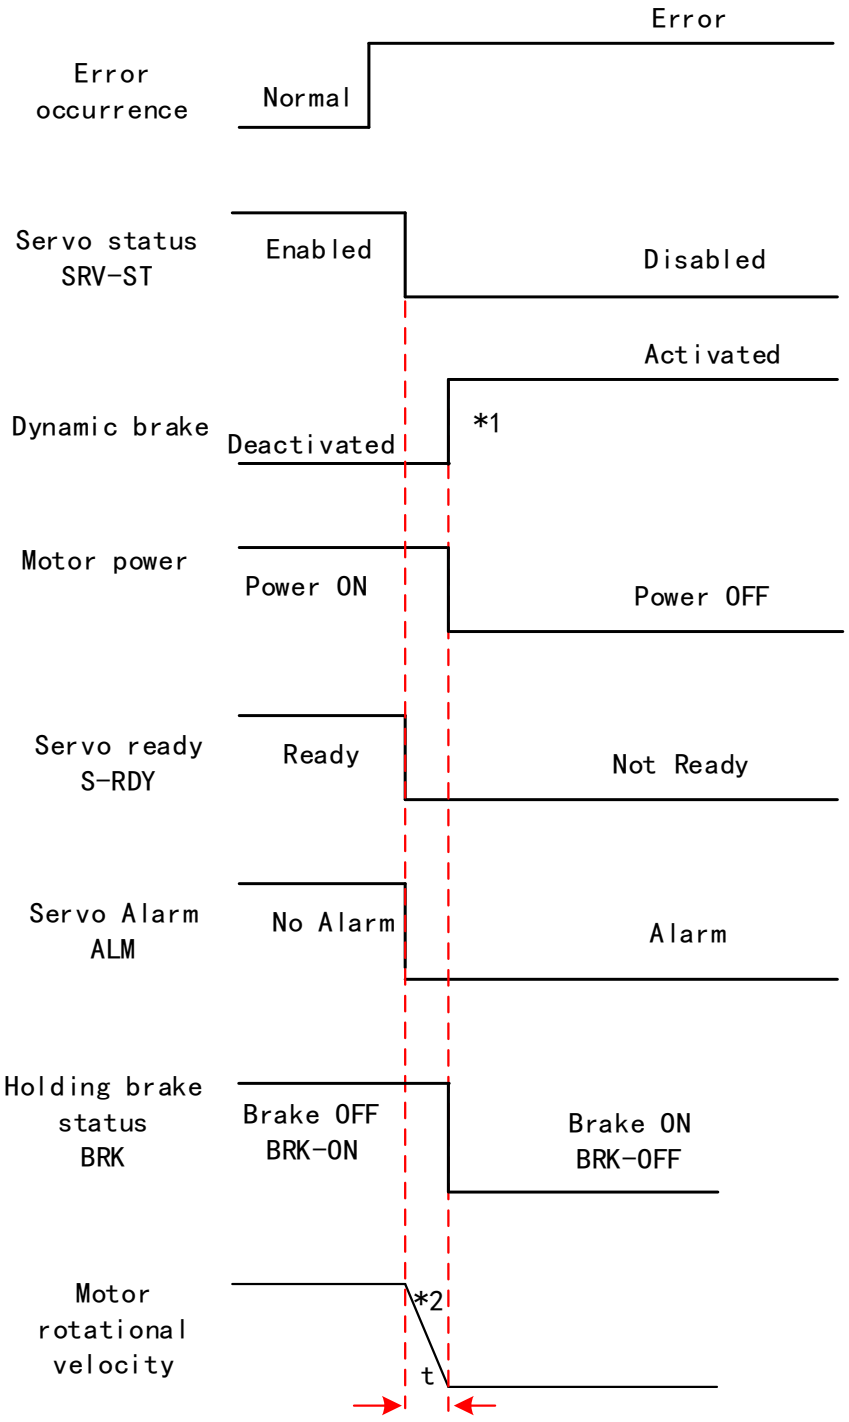


- Free stopping method. Status after stopping: Dynamic braking

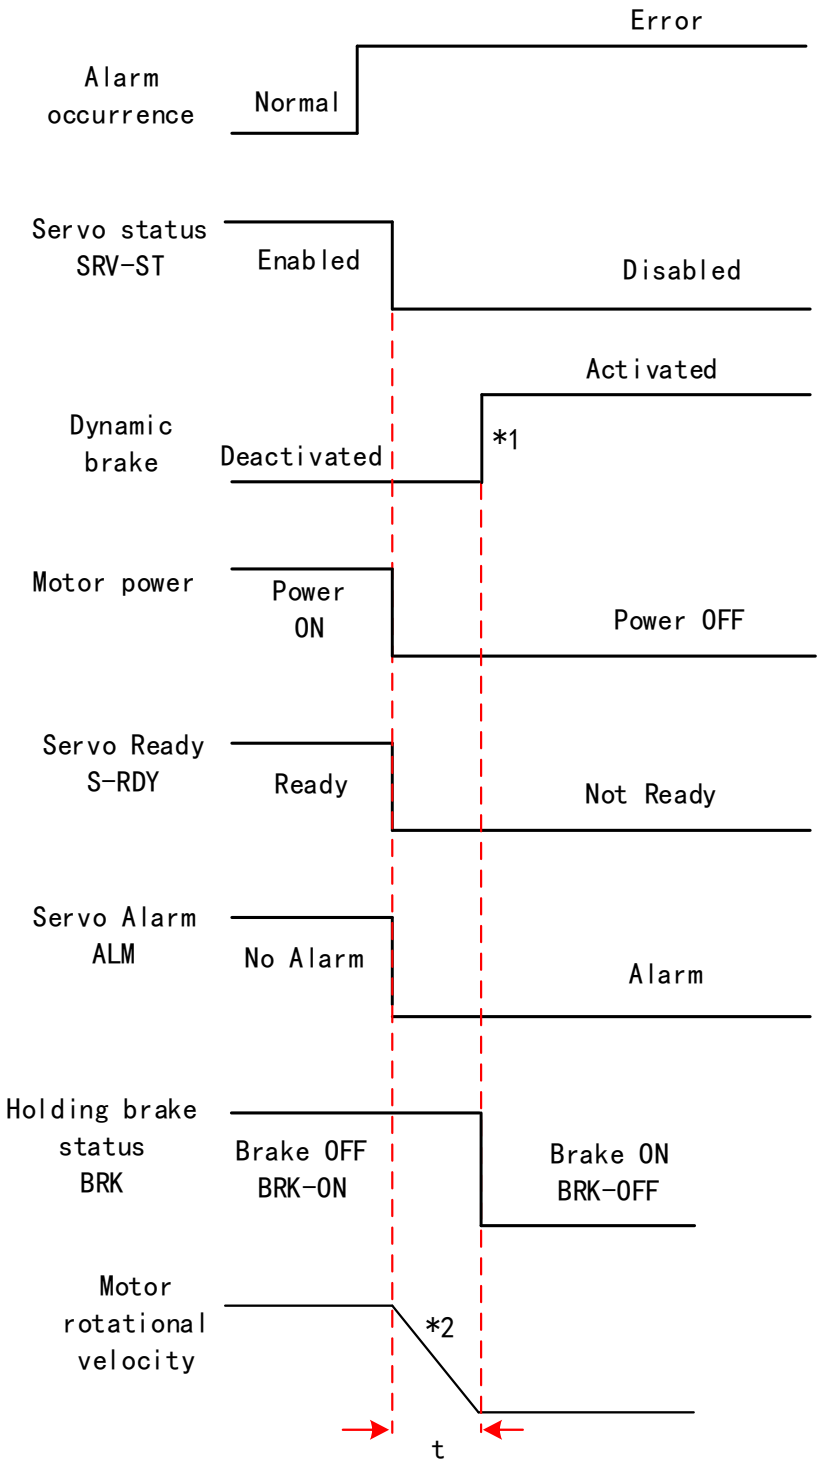


- Dynamic braking method. Status after stopping: Dynamic braking

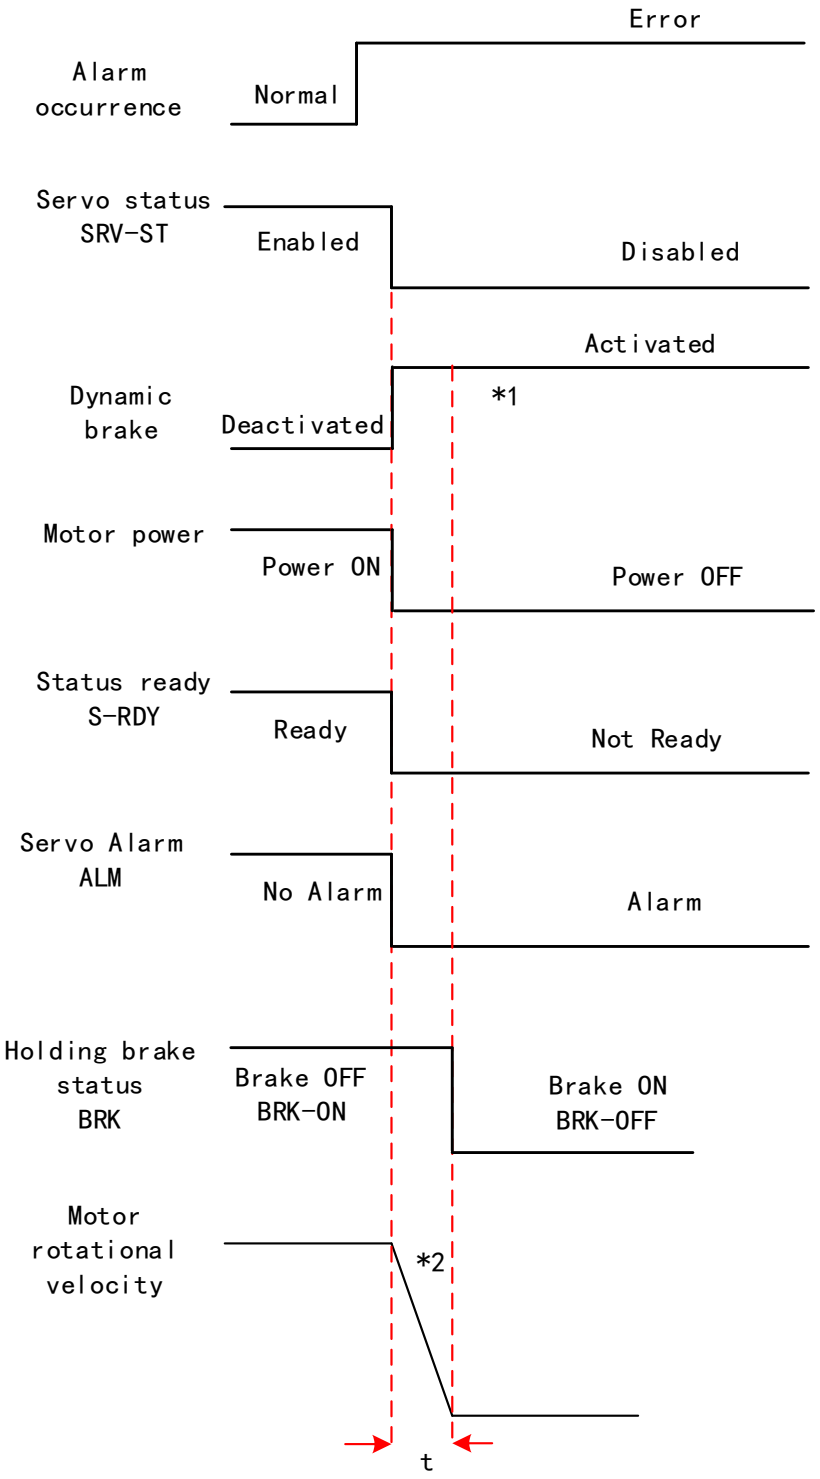


- Servo braking method. Status after stopping: Free running

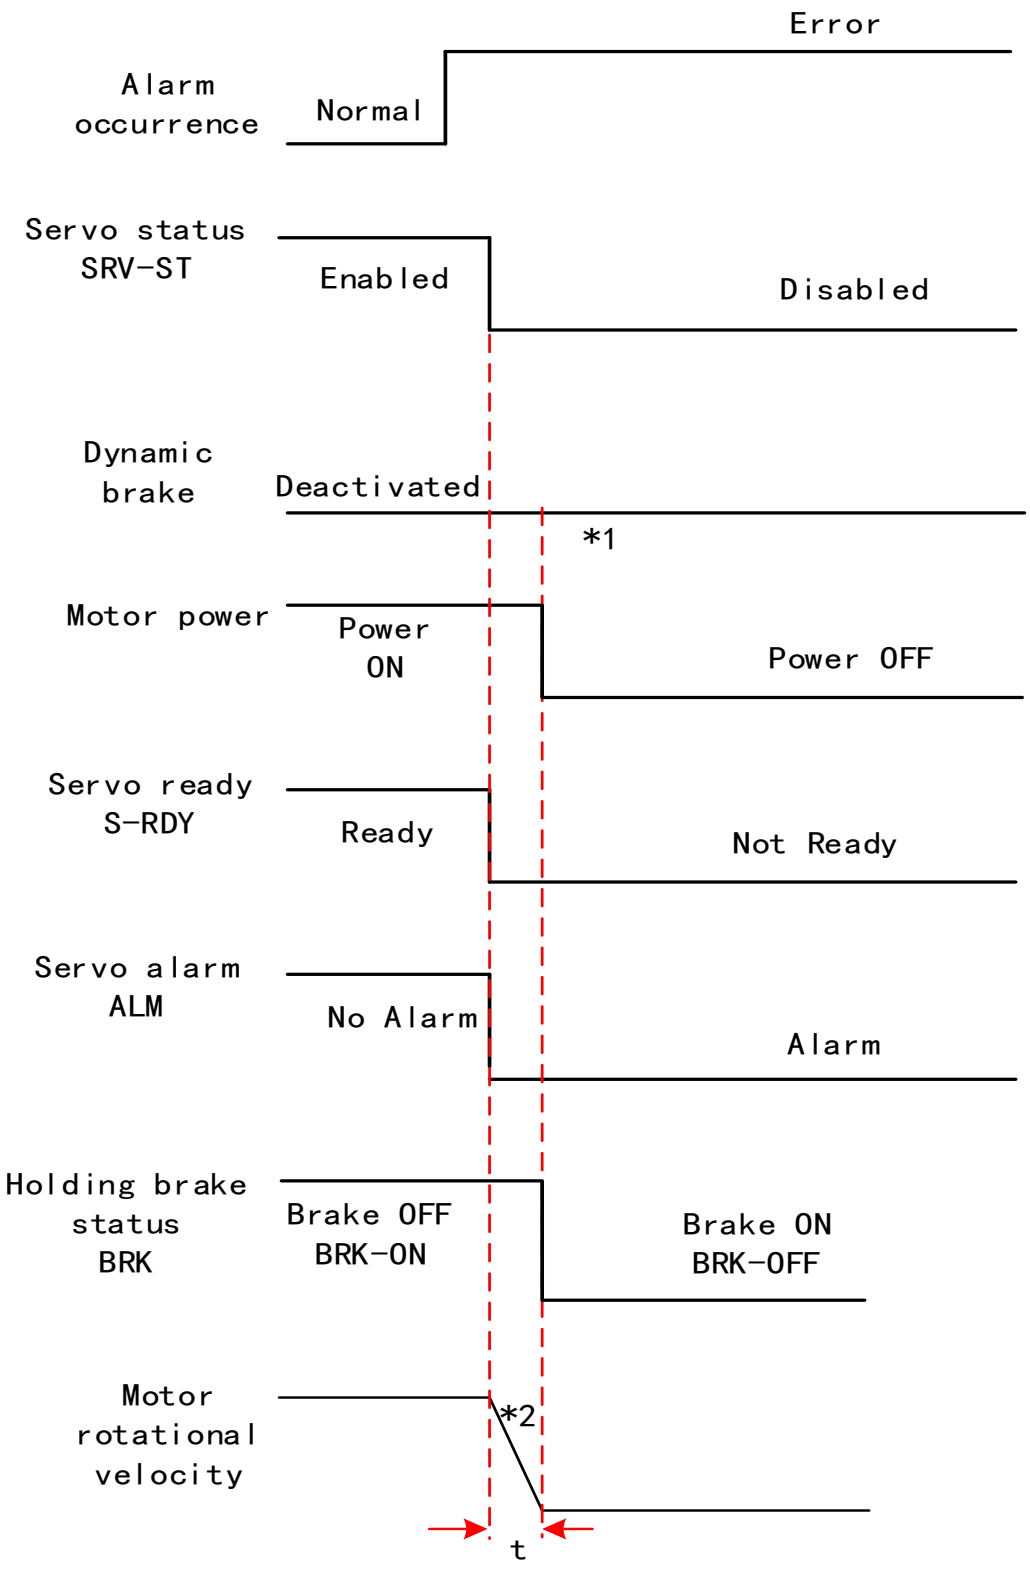

- Free stopping method. Status after stopping: Free running

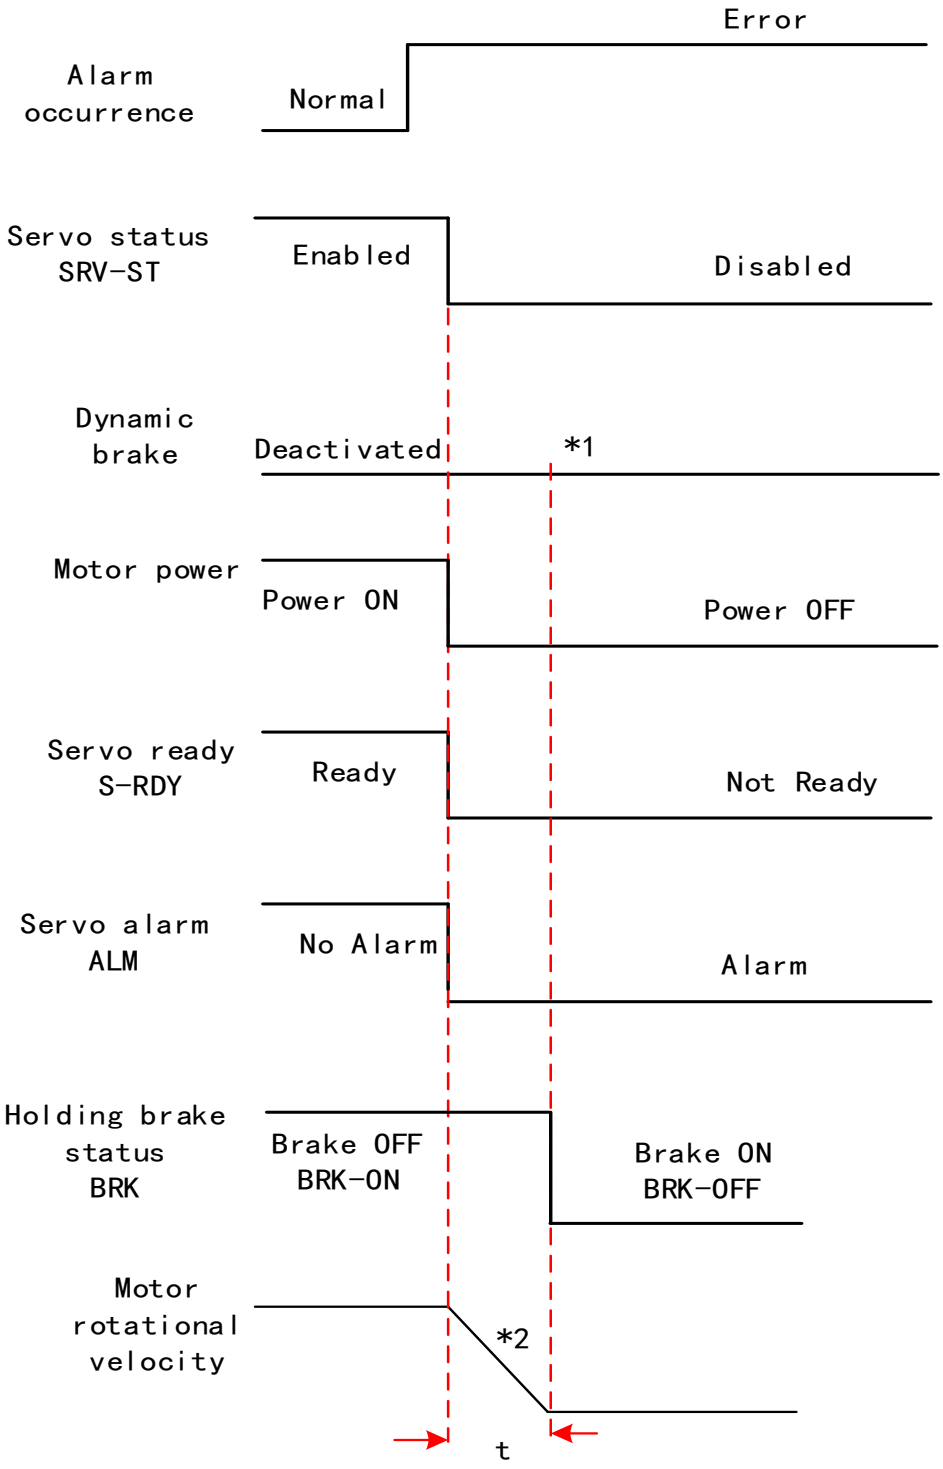

- Dynamic braking. Status after stopping: Free running

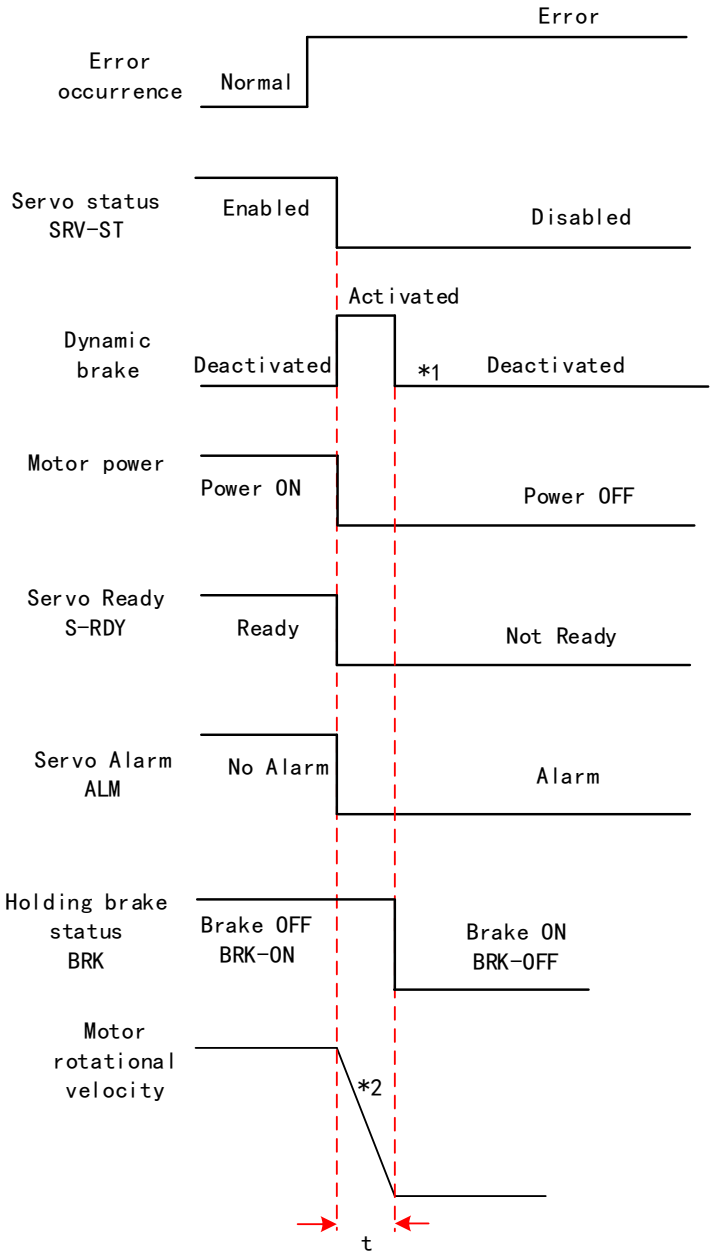


*1. Status after stopping is as defined in P05.10.

*2. Servo stopping method is as defined in P05.10. Deceleration time t is determined by whichever comes first between time set in P06.14 and time needed for motor to drop below velocity set in P04.39. After deceleration time t, dynamic braking will be off and holding brake signal will be set to OFF (Holding brake is activated. Although BRK-OFF signal is valid, actual activation of holding brake is dependent on whether the motor comes with holding brake).

3. BRK-ON signal doesn't indicate the activation of holding brake but the invalidation of the signal. Holding brake is not applied when BRK-ON signal is valid. Same idea goes for BRK-OFF signal.

Alarm Clearing

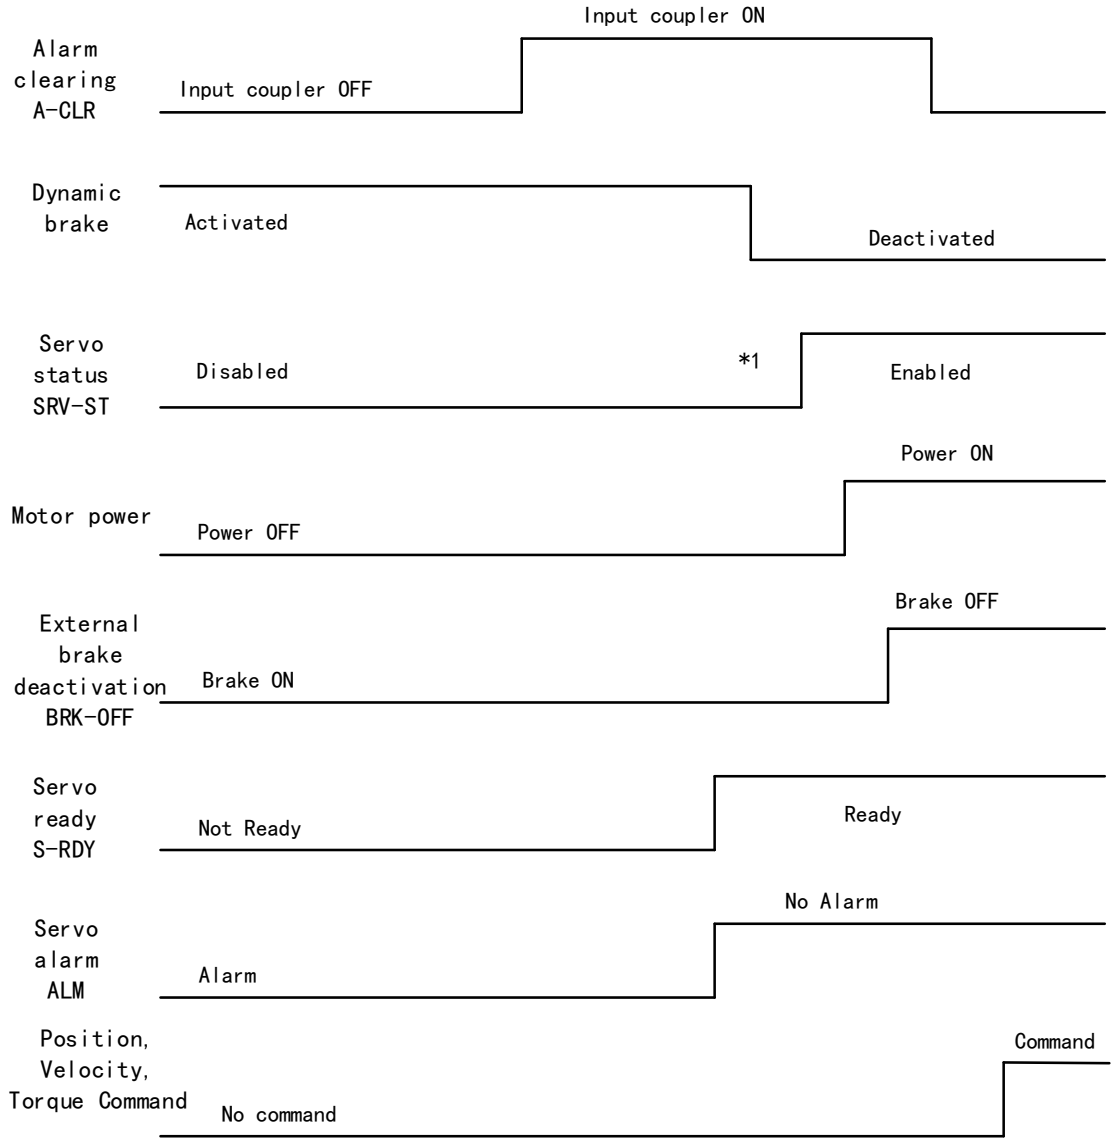

*1.SRV-ST signal is received when servo driver is enabled. Command input is not allowed yet.

*2. BRK-OFF signal doesn't indicate the deactivation of holding brake but the invalidation of the signal. Holding brake is applied when BRK-OFF signal is invalid.